

```

TeraTerm Web 3.1 - COM4-VT
Copyright (c) 2002 - 2006 Trapeze Networks, Inc. All rights reserved.

Username:
Password:

MXR-2-30E945> en

Enter password:

MXR-2-30E945# quickstart
This will erase any existing config. Continue? [n]: y
Answer the following questions. Enter '?' for help. 00 to back out.


Enter the time (hh:mm:ss) [?]: 09:48:00
Enter the time (hh:mm:ss) [?]: 09:48:00
Enter the timezone [?]: GMT+8
Enter the offset from GMT for GMT+8? In hh:mm
[?]: 08:00

MXR-2# save conf
success. configuration saved.
MXR-2# reset sys
This will reset the entire system. Are you sure (y/n)y

```

[illegible]

3.	Network Plan	CN
----	--------------	----




Upload MX

IP Address: 192.168.1.20



Enable Password: [REDACTED]


Updated [Enable Password] Value [044f19071f24564b]

< Previous **Next >** Finish Cancel

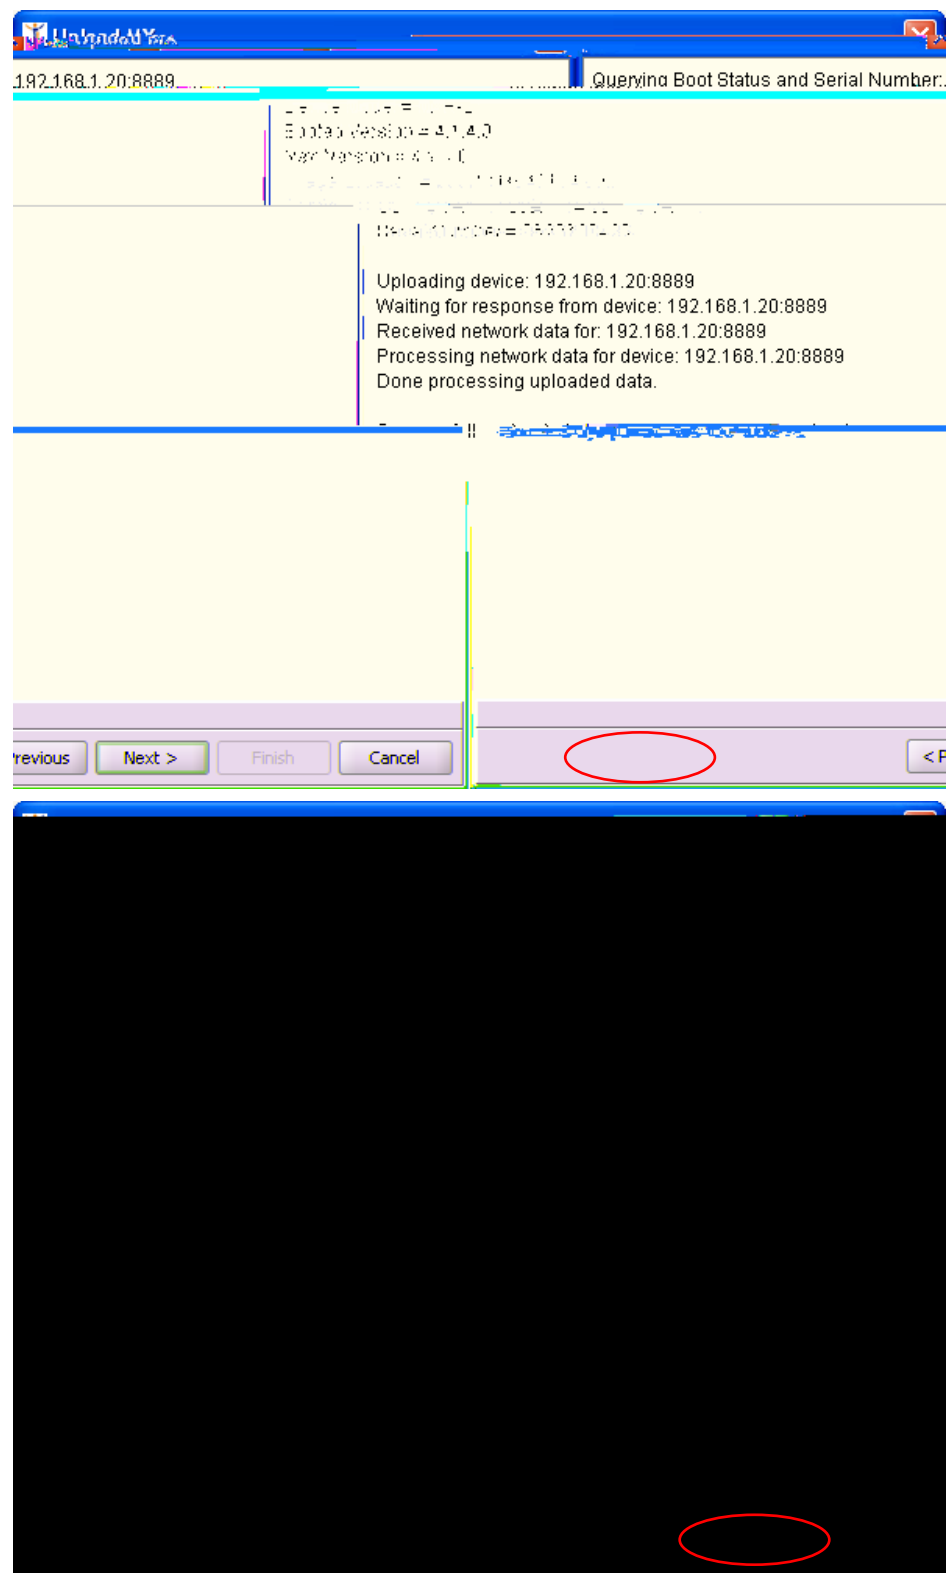


4. vlan

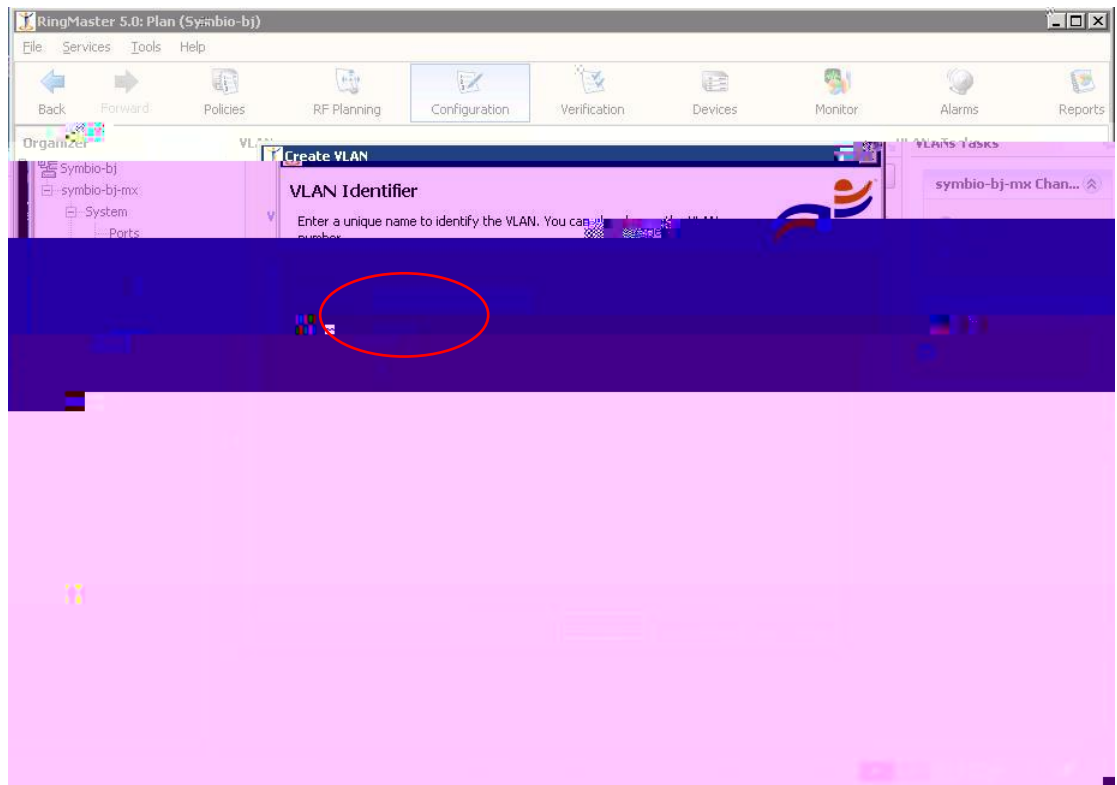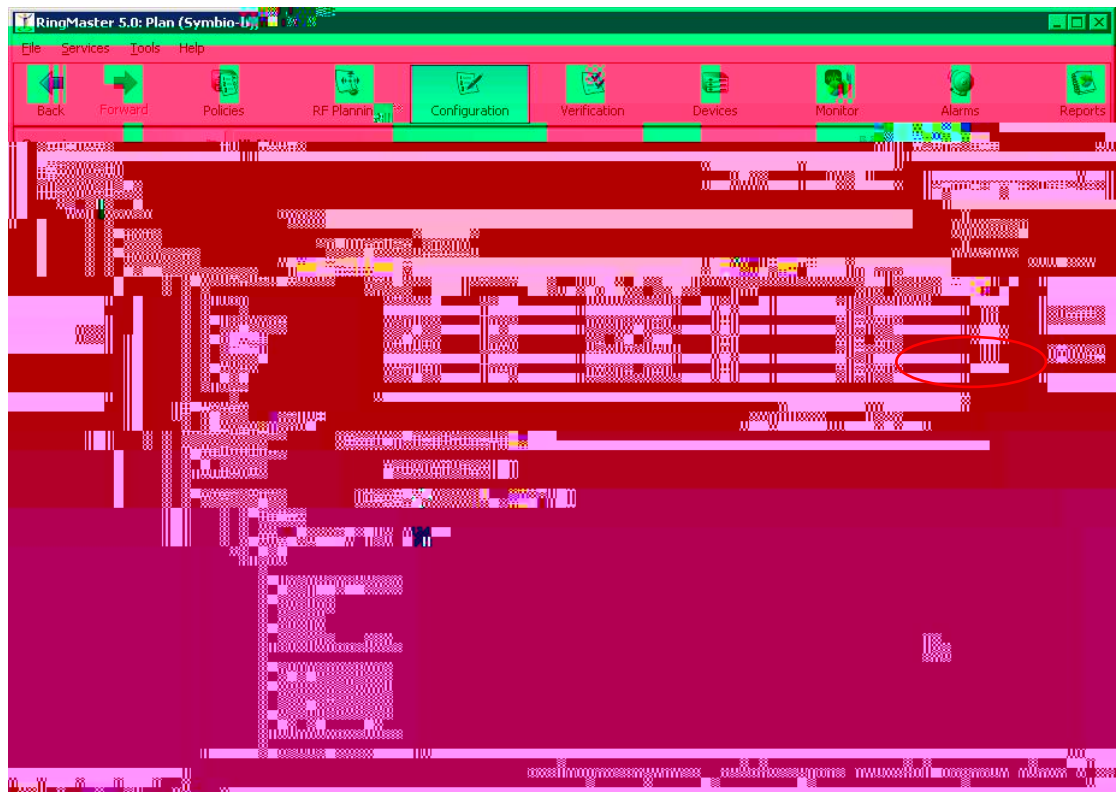


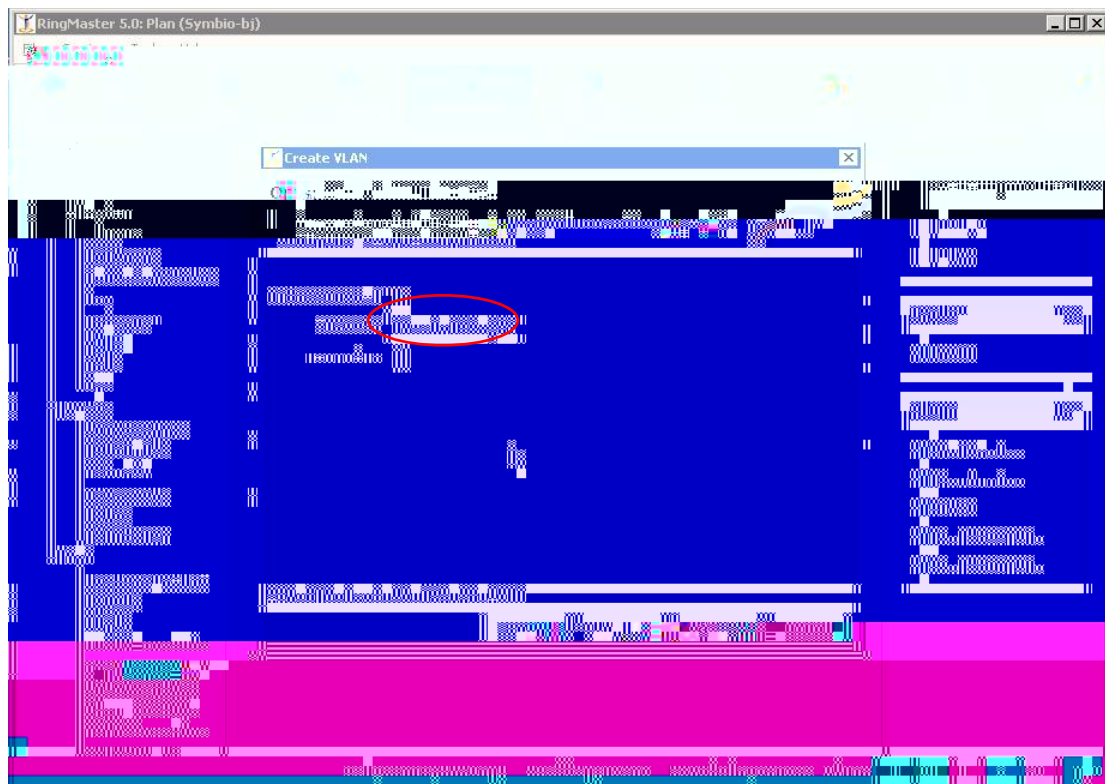


vlan ip addr

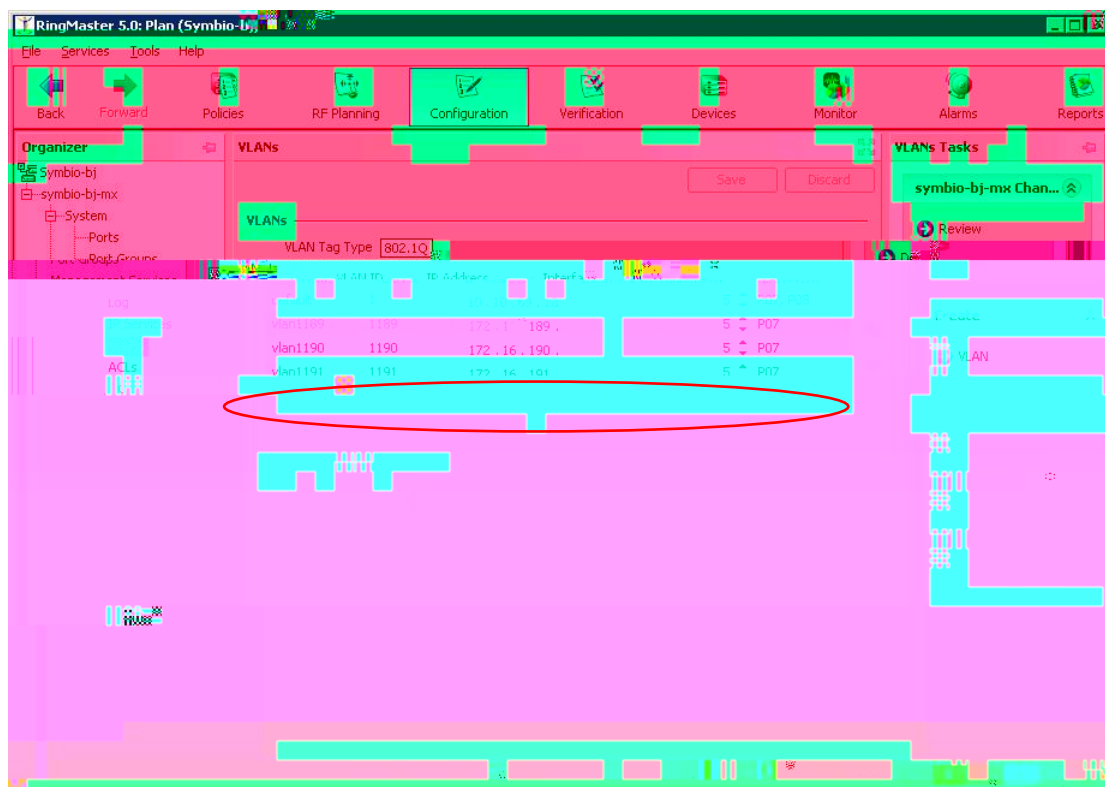


vlan

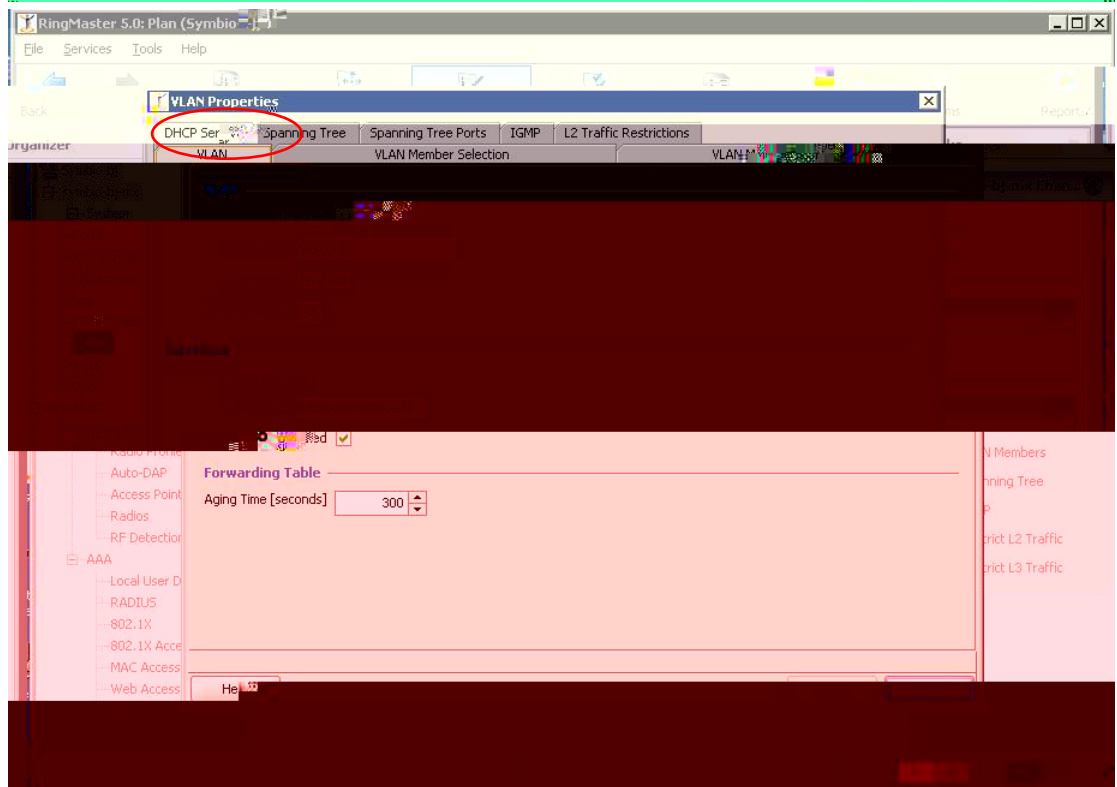

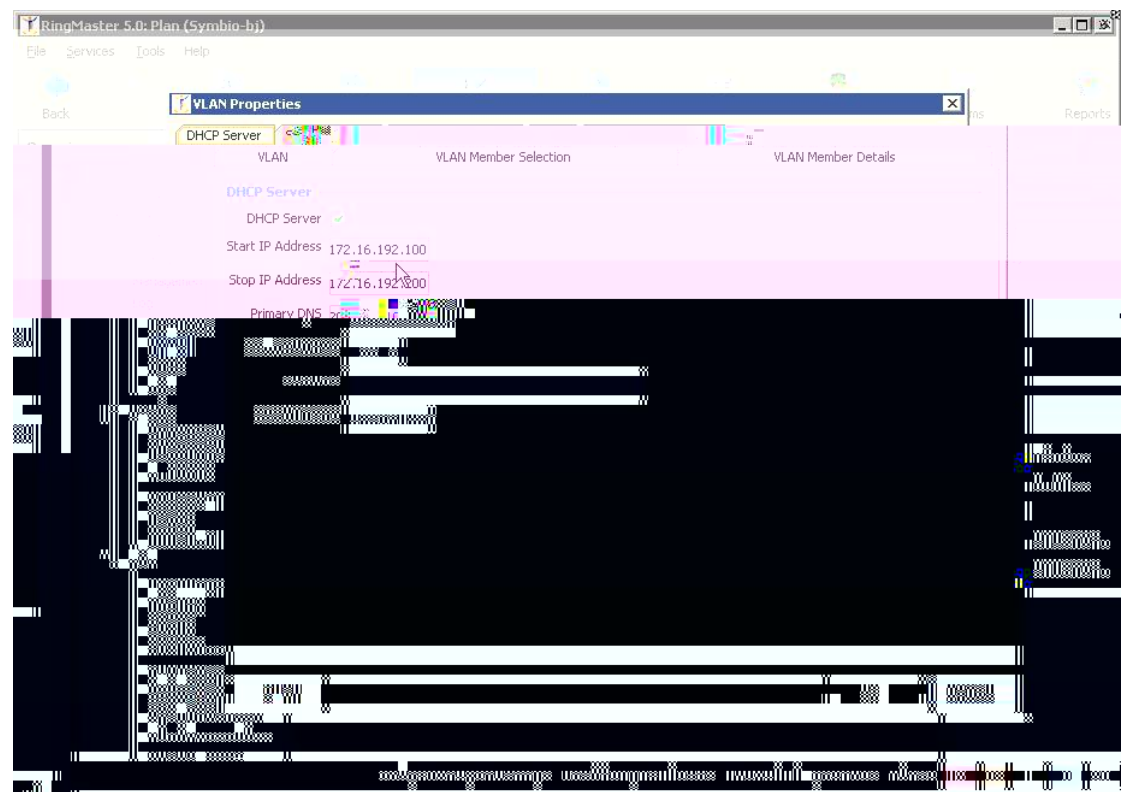


vlan dhcp

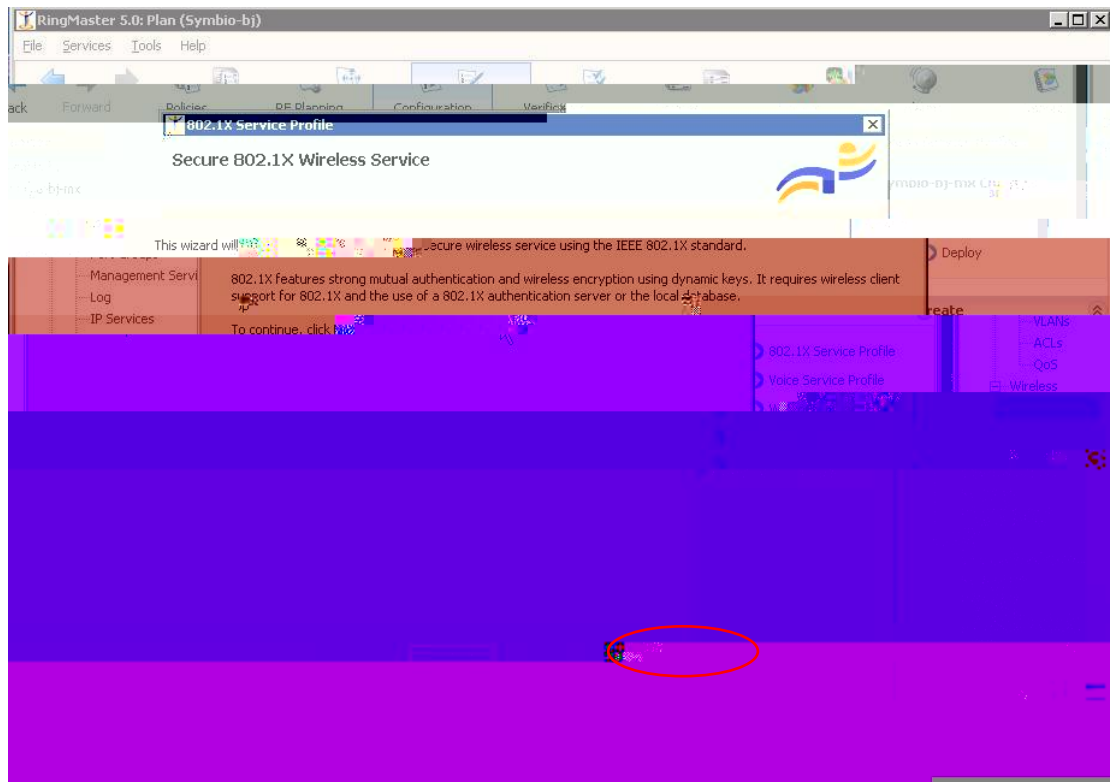

Service Profile



802.1X Service Profile

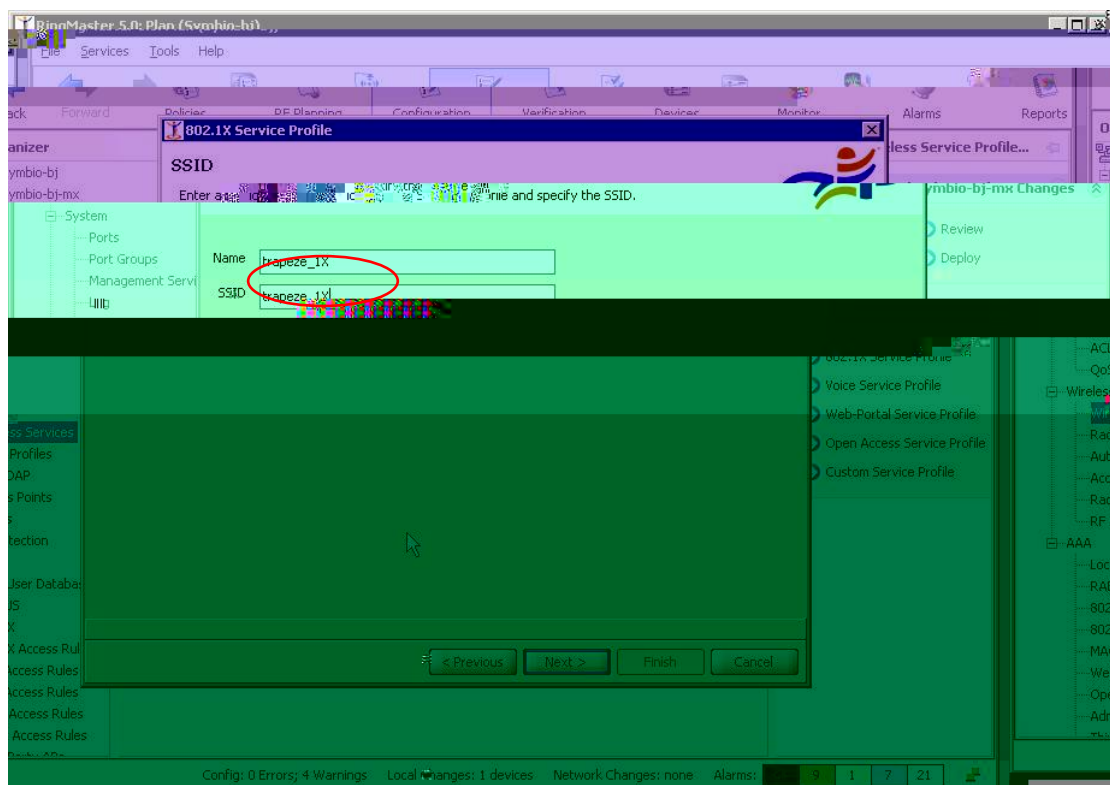


SSID


trapeze_1X


SSID

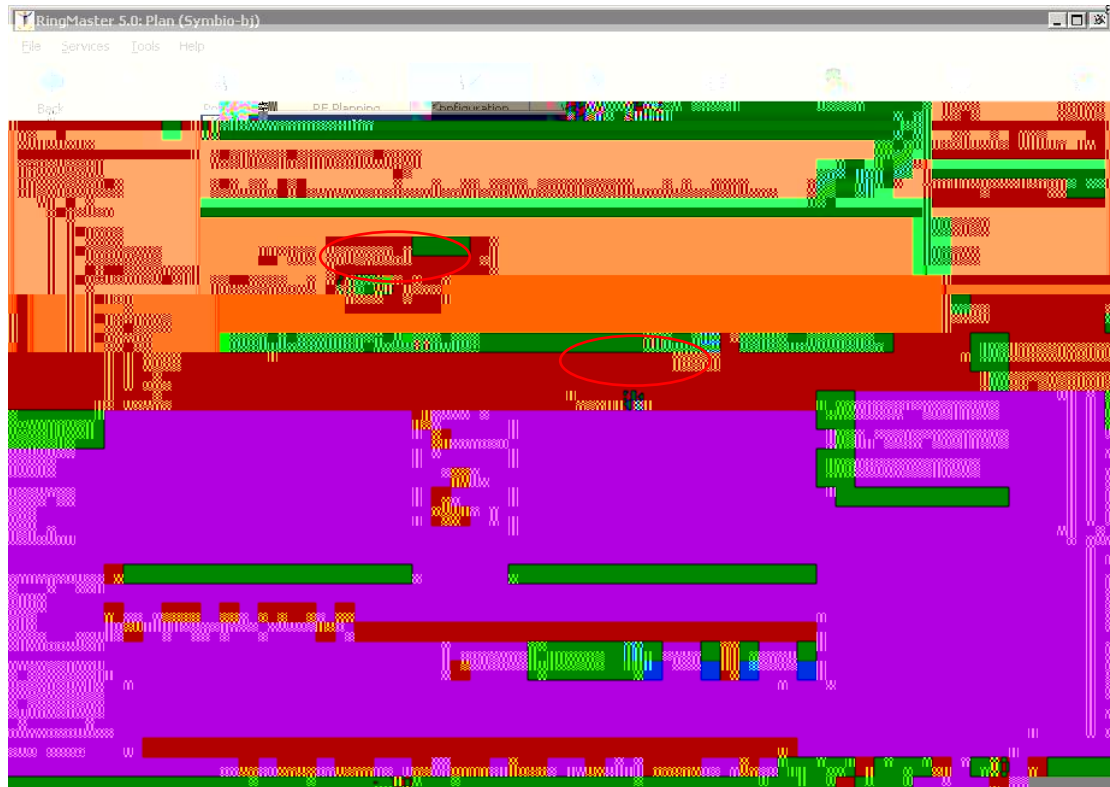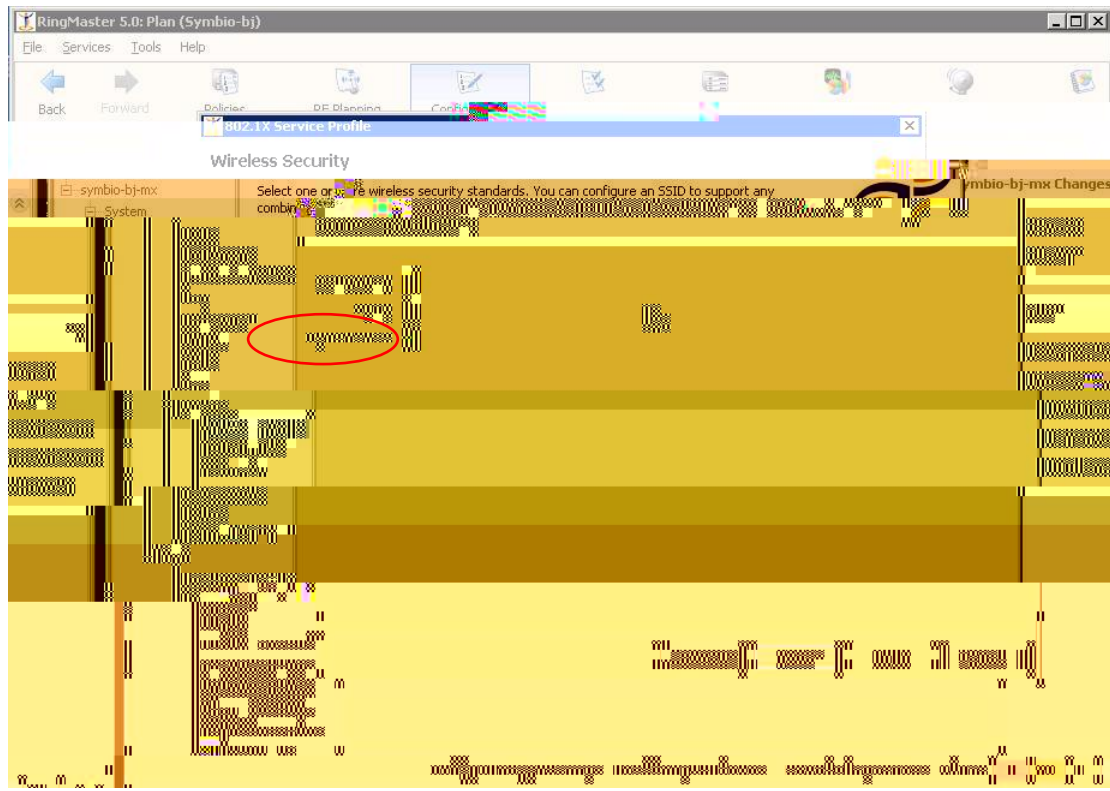

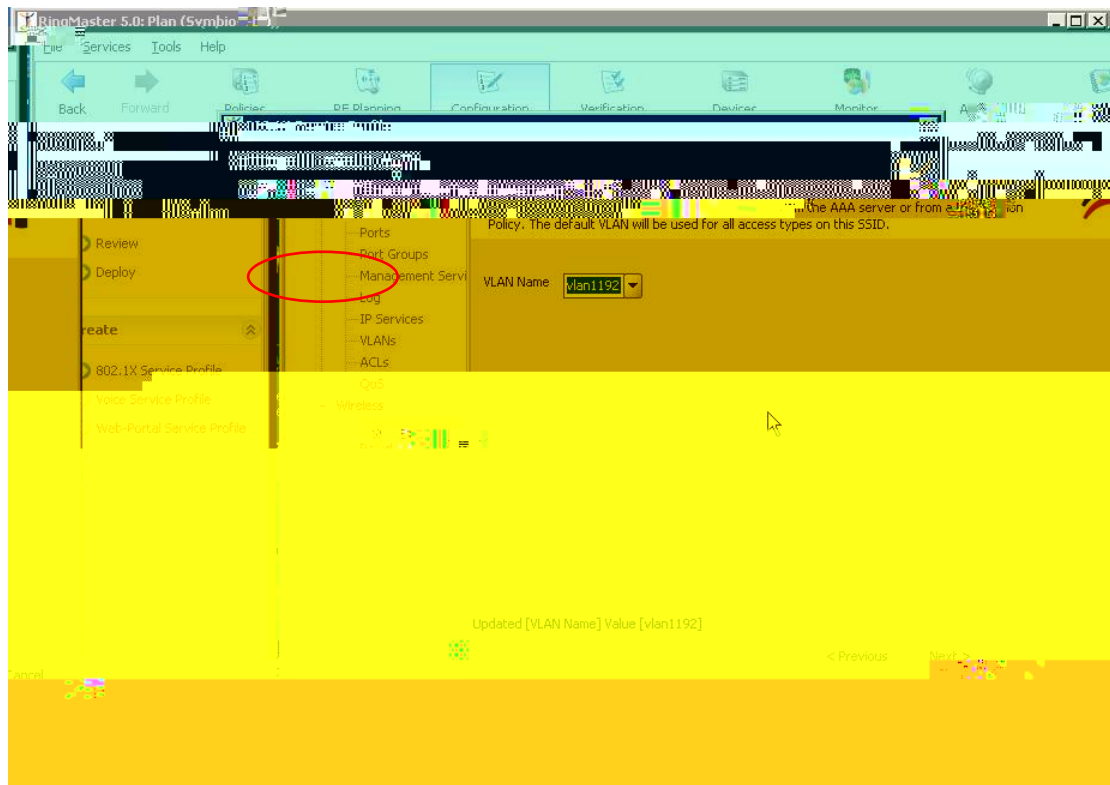


Service vlan name

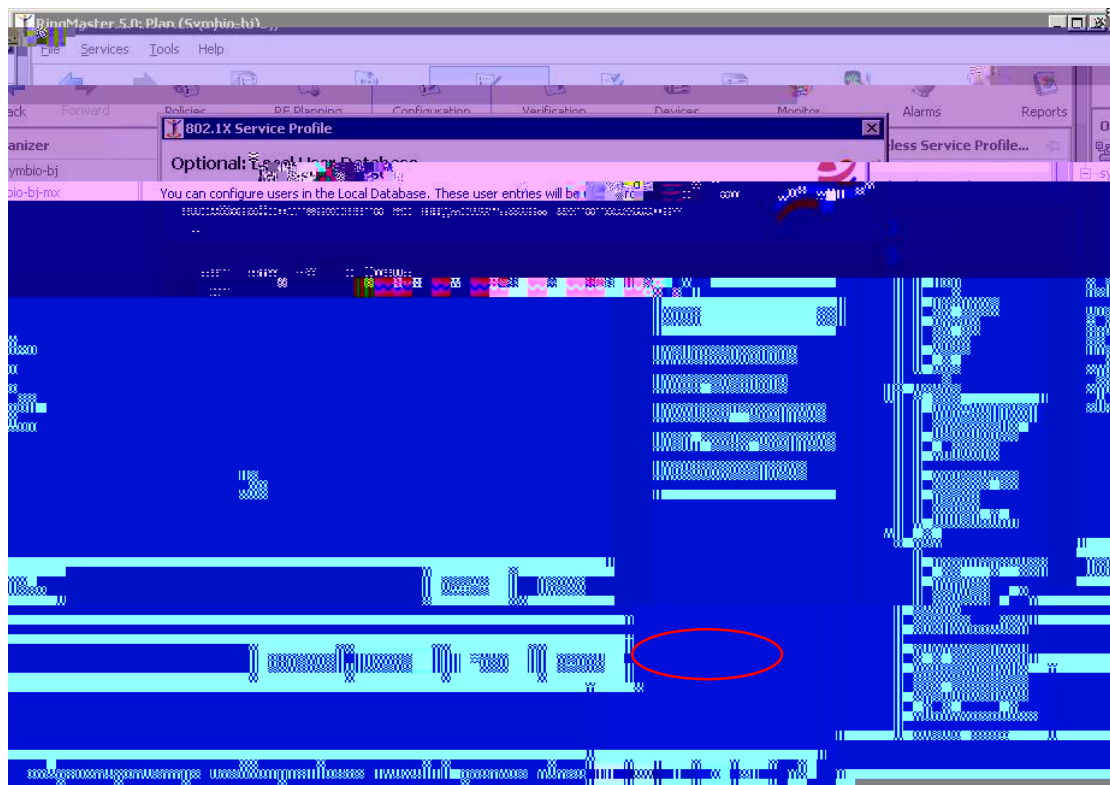

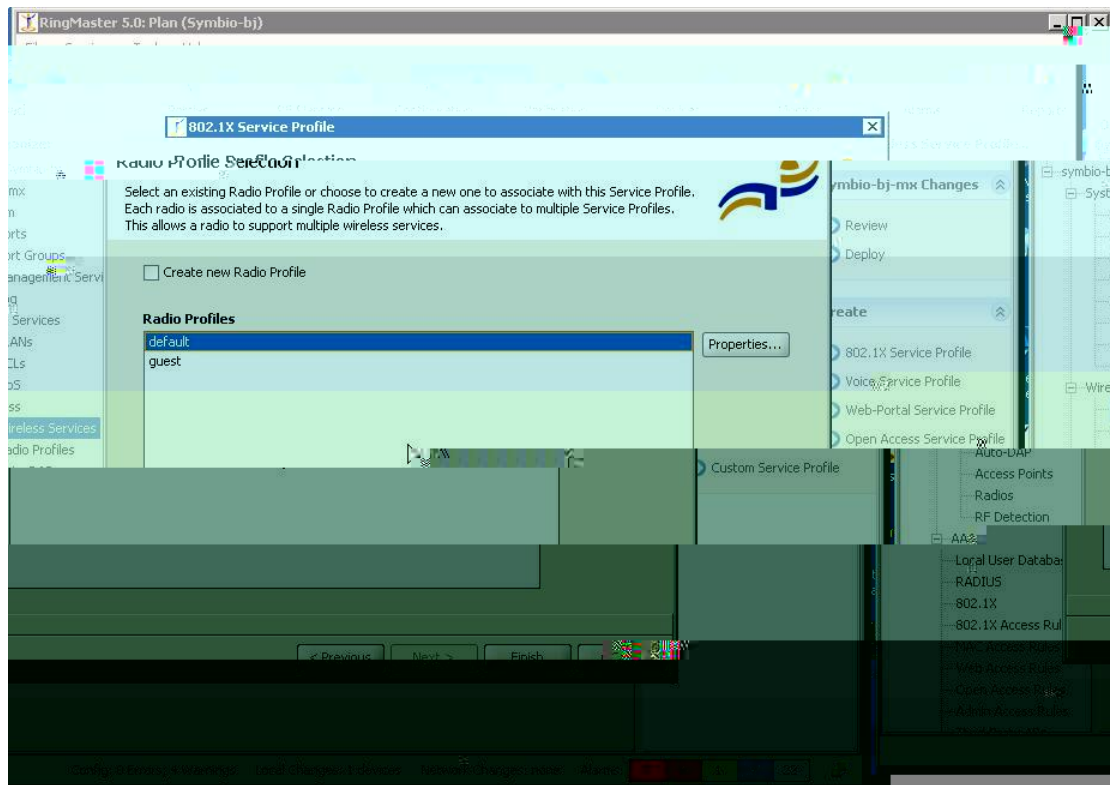

6. AP

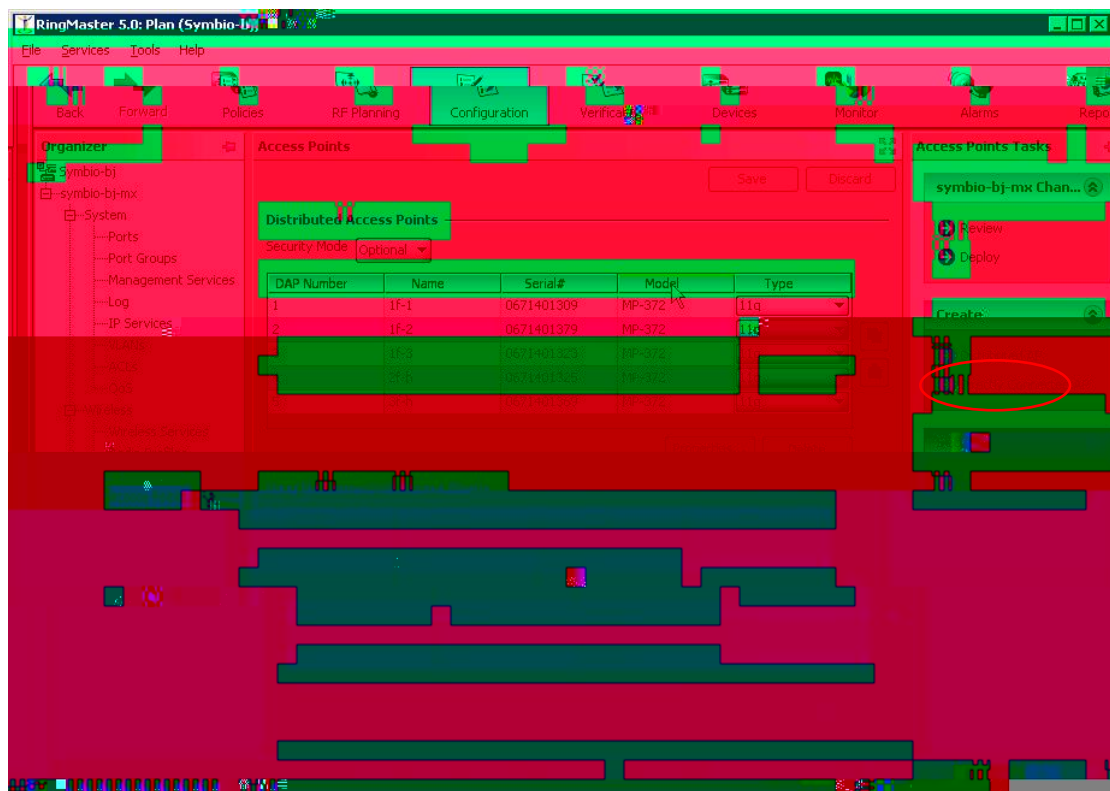

RingMaster 5.0: Plan (Symbio-bj)

File Services Tools Help

Back Policies RF Planning Configuration Verification Devices Monitor Alarms Reports

Organizer

Port Groups
Management Services
Log
IP Services
VLANs
ACLs
QoS
Access
Wireless Services
Radio Profiles
Auto-DAP
Radios
RF Detection
Local User Database
RADIUS
802.1X

Name: DAP06

DAP Number: 6

Serial Number: 0671401369
Enter the serial number of the AP

Fingerprint:
Enter the fingerprint. A fingerprint is required if a secure connection is used between the MX and the AP

Updated [Serial Number] Value [0671401369]

< Previous Next > Finish

Review
Deploy


Create


- Distributed AP
- Directly Connected AP


Setup

- AP Redundancy

AP AP S/N

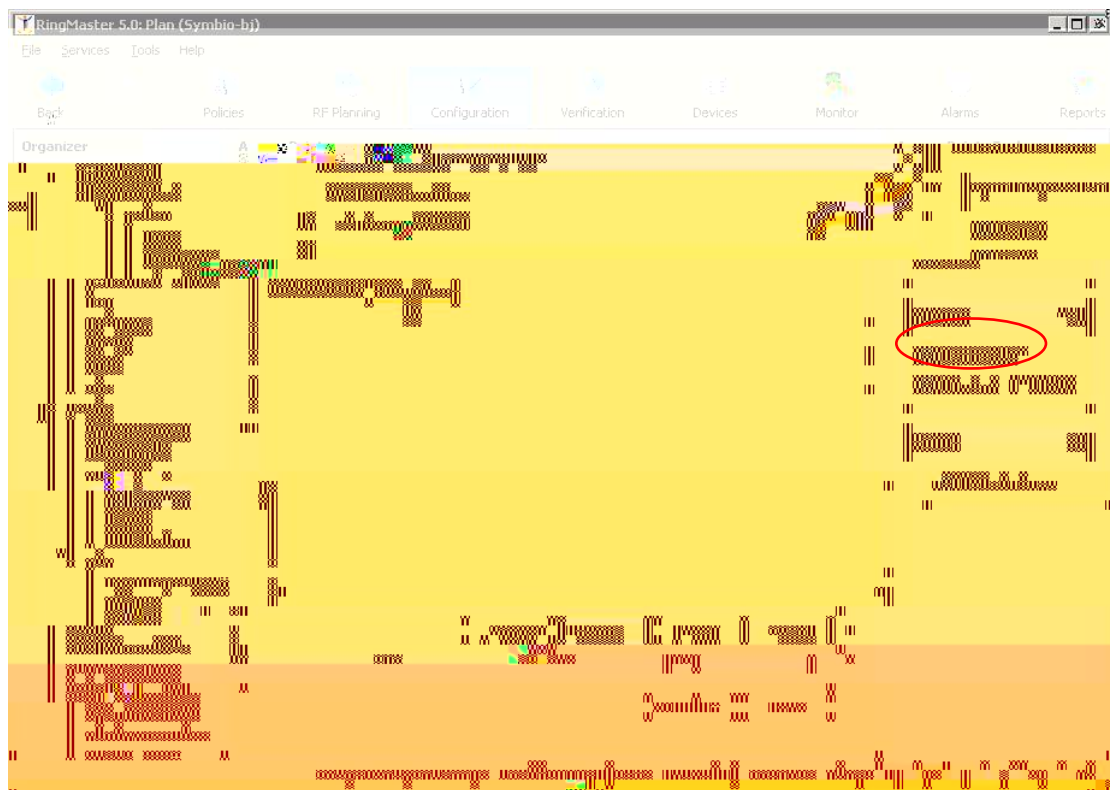

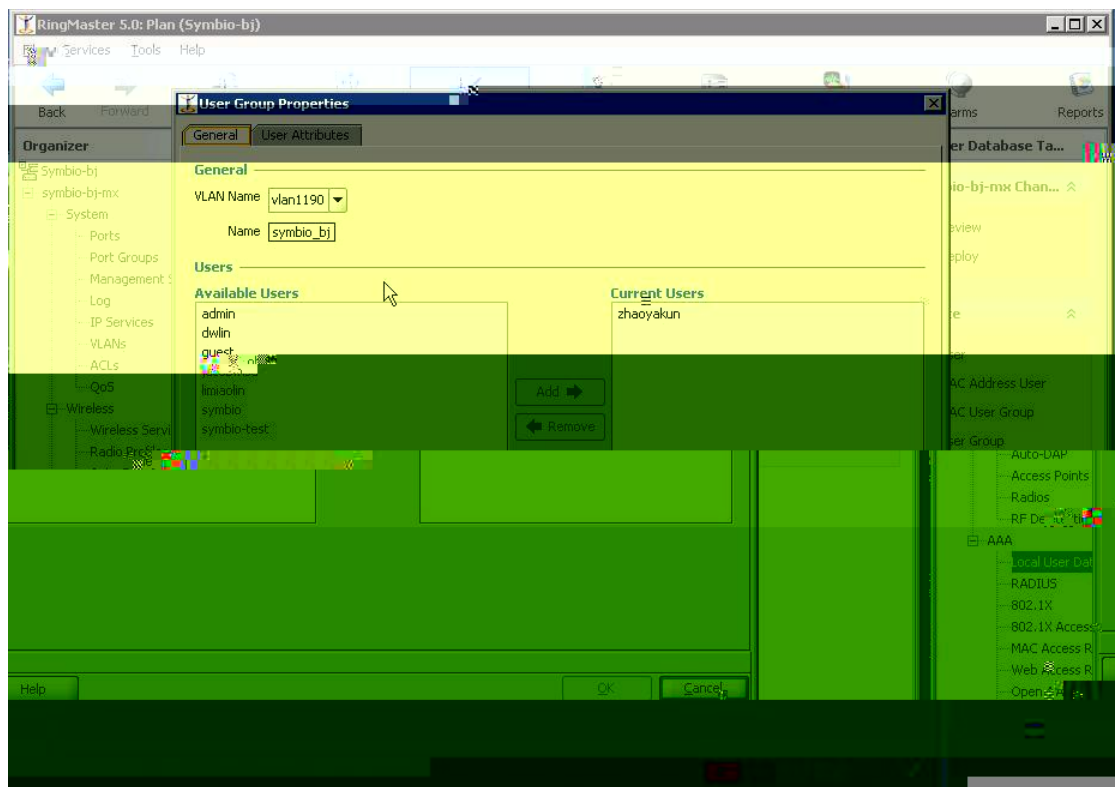

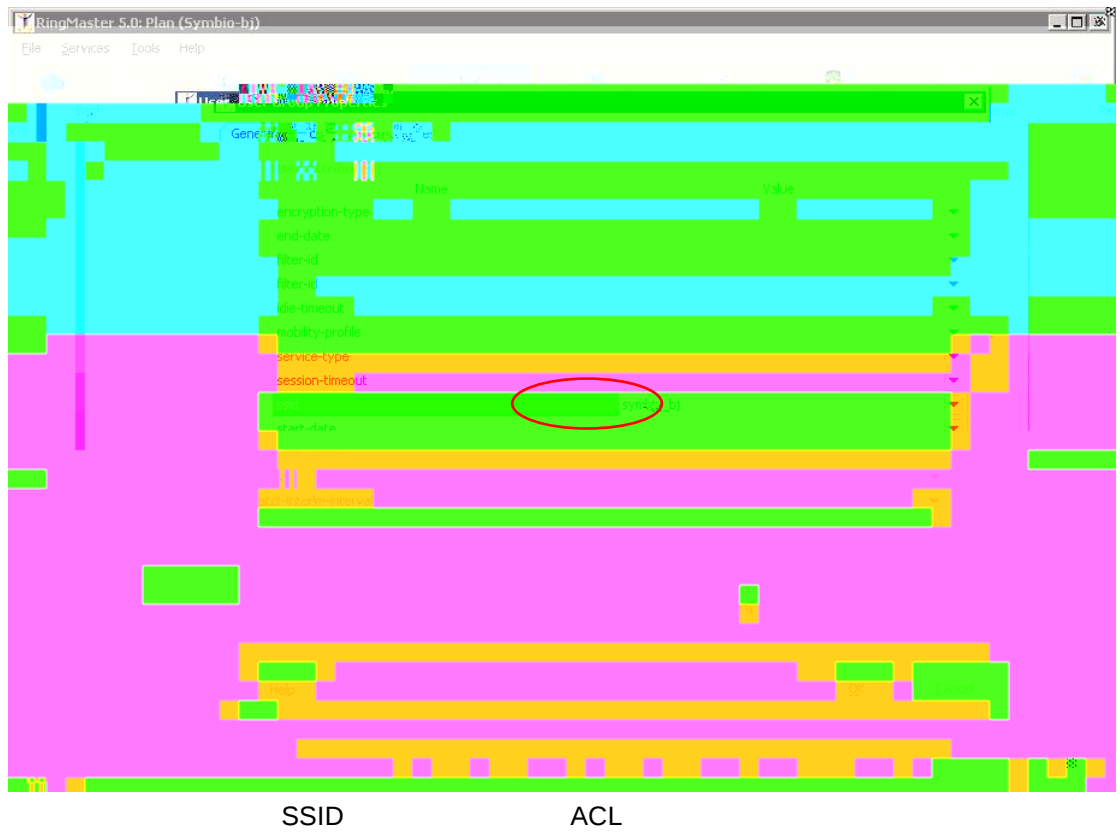

8.



