



RG-S2600-I

III

¶

¶

¶

¶

¶

¶

III



¶



¶



¶



¶



¶



¶

RGOS®

¶

RGNOS®

¶



¶



¶



¶

III

III

¶

III

V1.

III

Ч Ч

III

III

III

“ ” III
“ ” III
“ ” Ч Ч Ч III
“ ” III
“ ”

III

A“ ”III
B“Mini-GBIC”

CD-ROM

III CD-ROM

CD-ROM

CD-ROM
III

<http://www.ruijie.com.cn/>

III

І III Ч Ч
Ч Ч Ч

III

III

<http://www.ruijie.com.cn/service.aspx>

III

III

a _____

III

III

L _____

III

III

1.1

RG-S2600-I 4 4 III

, , QOS ,

III

1-1 RG-S2600-I

	10/100Base-T	10/100/1000Base-T	1000Base-X SFP	Console
RG-S2628G-I	24	2	2	1
RG-S2652G-I	48	2	2	1

1.2 RG-S2600-I

1-2 RG-S2600-I

	RG-S2628G-I	RG-S2652G-I
	Mini-GBIC-SX Mini-GBIC-LX Mini-GBIC-LH40 Mini-GBIC-ZX50 Mini-GBIC-ZX80 Mini-GBIC-ZX100 1000Base-T Mini-GBIC-GT III	
SFP	1000Base-X	
	50-60Hz 2A	
	20W	25W
	0℃ 50℃ : -40℃ 70℃	
	10% 90% RH 5% 90% RH	
EMI	GB9254-1998	
	GB4943-2001	
× ×	440 × 200 × 44mm	440 × 260 × 44mm
	3.9Kg	4.2Kg

1.3 RG-S2600-I


1.3.1 RG-S2628G-I

1.3.1.1

ч


III

ч2

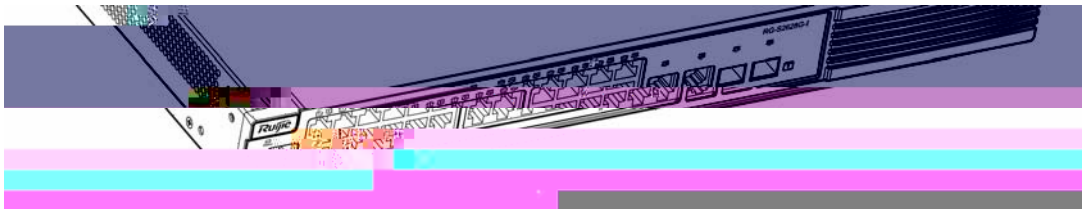

1-1 RG-S2628G-I


1.3.1.2

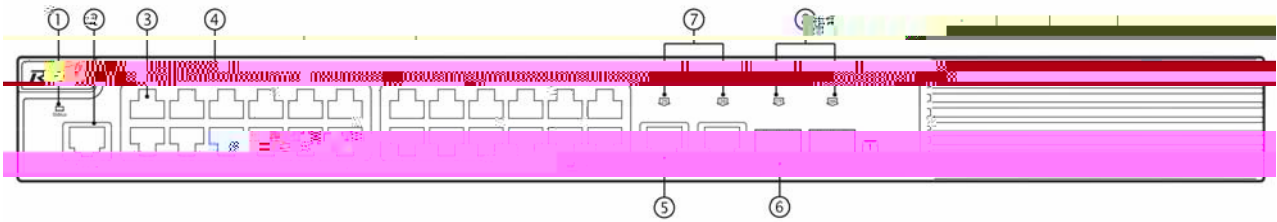

1-2 RG-S2628G-I

- 1
- 2 Console
- 3 10/100Base-T
- 4 10/100Base-T
- 5 10/100/1000Base-T
- 6 1000Base-X SFP
- 7 10/100/1000Base-T
- 8 1000Base-X SFP

1.3.1.3

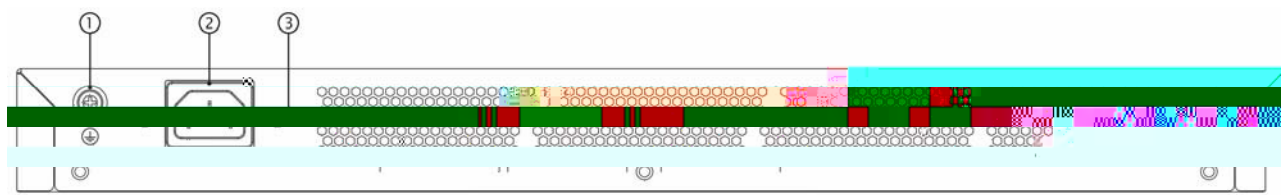

1-3 RG-S2628G-I

- 1
- 2
- 3

1.3.1.4

III

50-60Hz
2A


1.3.1.5

RG-S2628G-I III III 10cm

1.3.2 RG-S2652G-I


1.3.2.1

Ч III Ч2

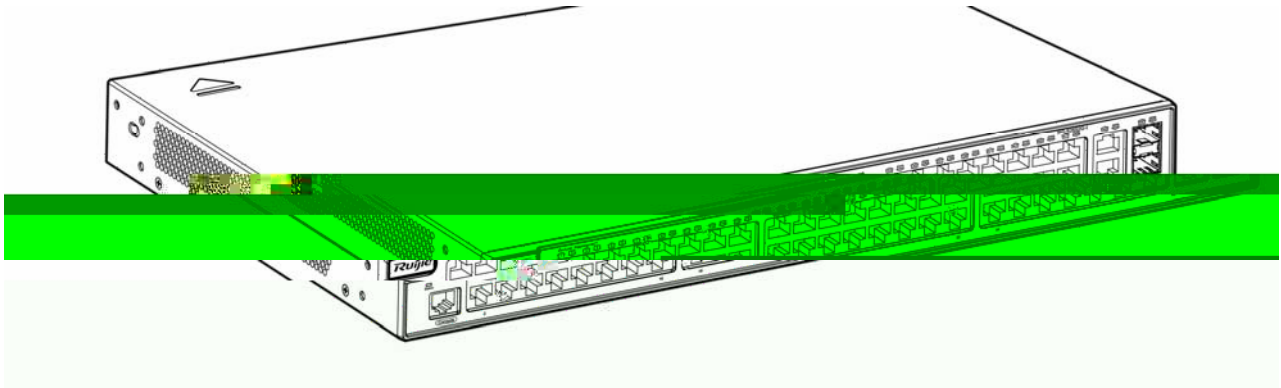

1-4 RG-S2652G-I


1.3.2.2

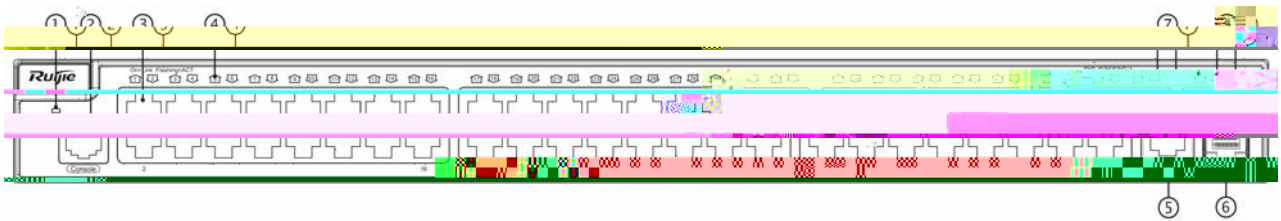

1-5 RG-S2652G-I

- 1
- 2 Console
- 3 10/100Base-T
- 4 10/100Base-T
- 5 10/100/1000Base-T
- 6 1000Base-X SFP
- 7 10/100/1000Base-T
- 8 1000Base-X SFP

1.3.2.3

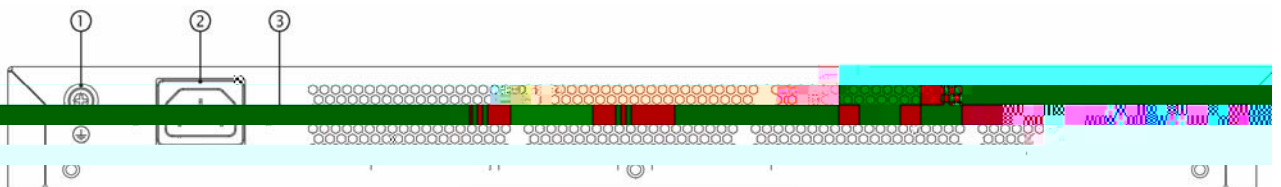

1-6 RG-S2652G-I

- 1
- 2
- 3

1.3.2.4

III

50-60Hz
2A

1.3.2.5

RG-S2652G-I

III

III

10cm

1.4 RG-S2600- I

1-3 RG-S2628G-I

	Status		
			5.2
RJ-45	1~26		Link
			Link up
SFP	27F ㄑ 28F		Link
			Link Up

1-4 RG-S2652G-I

	Status		
			5.2
RJ-45	1~50		Link
			Link Up
SFP	51F ㄑ 52F		Link
			Link Up

2.1

	RG-S2600-I	III
a	III	

2.1.1

III	III		
		III	III
		III	

2.1.2

III		
	III	III
	III	

2.1.3

		III		III	
				III	III
	III				
		III			
			III		

L	Ч			Ч	III
		Ч	III		

2.1.4

III

III

III

2.1.5

RG-S2600-I

III

III

L

III

2.2

RG-S2600-I

III

2.2.1

RG-S2600-I

10cm

III

III

2.2.2

III

Ч

III

Ч

III

III

III

RG-S2600-I

Ч

2-1

2-1 RG-S2600-I

0°C-50°C	10%-90%

a

Ч

III

1.5m

0.4m

III


III

2.3.2

Ч III III III

2.3.3

Ч Ч Ч III
III 1 III RG-S2600-I 1 2-1III

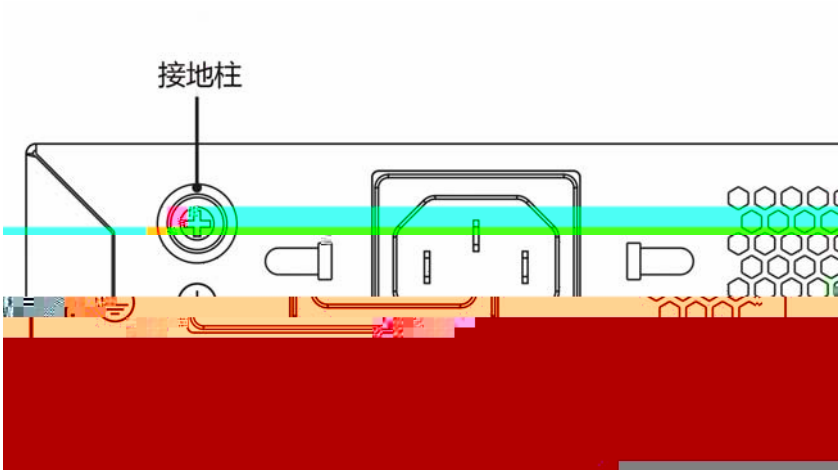

2-1 RG-S2600-I

2.4

III Ч III
III

a

III III

2.5 EMI

III III III
III

III
III
III
III
III
III
III
III

2.6

,
,
,
III

2.7

2-4


	ч	ч	ч	ч	ч

a
RG-S2600-I
III

a

III
III

3.1

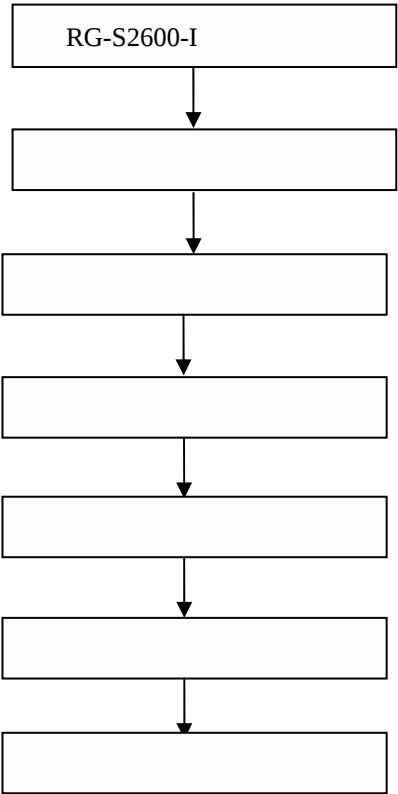


3.2

III
III
III
III

3.3 RG-S2600-I

3.3.1

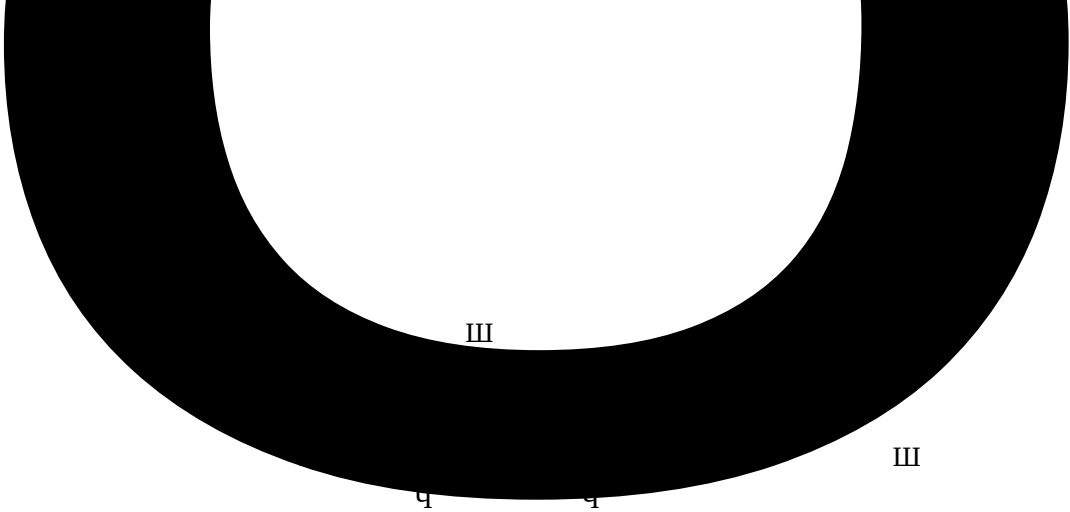

III

III

q

q

: 4 III
: III

3.4


a

ψ
ψ III
10 III

4.1

4.1.1

PC Console . 4-1 :

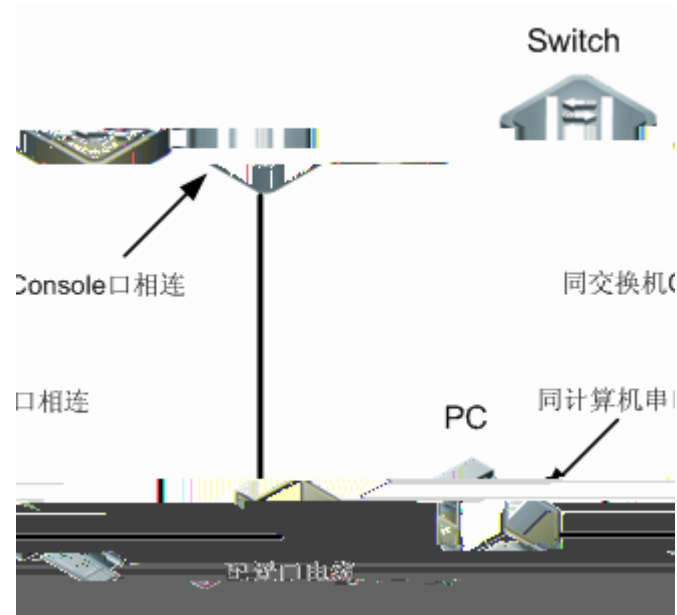

4-1

4.1.2


III

III

4.1.3

PC	PC	Windows3.1	Terminal	Windows 95/98/NT/2000/XP
III	III	9600	8	1

III
(1)

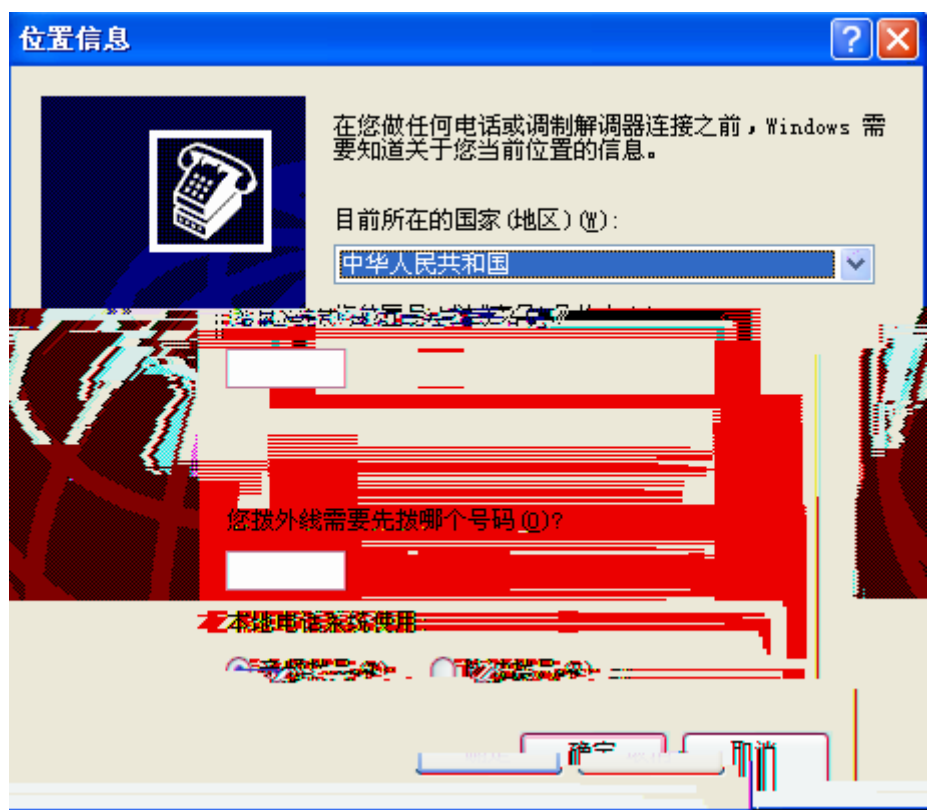

4-2

(2) f L

4-3

III



4-3

(3)


< >

\$



4-4

(4)

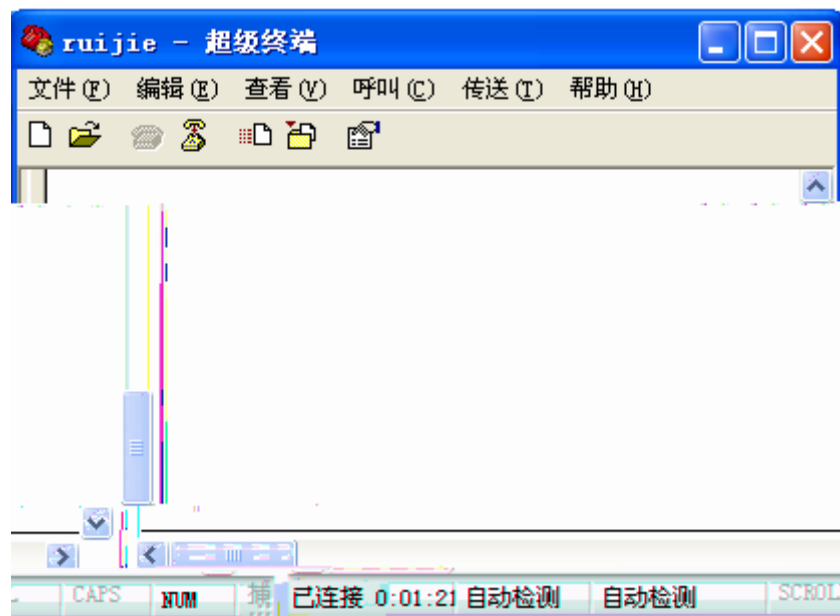

4-6

4.2

4.2.1

III

III


PC

III

4.2.2

III

5.1

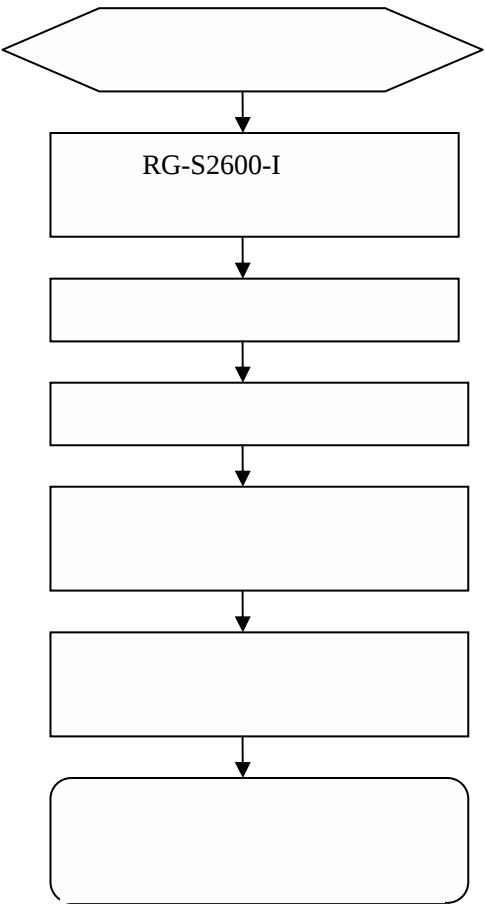

5.2

	-	
status		
Status		
		III

RJ45	100	

A —

Ч 1000BASE-T/100BASE-TX/10BASE-T

1000BASE-T/100BASE-TX/10BASE-T


MDI/MDIX Crossover III 1000BASE-T IEEE 802.3ab STP 100-ohm 5 III

5 UTP STP STP 100

1000BASE-T 4 4 III 1000BASE-T

A-1

A-1 1000BASE-T

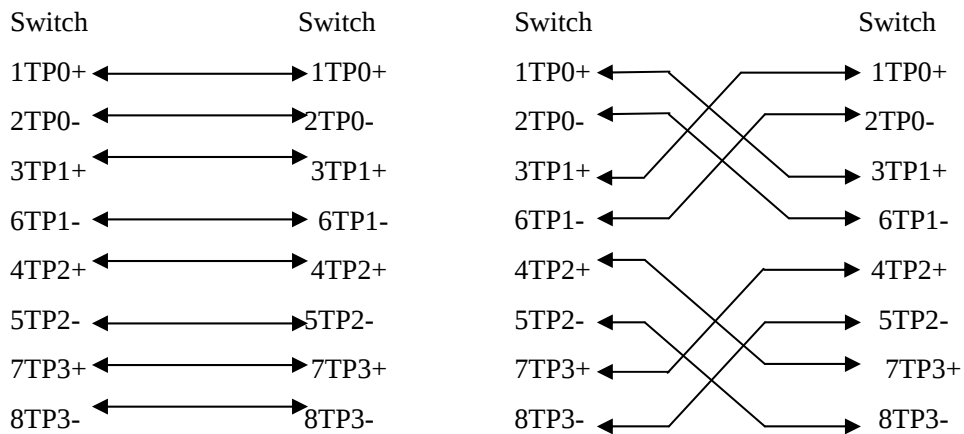

100BASE-TX/10BASE-T 10Mbps 100-ohm 5 10Mbps 100-ohm 3,4,5 III


100BASE-TX/10BASE-T A-2:

A-2 100BASE-TX/10BASE-T

100BASE-TX/10BASE-T , A-3

A-3 100BASE-TX/10BASE-T

A-4:

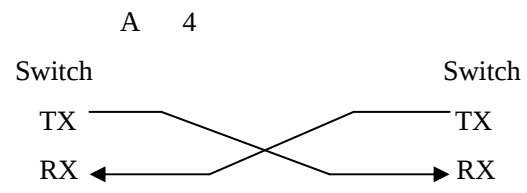

B —Mini-GBIC

		SFP	SFP	Mini-GBIC
III				SFP
¶ Mini-GBIC				

B-1 SFP

Mini-GBIC SFP	nm			MHz / km		dbm MAX	dbm MAX	
FE-SFP-LX-MM1310	1310		62.5/125	N/A	2	-14	-14	IEEE802.3
FE-SFP-LH15-SM1310	1310		9/125	N/A	15	-8	-8	
Mini-GBIC-SX	850		62.5 62.5 50.0 50.0	160 200 400 500	220 275 500 550	-4	-17	
Mini-GBIC-LX	1310		62.5 50.0 50.0 9/10	500 400 500 N/A	550 550 550 10	-3	-20	
Mini-GBIC-LH40	1310		9/125	N/A	40	3	-3	
Mini-GBIC-ZX50	1550		N/A	N/A	50	0	-22	
Mini-GBIC-ZX80					80	4.7	-22	
Mini-GBIC-ZX100					100	5	-9	
Mini-GBIC-GT	N/A	CAT 5 UTP	N/A	N/A	100	N/A	N/A	

a

40
III
40