

RG-IS2700G ʎ 'O ū

○ ů "Ω

copyright © 2023




"Ω

4 1

ǎ ŭ ǎ ĭ

7*24h

7*24h





/


2. 〰


1 4

RG-IS2700G
QOS

RG-IS2700G 4 'O 0




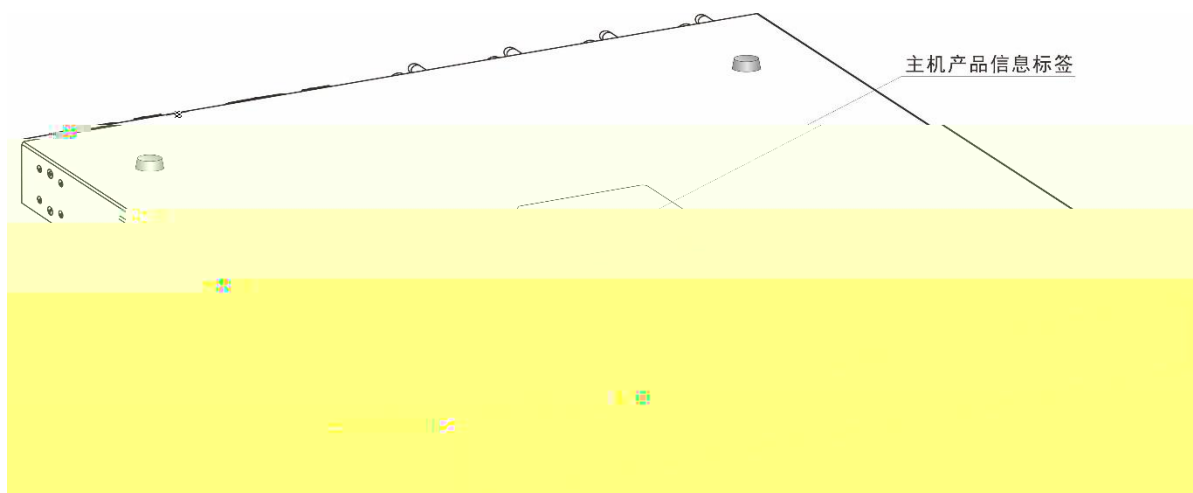


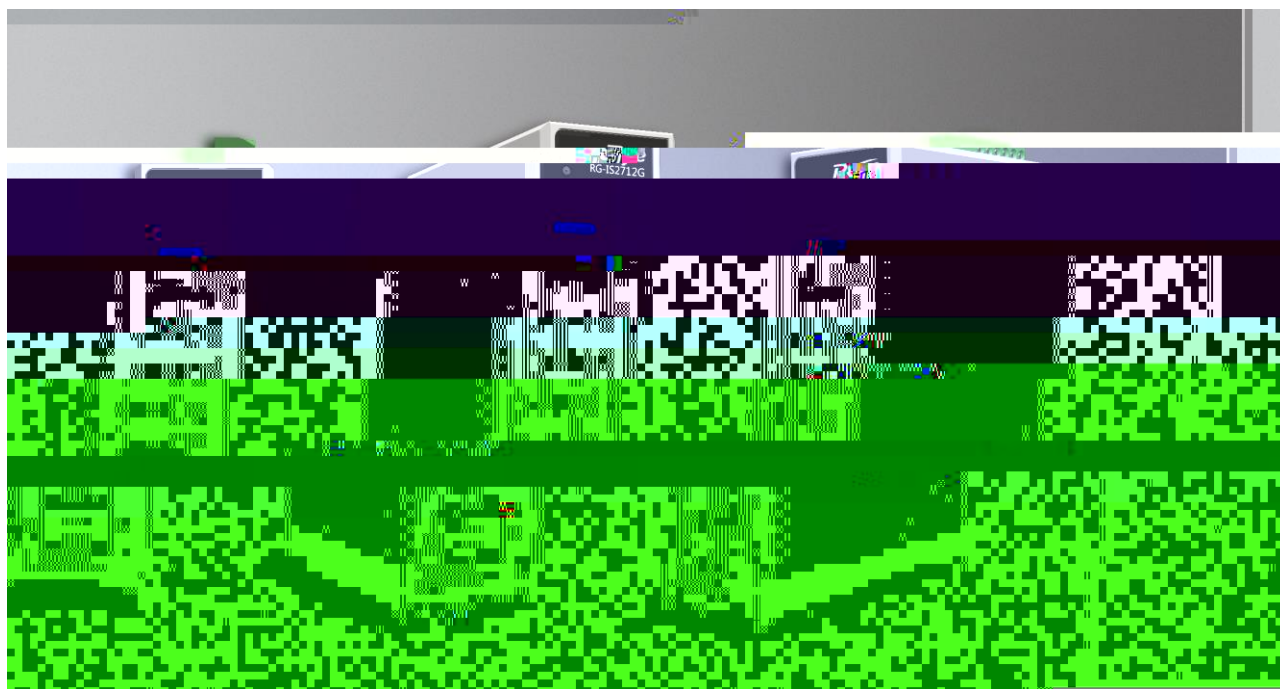

ω

1-2 RG-IS2712G

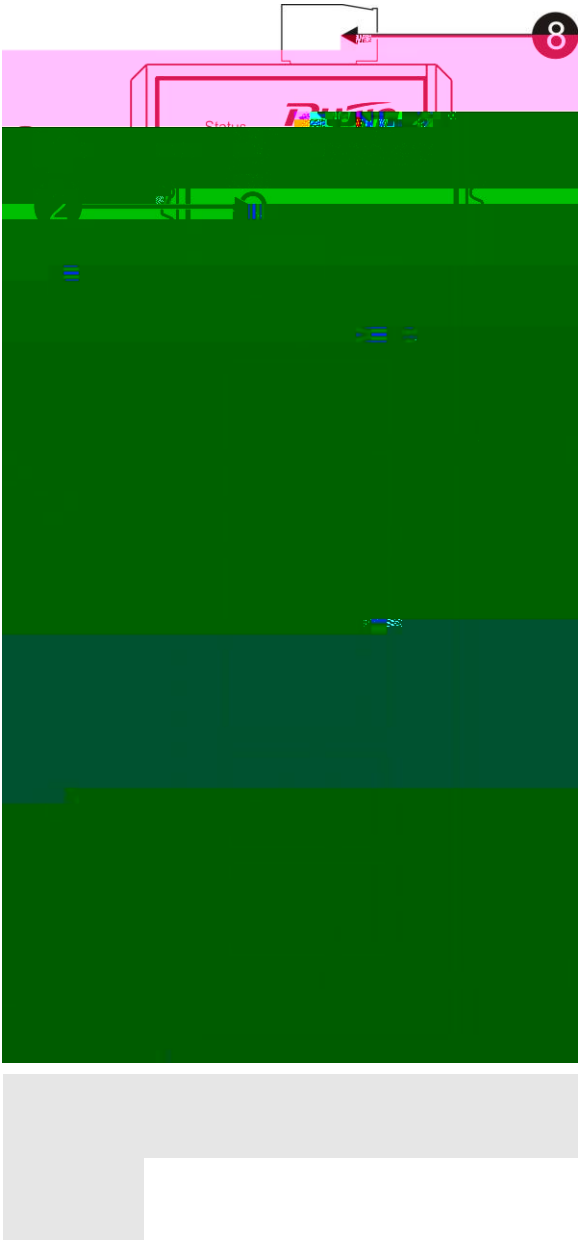

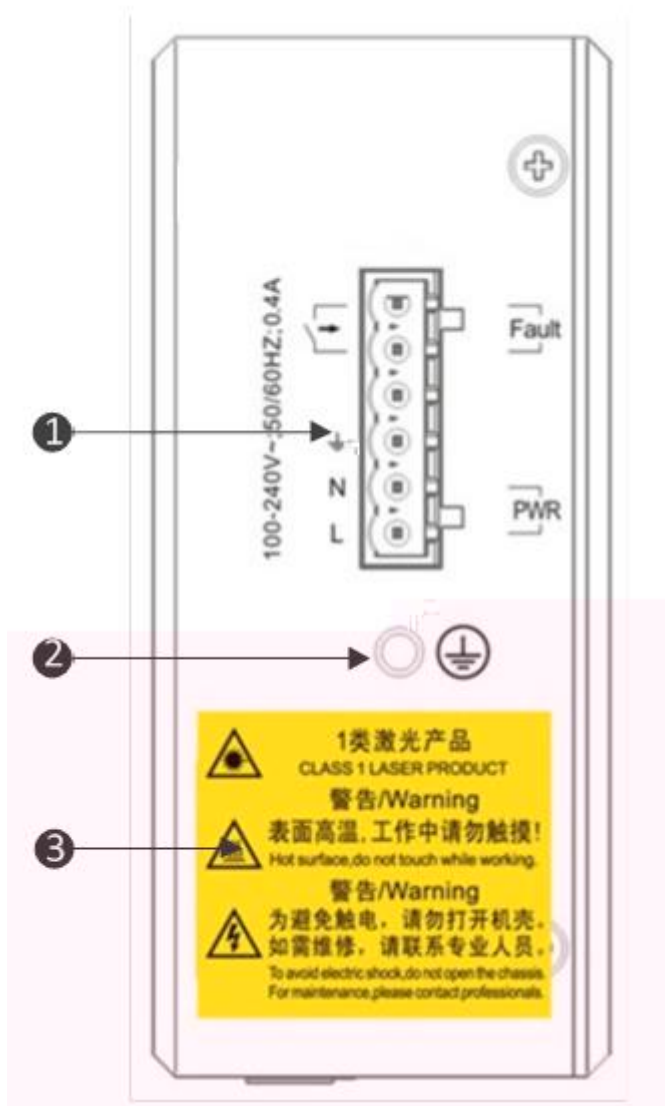

PWR

Fault

ω

85-265V~

50-60Hz

0.4A

10A

“A” “H”

RG-IS2712G

10cm

ĩ ^

	Status		
			5.2
RJ-45	1~8		Link
			Link up
SFP	9F 12F		Link
			Link Up

1.2 RG-IS2706G

— “A”



	1000Base-T Mini-GBIC-GT SFP 2.5G VSU GE-SFP-STACK1.6M
	BIDI GE-SFP-LX20-SM1310-BIDI GE-SFP-LX20-SM1550-BIDI BIDI B-3
SFP	1000Base-X 2.5G VSU
	AC 100-240V~ 85-265V~ 50-60Hz 0.4A 2.0mA HVDC 140-340VDC 130-370VDC 0.4A
	9W 1.5w
	-40°C ~ 85°C
	-40°C ~ 85°C
	10% ~ 90% RH
	10% ~ 90% RH
	1
	IP40
EMC	GB/T 9254.1
	GB 4943.1
× × mm	160 × 115×52
kg	1 kg



:

:

1.

2.


3.

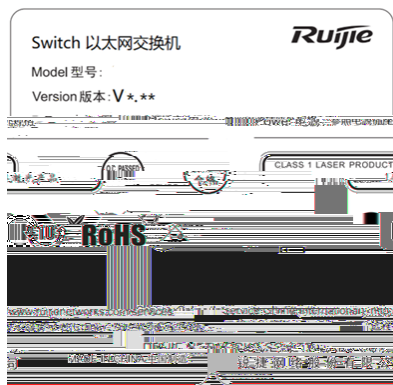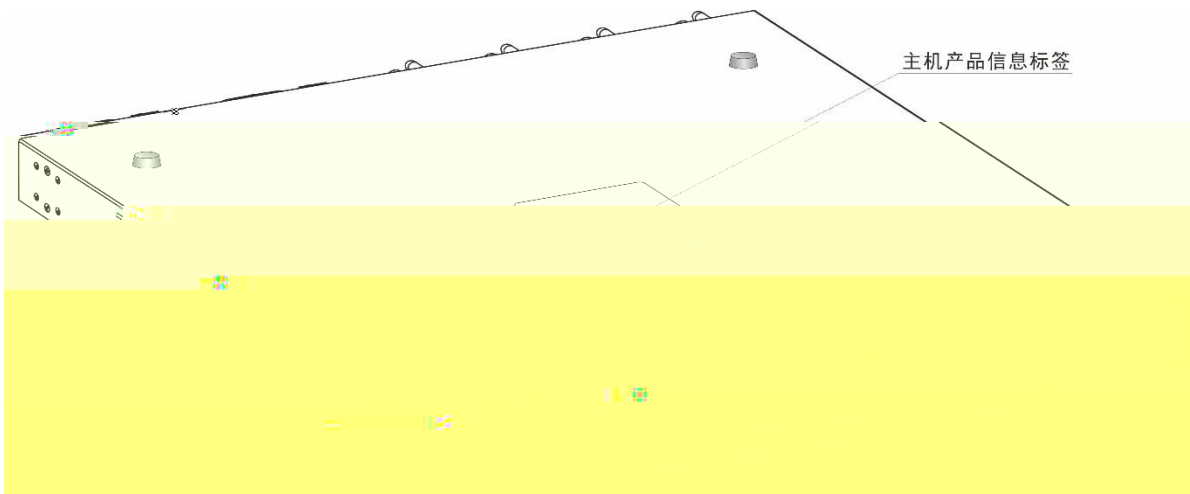

U


RG-IS2706G 4 10/100/1000Base-T 2 SFP 1 Console

1-4 RG-IS2706G

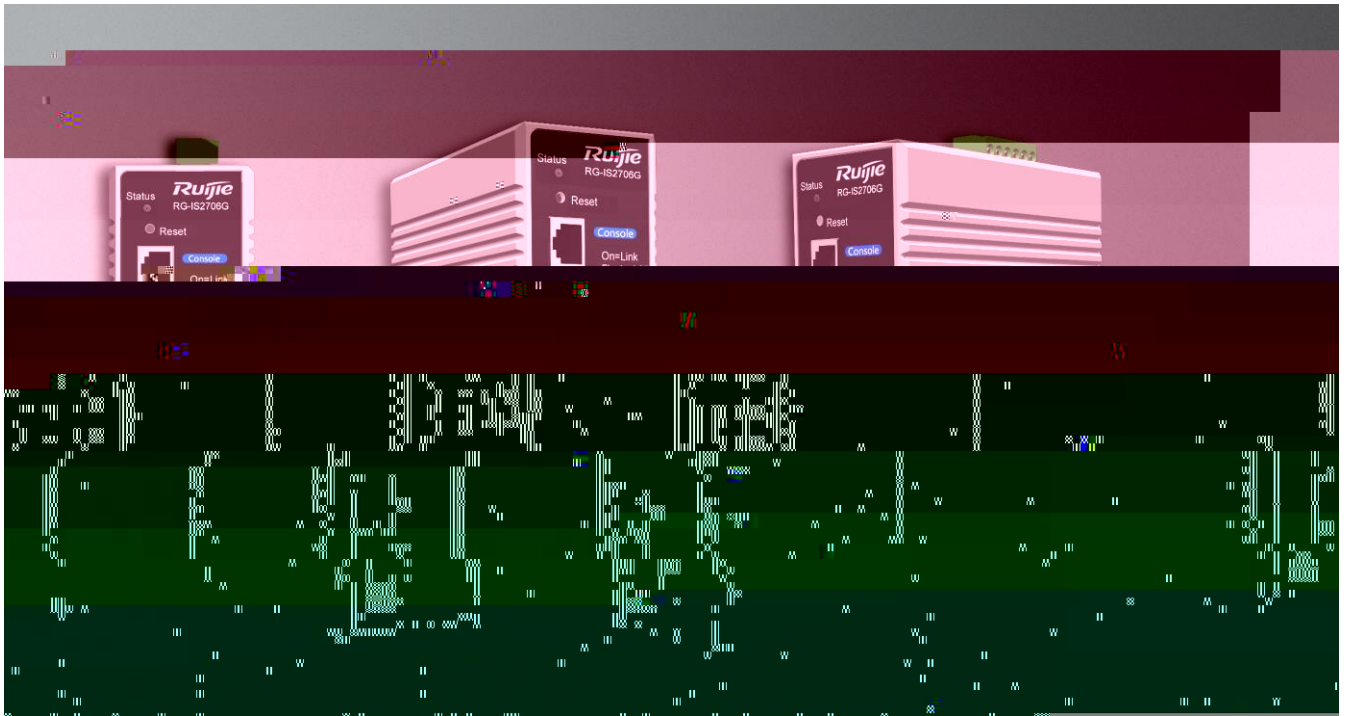

Ω

1-5 RG-IS2706G

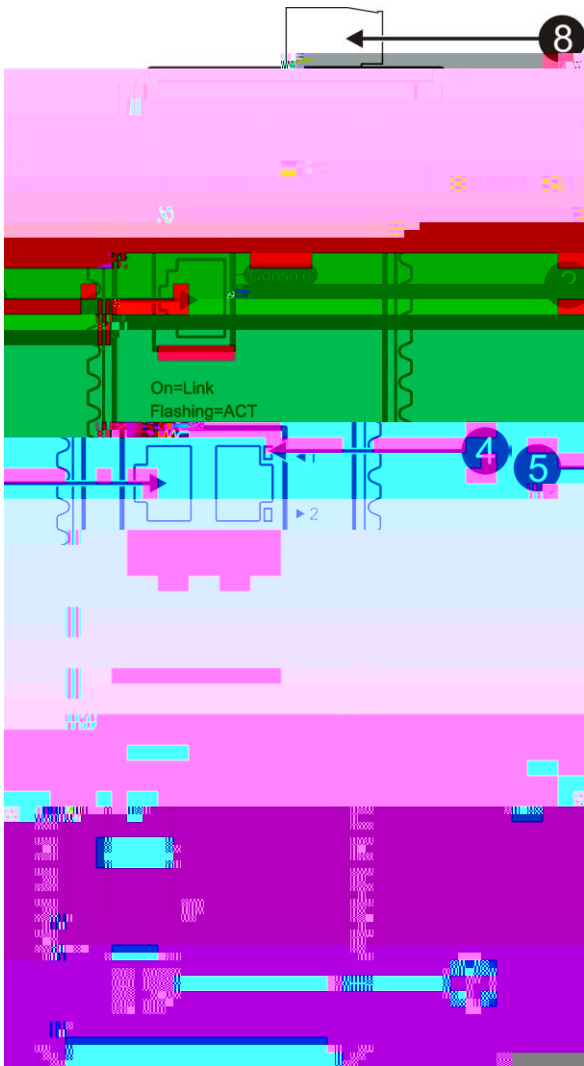


Reset
Console
10/100/1000Base-T

10/100/1000Base-T
1000Base-X SFP /2.5G
1000Base-X SFP

Ω


1-6 RG-IS2706G

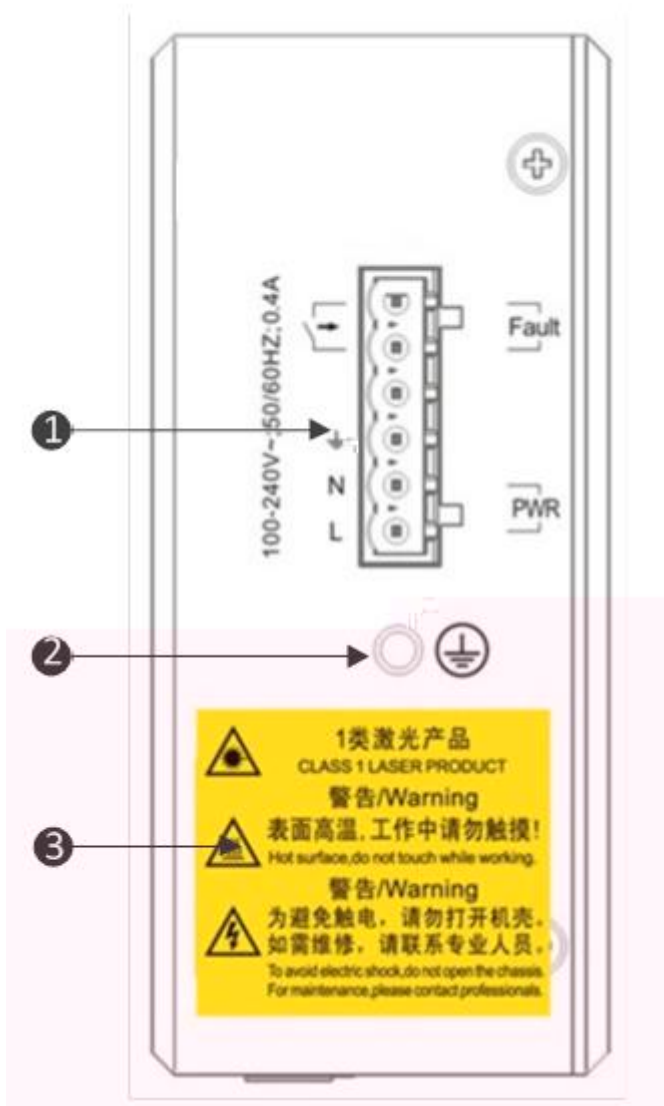

PWR

Fault

ω

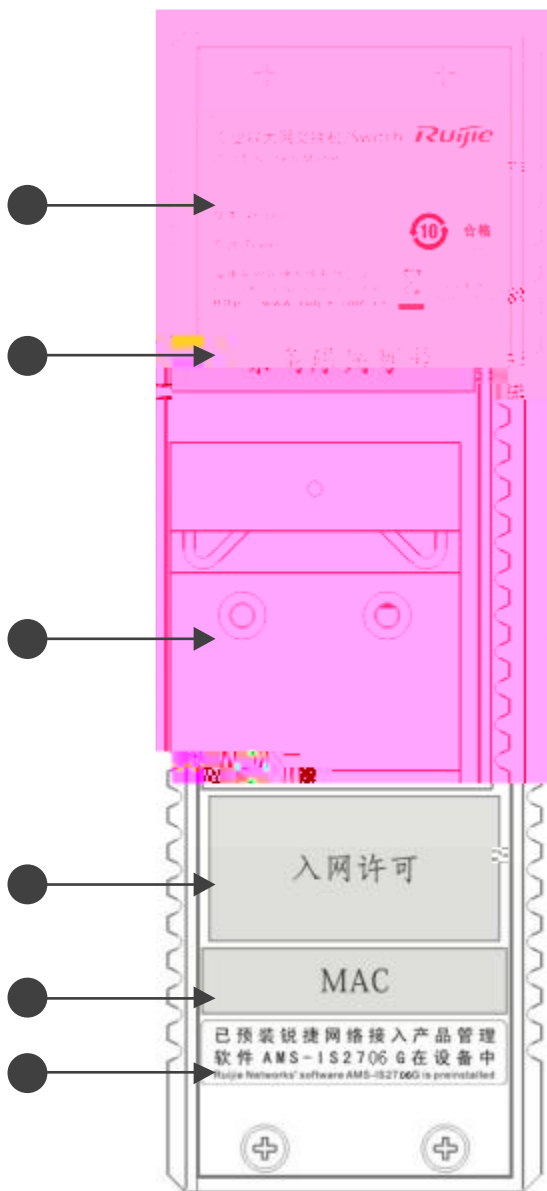

RS-2706G	MAC
DIN	

≈ 1 1

RG-IS2706G

AC

100-240V~

85-265V~

50-60Hz

0.4A

10A

$$\begin{matrix} \text{A} & \text{H} \\ \downarrow & \downarrow \end{matrix}$$

RG-IS2706G

10cm

21


	Status		
			5.2
RJ-45	1~4		Link
			Link Up
SFP	5F 6F		Link
			Link Up


1.3 RG-IS2712G -DC

$$- \tilde{A}_i$$

The diagram illustrates a network topology. A central switch, labeled 'Switch', is connected to two servers. The server on the left is labeled 'Server 1' and the server on the right is labeled 'Server 2'. The switch is connected to both servers via a '2.5G' link. The switch is also connected to a 'VSU' (Virtual Switching Unit) via a 'VSU' link. The switch is connected to a '00Base-T' network via a '00Base-T' link. The switch is connected to a 'ni-GBIC-GT' network via a 'ni-GBIC-GT' link. The switch is connected to a 'P' (Port) via a 'P' link.


	GE-SFP-STACK1.6M		
	BIDI	GE-SFP-LX20-SM1310-BIDI	
	GE-SFP-LX20-SM1550-BIDI	BIDI	B-3
SFP	1000Base-X		
	2.5G		

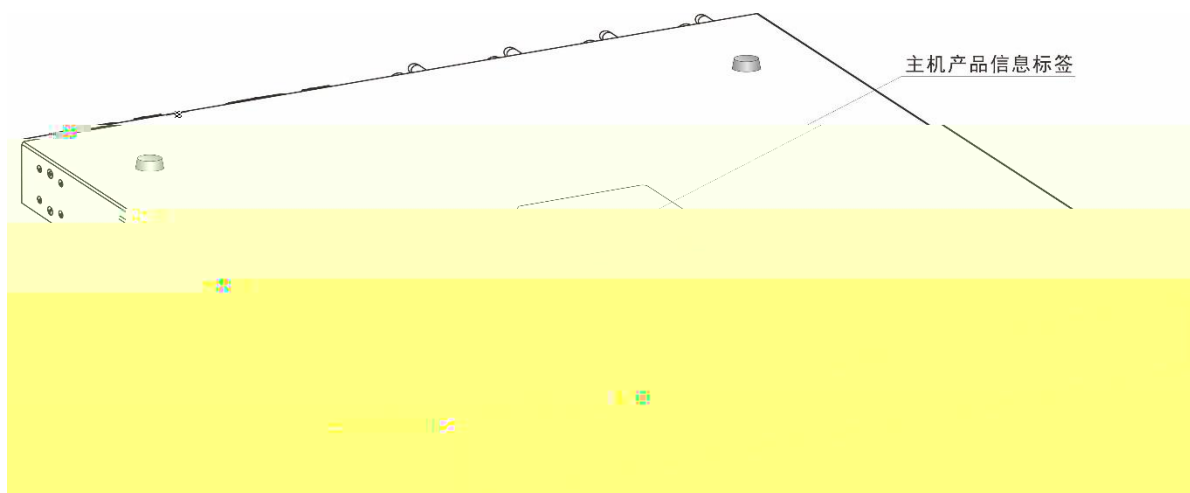

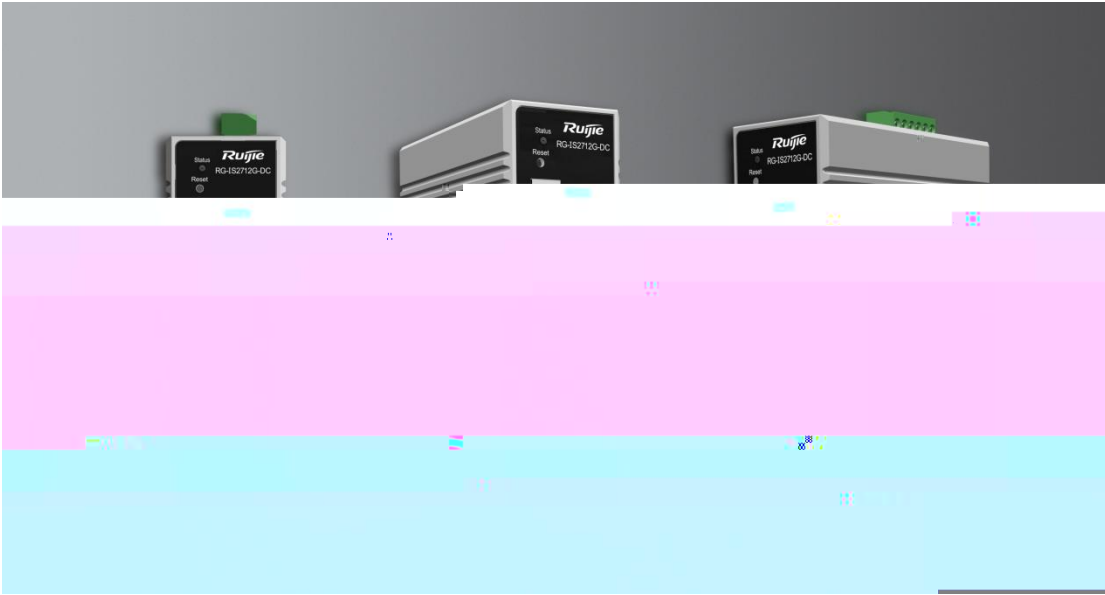

Ω


1-8 RG-IS2712G-DC

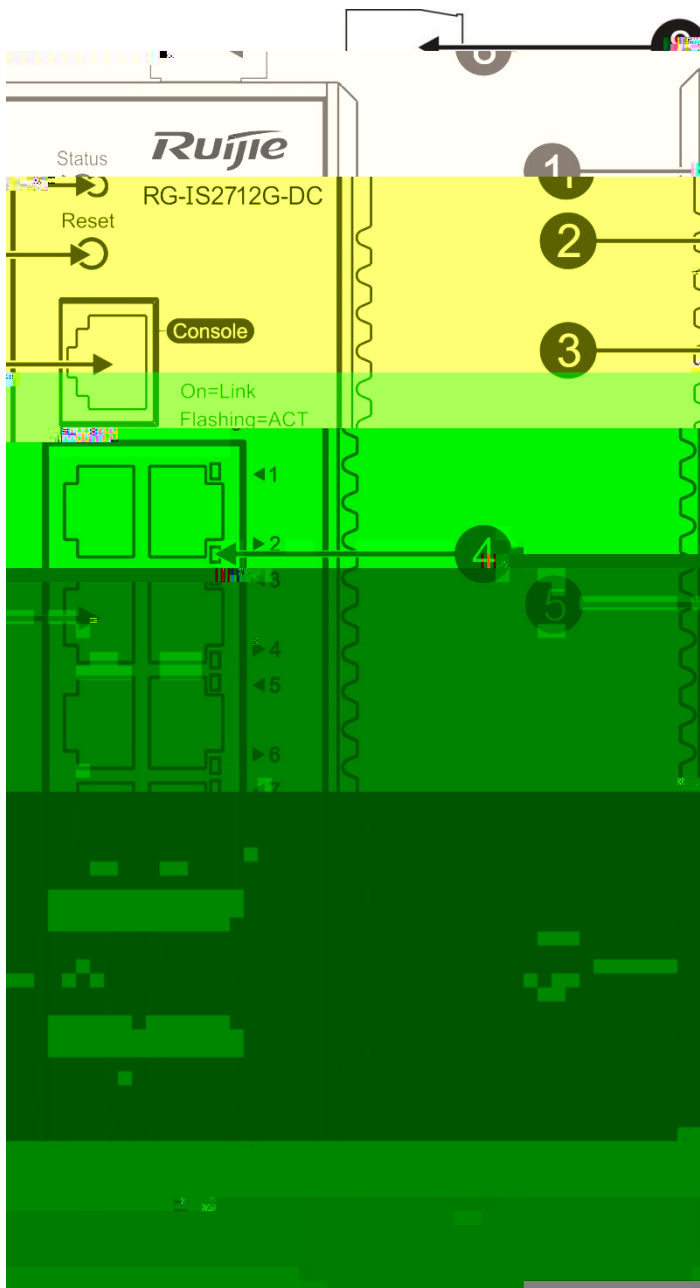

Reset	10/100/1000Base-T
Console	1000Base-X SFP /2.5G
10/100/1000Base-T	1000Base-X SFP

Ω


1-9 RG-IS2712G-DC

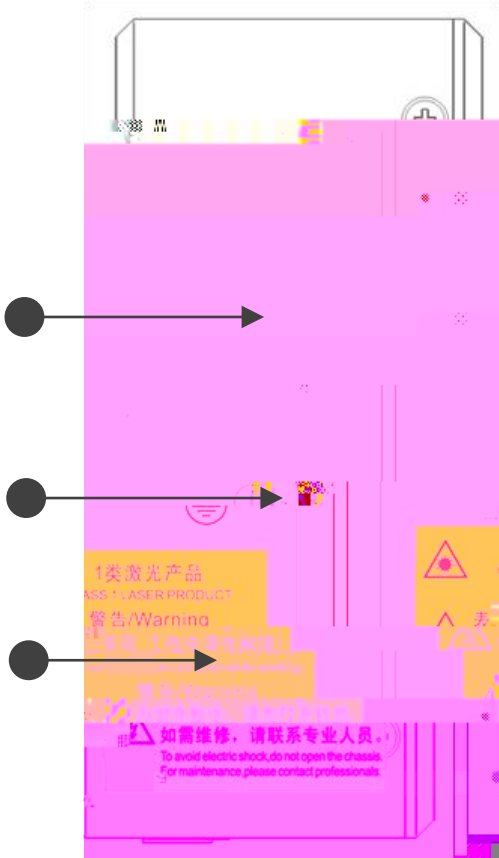

PWR

Fault

ω

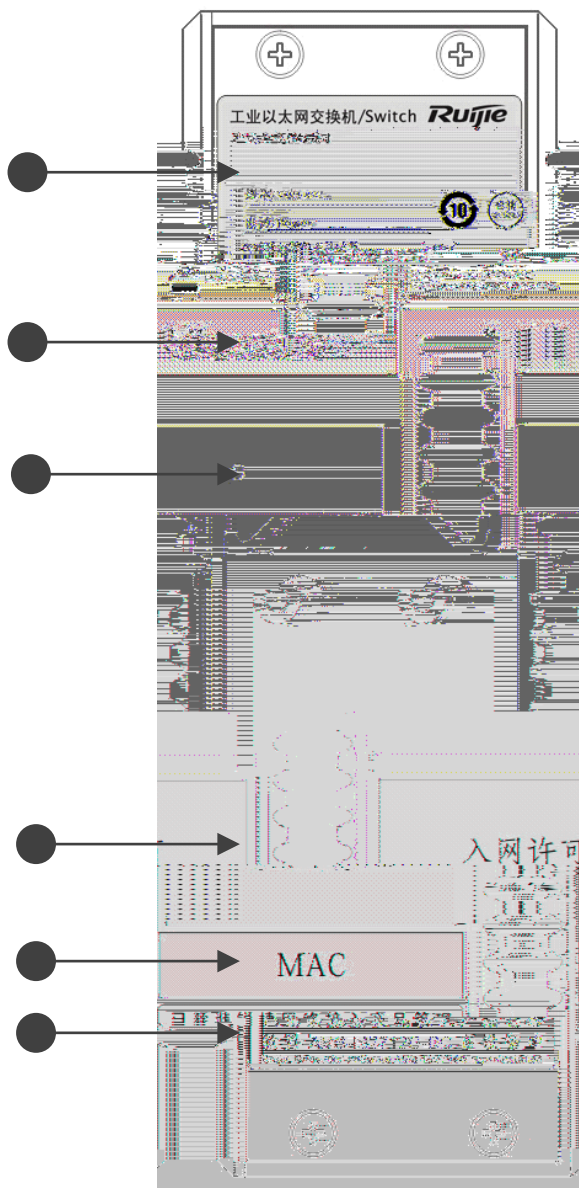

RS-2712G-DC

MAC

DIN

≡ || 1 1

RG-IS2712G-DC

DC

24VDC 48VDC

18-72VDC

1.0A

"A "H "

RG-IS2712G-DC

10cm

ĩ ^

	Status		
			5.2
RJ-45	1~8		Link
			Link up
SFP	9F 12F		Link
			Link Up

2.1.6 Ė ģ

/



18

24

2.2 ģ ģ ģ ģ

RG-IS2700G

2.2.1 ģ

RG-IS2700G 10cm

2.2.2 ģ ģ ģ ģ

RG-IS2700G

-40°C ~ 85°C	10%-90%(ģ)
--------------	--------------

1.5m

0.4m

2.2.3 Δ ģ ģ

$\geq 0.5 \mu\text{m}$	/ m ³	$\leq 3.5 \times 10^6$
$\geq 5 \mu\text{m}$	/ m ³	$\leq 3 \times 10^4$

	(mg/m ³)	(mg/m ³)
SO ₂	0.3	1.0
H ₂ S	0.1	0.5
NO ₂	0.5	1.0
Cl ₂	0.1	0.3

30

2.2.4 "AW á P

RG-IS2700G

σ

λ


γ

2.2.8 ¼ Ü

RG-IS2700G

3 u f

3.1 f ∫

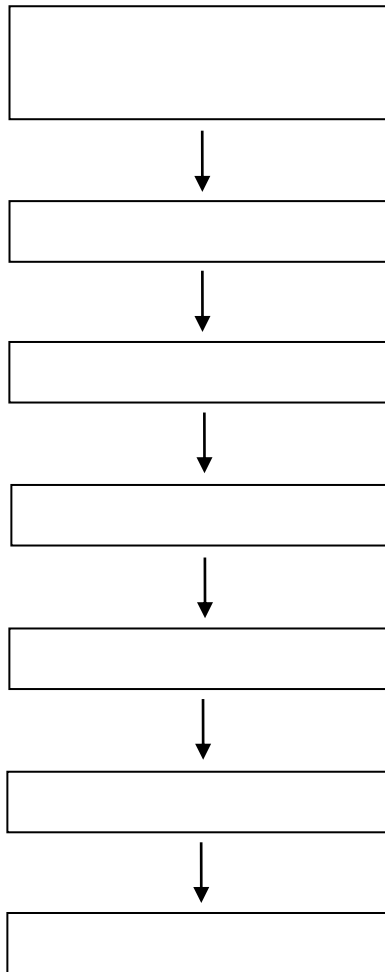

3.2 f ~

3.3 í RG-IS2700G  'O 

† ð


:


10

3.3.1  'O  í § 

1)

2) DIN

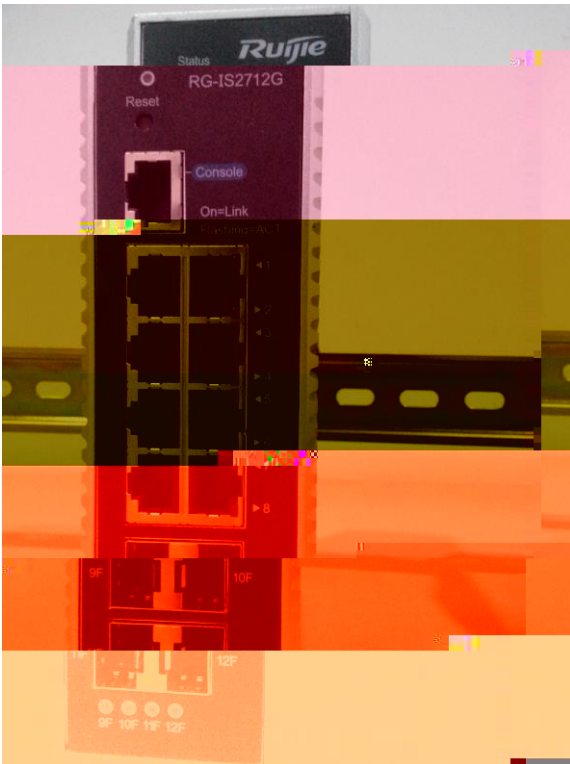


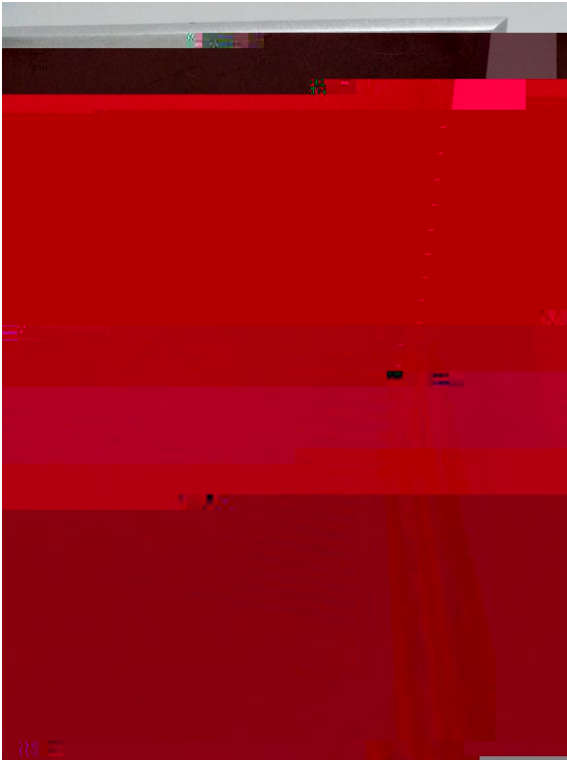


3.3.2 m ≈ || v ↓ H ≈ || ü

1. RG-IS2706G RG-IS2712G


1) 3 6 1 PE 2 N
3 L

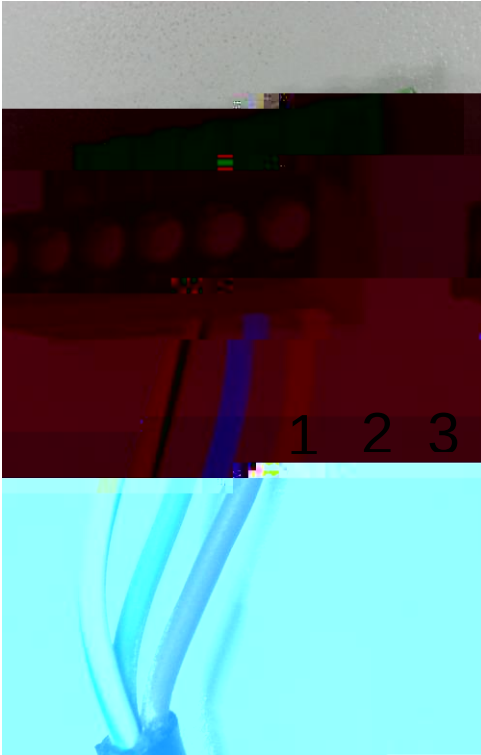

2)

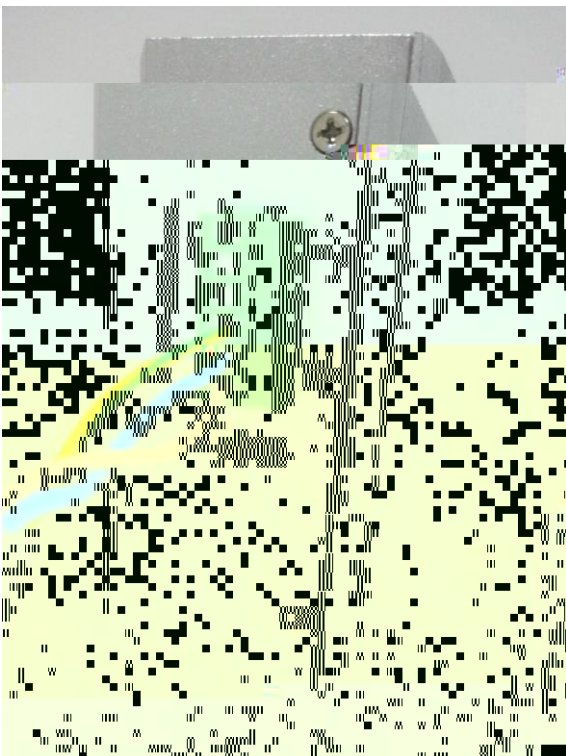

3-2

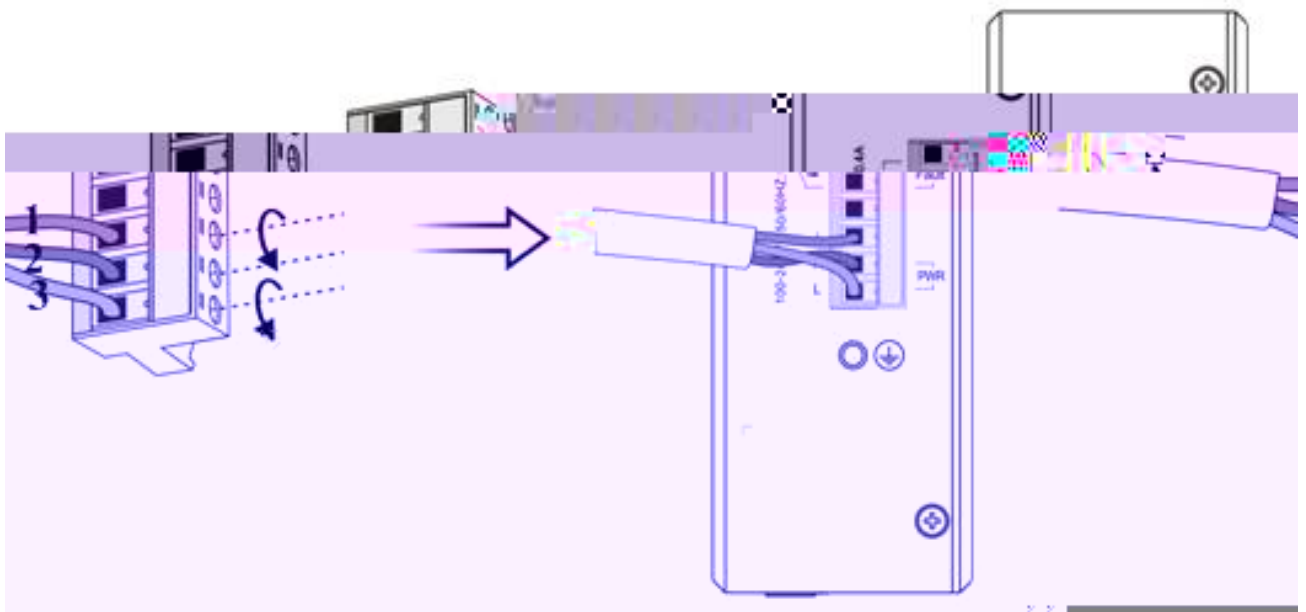

2. RG-IS2712G-DC

1) RG-IS2712G-DC



6

PWR1 PWR2

V1+/V2+

2

V1-/V2-

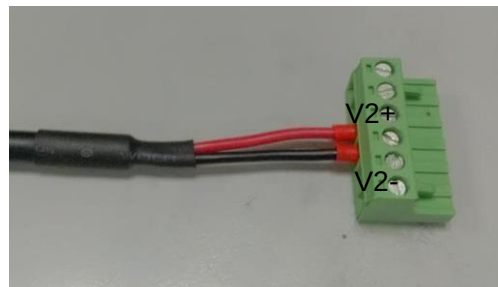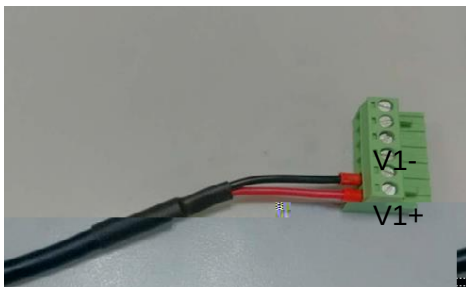

2)

RG-IS2712G-DC

220V


4 1 1

4.1 2 Å 1 J

1 J 2 Å

PC Console

4-1

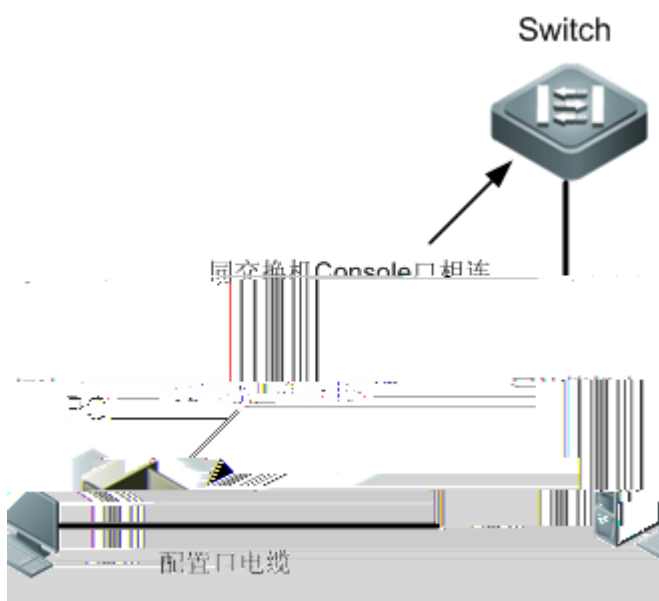

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

DB-9

PC

RJ-45

Console

1 1~ 2 Å

PC

PC

Windows3.1

Terminal

Windows 95/98/NT/2000/XP



9600

8

1

1) " " " " " " " " " " " "

4-2

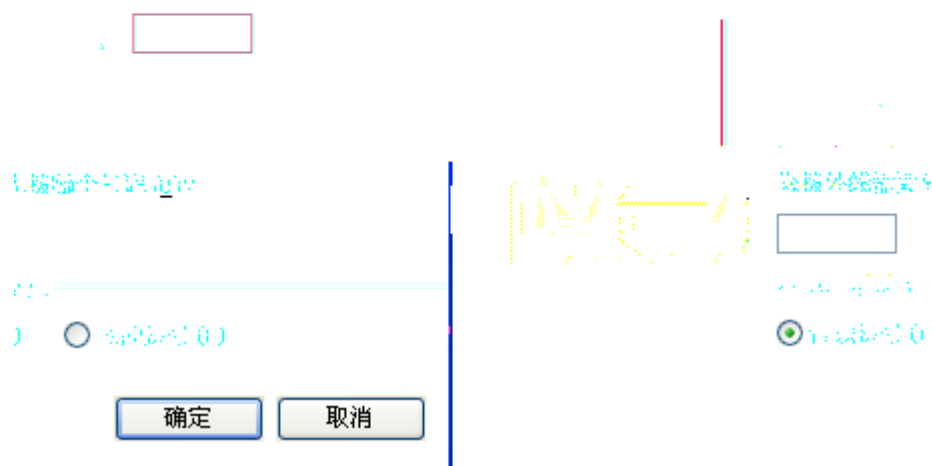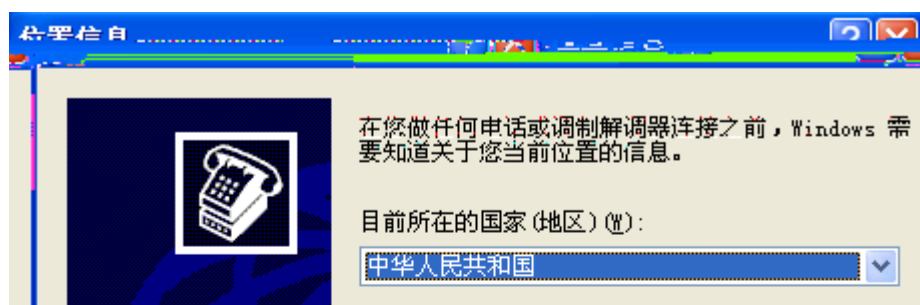

2) “ ”


4-3



3) < >

4-4



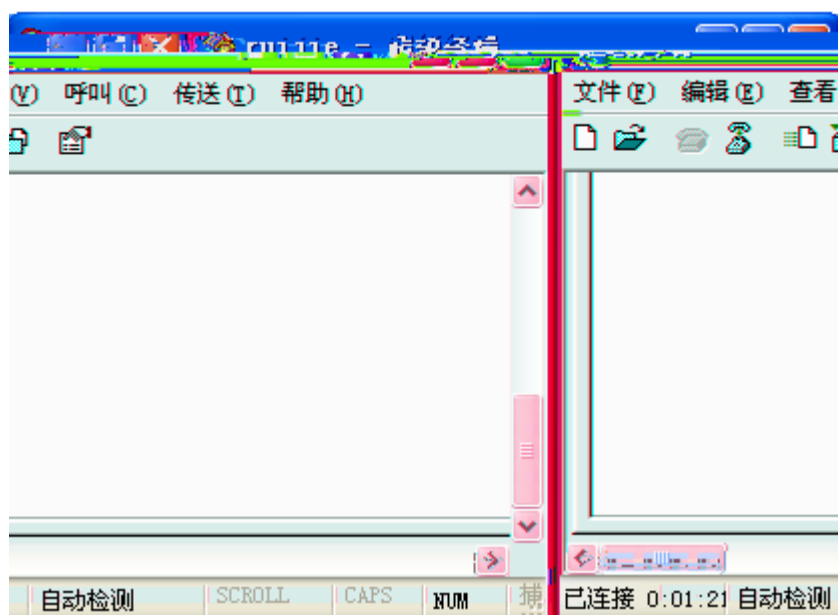

4.2

≈ 0.5

PC

≈ 0.5 0.5

E A

Switch	Switch	Switch	Switch
1 IRD +	1 OTD +	1 IRD +	OTD +
2 IRD -	2 OTD -	2 IRD -	OTD -

Table B Mini-GBIC 4 4 4 4

SFP SFP Mini-GBIC SFP

Mini-GBIC SFP 4 4 4 4

B- 1 SFP

Mini-GBIC(SFP)	(nm)		
----------------	------	--	--

B-2 SFP

				AWG	Gb/s	DDM Yes/No
GE-SFP-STACK1.6M		SFP	1.6	28	2.5G	No

ESD

ñ V ñ v d b !

B-3 SFP BIDI

/	
/20km	GE-SFP-LX20-SM1310-BIDI GE-SFP-LX20-SM1550-BIDI 5
/40km	GE-SFP-