



WEB

RG-RSR10-01G-E

RGOS 10.4(3b13)p1

V1.0

RGOS 10.4 (3b13)p1

Ю

<http://www.ruijie.com.cn/> Å

<http://webchat.ruijie.com.cn>Å

<http://www.ruijie.com.cn/service.aspx> Å

7 × 24

⌚ 4008-111-000

<http://support.ruijie.com.cn>

6 /1 service@ruijie.com.cn

“					
	л	т	Ә	ä	ä
			Å		
			è		Å
з	Å	з	Å	з	ä
					é

1) з

з Ю

з ^ з а ї ~ т Å

з ^ з з ї ~

1

X^c J : SF " J № 45;3-4357 ã
J ã 4773-<33 % ZHE T c I í , K j j ^ V
ã

λ $i /$ ZHE n i f̃ η JH323 LS № 4<5|49;14|4 $\lambda \phi$

№ 588!588!588!3 ZHE η № x dg plq № x dg plq i Q λ $\lambda \lambda H$ λ τ ℓ εQ


Z l q g r z v [S № ζ x

1 1	1
ZHE n	
ZHE 1	JH323 Y0DQ4 1 LS X 4<5149 ;1414
ZHE 1	x dg p lq x dg p lq ψ x j x h v w x j x h v w

RSR10-01G-E				RSR10-01G-E				VLAN 1			
ℓ	χ	↵ SF	ι	↵ ι	↵ SF ↵ J Ъ	JH323	↵	ǎ ι	↵		
		Q ° A °	↵	Ǔ	↵ ι Ĩ ↵ ι	↵ SF ↵ J, ⅈ					
ℓ	χ	↵ SF LS	ℓ	ĩ χ							
	ⅈ SF	ĩ Ĩ ° p	ǐ 0> p ĩ	— ǐ 0> p ↵ ⅈ	Lqwhuqhw	ǐ 0>% ↵ ⅈ	ǐ	χ			

The screenshot shows the 'Network Connections' window in Windows XP. The 'Local Area Connection' icon is highlighted, showing a green checkmark and a globe, indicating it is connected to the Internet. The window title is 'LAN 或高速 Internet'.

405

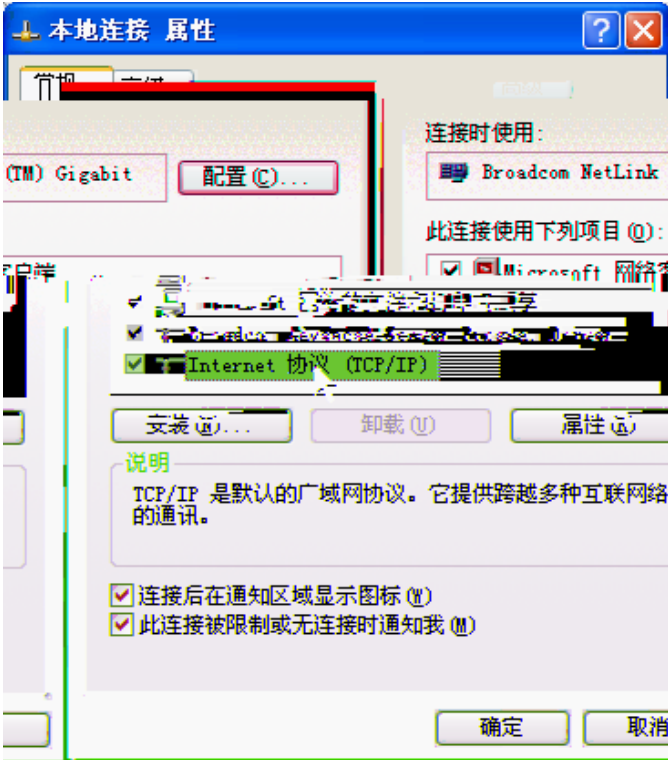

406



LS 4<5149;1414 % 1 SF LS 4/ 0 b ă J

PC

46 SF i i 0 b0>0 b0> ofpgb0>% b
 7 slqj 7 x slqj 4<5149;1414 x
 407 ă I

Pinging 192.168.1.1 with 32 bytes of data:

Reply from 192.168.1.1: bytes=32 time<1ms TTL=64
Reply from 192.168.1.1: bytes=32 time<1ms TTL=64
Reply from 192.168.1.1: bytes=32 time<1ms TTL=64
Reply from 192.168.1.1: bytes=32 time<1ms TTL=64

Ping statistics for 192.168.1.1:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms

408


```
Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.1.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

⚡ 100% 100% 100% 100%

⚡ 100% 100% 100% 100%

⚡ 100% 100% 100% 100%

⚡ 100% 100% 100% 100%

1.2.3 WEB

ZHE 100% 100% 100% 100% ZHE 100% 100% 100% 100% 100% 100%


4, 100% 100% 100% 100% 100% 100% 100% 100% 100% 100%

5, 100% 100% 100% 100% 100% 100% 100% 100% 100% 100%

6, 100% 100% 100% 100% 100% 100% 100% 100% 100% 100%

LH

k æ< U TT”p






"O p LS b o J J LS J N ó o I "O p U LS b o GKFS
 "O o I "O p SSSrH+DGV0, b o Q DGV0 Z o I

J ž x VLF v 6J J x i v U 6J J N Q a l J FH4 J J N J
 J J Q H y H i J H p J b y J J è Z J J V
 U Q i ψ ā ε I ` ζ ` a , x Z J ā j a v J

FH4 J J:FH4 J' H4 FH4 y i T H4 "O H4 ō
 J ā a ā a l J N 5P> "O FH4 I Q ъ s J %
 J ō J ā a l 5X -97Nelwhv a l 'Y J LS SSS B
 LS y n LS

4044

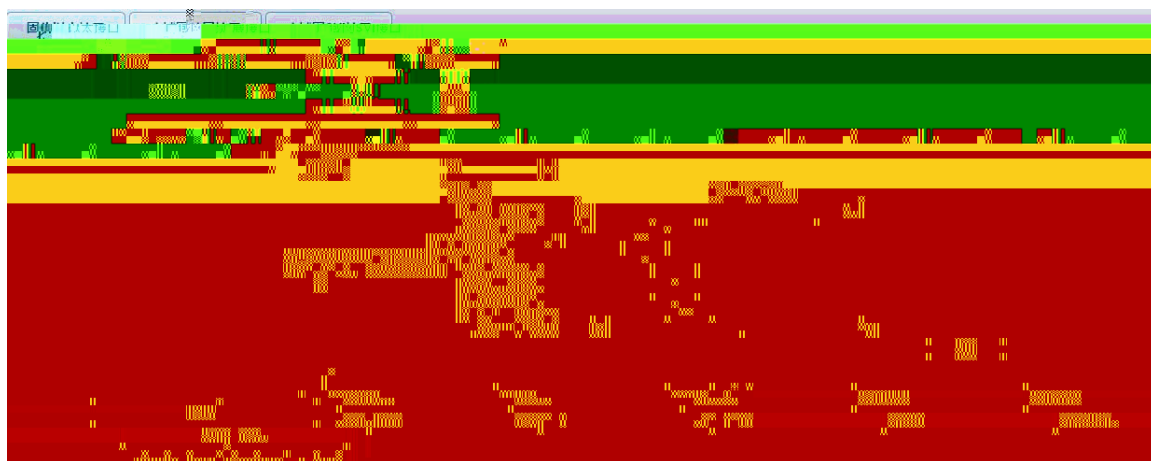

a l ā I Q a ` o v b a l J

4045

同步接口配置

接口名称:

Serial 4/0:0

获取IP方式:

协商 (PPP)

IP地址:

*(例如: 192.168.0.1)

子网掩码:

*(例如: 255.255.255.0)

链路封装协议:

HDLC

保活时间间隔:

10


*(范围: 1-32767)

完成

取消

a l j j=a l i j 'Y j LS SSS B LS T t ' 𐄂 GWH ε j 𐄂 ζ
GFHε ζ 𐄂 i GWH ' % j
T ψ 𐄂 GFH ' T

4046

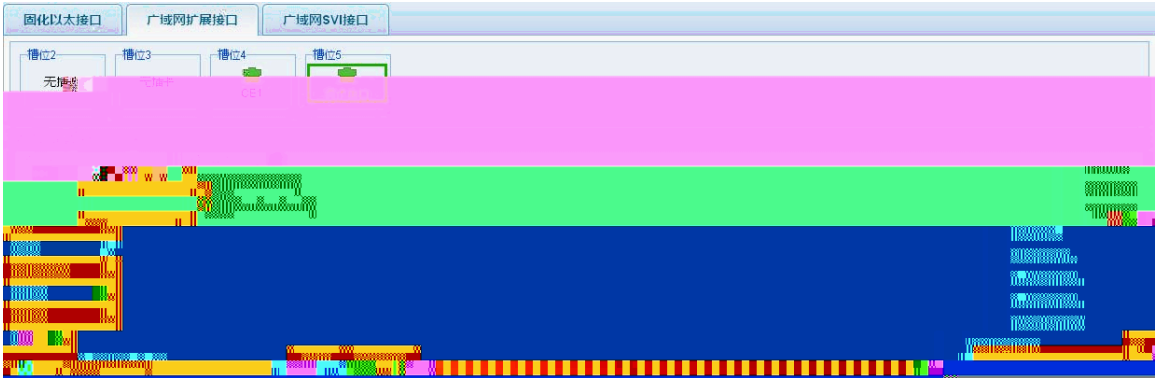

SSS B χ Srlqw0wr0Srlqw Surwrfœ B ζ 𐄂 a 𐄂 B j SSS
Z B 𐄂 τ i 𐄂 𐄂 LS' 𐄂 𐄂 Z
Q θ j i SSS 𐄂 𐄂 SSSrH

VLF06J j j=6J j i j 6J j s u j
' 𐄂 Z b o 'ON 𐄂 j 𐄂 i o 𐄂 j 6J j "ON 𐄂 s u
"ON "ON s u "ON è j 𐄂 6J j s u "ON i j ψ "ON 𐄂 i 𐄂 "ON
𐄂 "ON 𐄂 6J τ 𐄂 𐄂 6J


4047



0 1 5 0 3

b o b

j

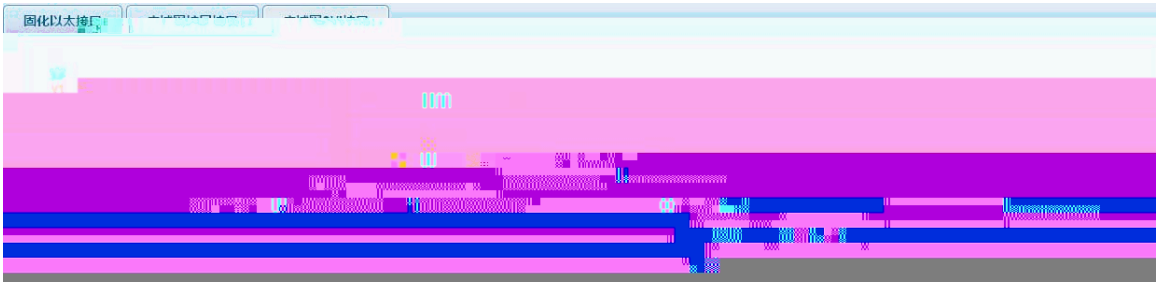


"O p LS b o J J LS J N ó o I "O p U LS b o GKFS
"O o I "O p SSSrH+DGV0, b o Q DGV0 Z o I

RSR10-01G-E	3G	SVI
VYL	J	VYL 5 U
VYL	Z Y0DQ ð ð	J Y0DQ J VYL Q j è
J VYL	Y0DQ LG	í 4; VYL j

1.3.2.2

Y0DQ LG	i í	Wuxqn	SF
Dffhw			
WUXQN	X	Y0DQ	i ð Y0DQ % i í
j	Y0DQ	J	Y0DQ
DFFHW	X í	Y0DQ % í	Y0DQ 1 SF
a	Y0DQ	Y0DQ I Q	J J VYL


4049

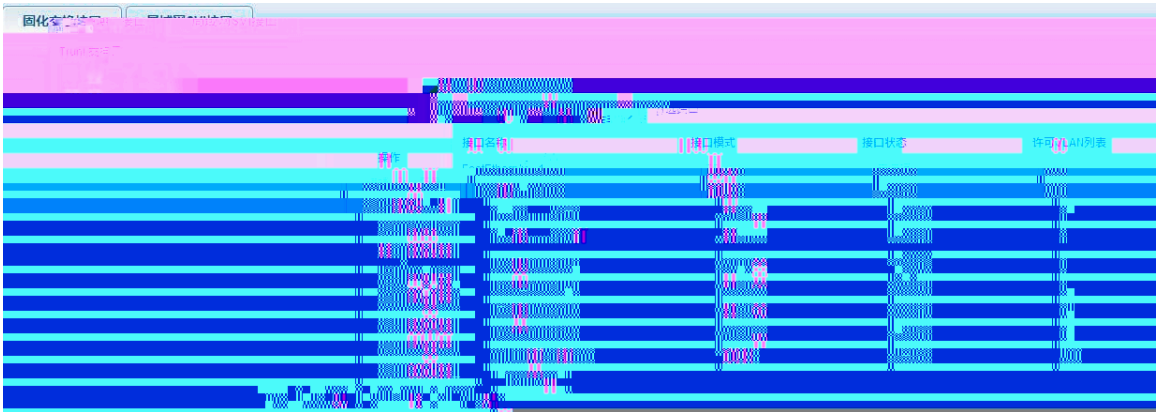


J Wuxqn z' ψ ð o I V Dffhw W`
ð z' o I W a p J b p J b p J b V I í

Y0DQ o ' % j ψ ō ʘ ĩ ž

404: Dffhw

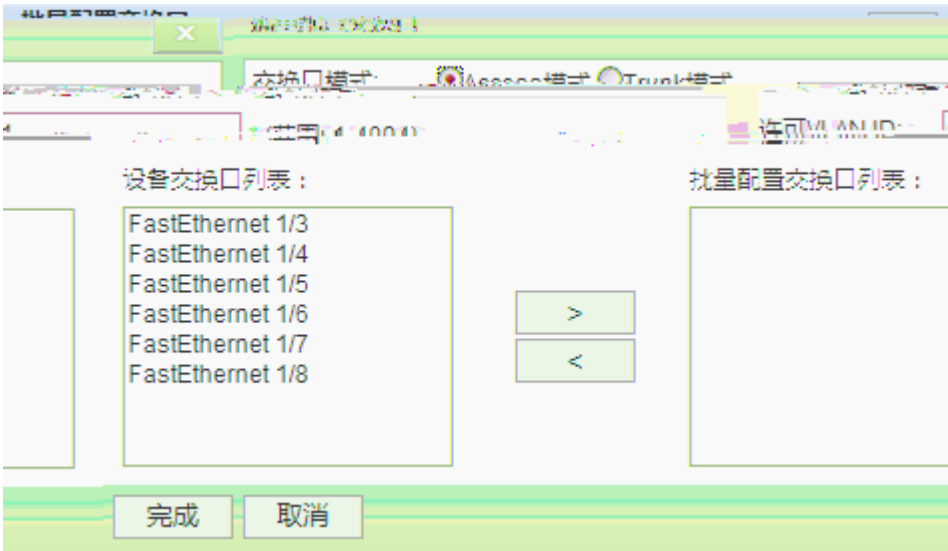



404; Wuxqn

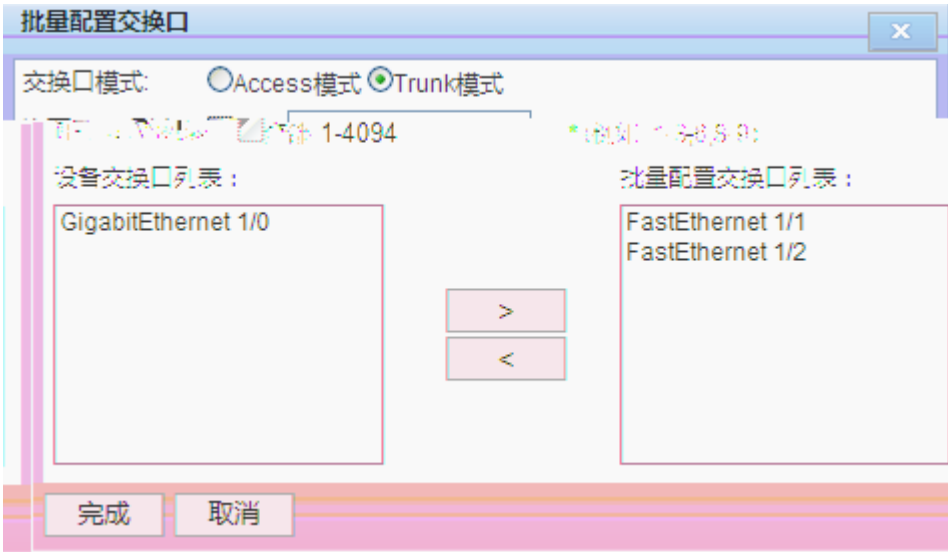

⚡	ʘ Dffhw	κ Dffhw	ǎ Wuxqn	j	κ
⚡	ʘ Wuxqn	κ Wuxqn	ǎ Dffhw	j	κ

χ Y0DQ ʘ b Y0DQ o ' ʘ Y0DQ ʘ Y0DQ

404<

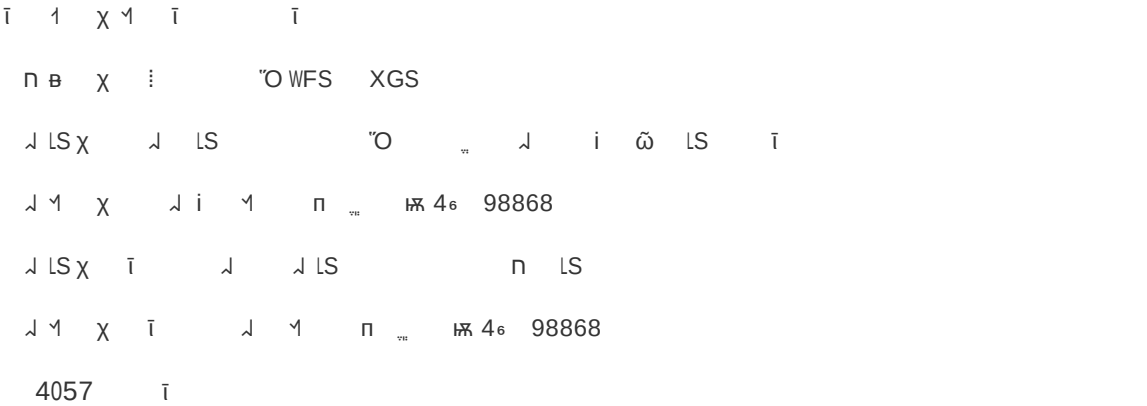

0 2 1 B ε G | q d p l f K r v w F r q i l j x u d w l r q S u r w r f r o / G K F S ζ 1 1 N B G K F S n 1 1
 2 0 L S ' 1 1 1 2 1 1 χ G K F S 1 0 ' L S } 1 n 1 0 1




1.3.3

1.3.3.1

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31

4063

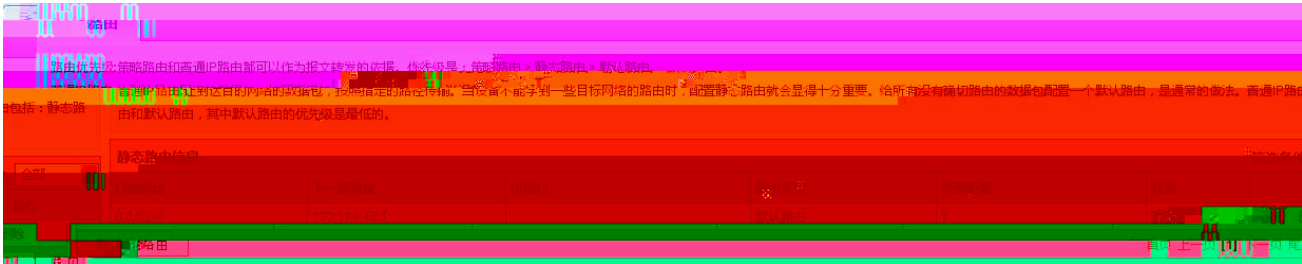

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31

4064

新建路由

×

说明: 管理距离-N : N值越小越优先进行选路

路由类型:

☒ 默认路由

☐ 静态路由

目的地址:

0.0.0.0

*

(例如: 202.210.10.0)

目的掩码:

0.0.0.0

*

(例如: 255.255.255.0)

出接口:

请选择

▼

下一跳地址:

*

(例如: 192.168.1.1)

管理距离:

1-255

*

(例如: 1-255)

完成

取消

1.3.3.2

ε SEU x Srolf | 0Edvhg Ur xwlqj ζ
! @ : | S i v
j a j a √ √ M
"O √ √ √ √
"O

新建策略路由

策略应用接口:Serial 4/0:1

策略优先级:

*(0-65535, 数字越小优先级越高)

出接口:请选择

下一跳地址:

*(例如: 192.168.50.1)

匹配策略

任意源IP

源地址:

*(例如: 192.168.1.0)

子网掩码:

*(例如: 255.255.255.0)

任意目的IP

目的地址:

*(例如: 192.168.1.0)

子网掩码:

*(例如: 255.255.255.0)

完成

取消

1.3.3.3 RIP

ULS+UrxwLqj lqirupdwlrq Surwrfro, Z " J B +Lqwhulru Jdwhzd| Surwrfro/V YLJS, E
+glwdqfh0yhfwru, B ULS XGS i i
J J 48 % a 1 J N J Z
Q H - H
Z HE Z K ULSy5 ULS B i J N J N W ULS % Z HE
J Q i J N K ULS i J N J J LS W i
ULS B

J LS W J ULS

RIP

U X. ULS Y
X ULS Y Y W J
Y Y W J

4067

22

启动RIP

配置RIP

路由引入

路由汇聚信息

关闭/开启RIP

RIP进程：

关闭

开启

应用

RIP

 χ Q θ a ℓ ε 9 ζ à ℓ Y0DQ

ULS χ π κ ULS ∟ ∕

 ĩ χ

฿ ĩ χ ฿ ! Q Õ j ĩ

4068

启动RIP

配置RIP

路由引入

路由汇聚信息

路由引入

在 个路由协议中通告从该协议学习到的路由。新路由包括直连网络、静态路由或动态路由中引入的路由。

路由引入

 ∟ ∕ ∟ ∕ - τ = ULS ∟ ∕ ∟ RVSI ∟ ∕ ∟ ∕

∟ RVSI ∟ ∕ ULS i RVSI

1 χ 9 rvs i f r q q h f w h g v w d w l f

1 χ 1

4069

启动RIP

配置RIP

路由引入

路由汇聚信息

路由引入

在 个路由协议中通告从该协议学习到的路由。新路由包括直连网络、静态路由或动态路由中引入的路由。

路由引入

406:



RVSI B J N ' T J N W LB RVSI % ZHE J Q

I J N K RVSI T ' J J LS W I W

RVSI B




406 ;



24

ת א נ ח א א ת

406<

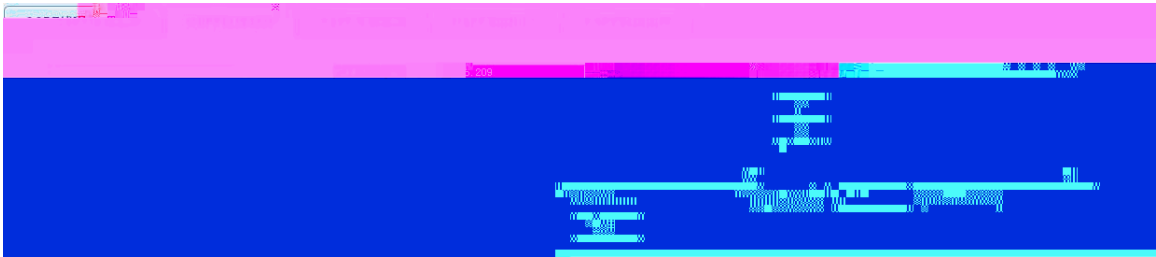

OSPF

4075



YSQ 5 4 p Yluwxdo Sulydwh Qhwz run b o o нь 1 1 б j è ã
, 1 1 1 YSQ 1 0 1 нь
j w !

YSGQ 1 3 0 ЛЬ 1 YSGQ П В 1 YSGQ 1 'Y 05WS В

4076



VPDN

VPDN

YSQ

IPSec VPN

DUS 43 ` χ    DUS ĩ    DUS 43    ` b ' Q DUS 43 DUS ĩ j

GrV ` χ GrV GrV2GGrV LS % I ĩ τ

H ` χ V\Q lorr g V


4 χ ĩ

ZHE 4 χ ZHE n 4 ;3 ZHE n 4 ' Q : ZHE 4 4 4

3 o DUS LS0PDF 4 4 LS 3 PDF I 4 LS0PDF 4

' Q T 4 C' Q DUS s U 4 I 4 4 LS0PDF 4 4 j ĩ


Ä LS0PDF 4 ō Ä ĩ I

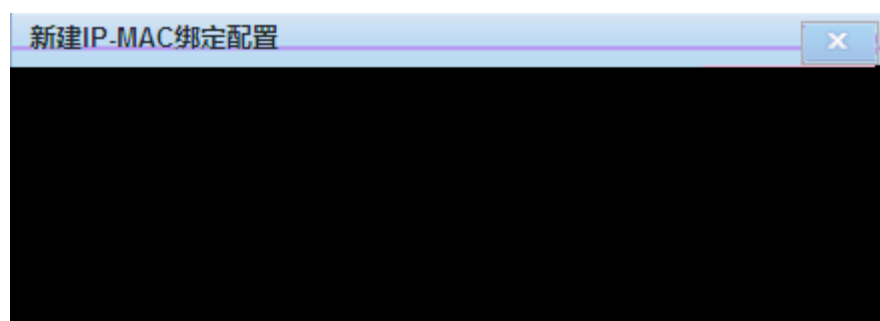


LS0PDF DUS J Y J LS0PDF J ψ U J

LS0PDF J b IQ U LS0PDF J 8


407;

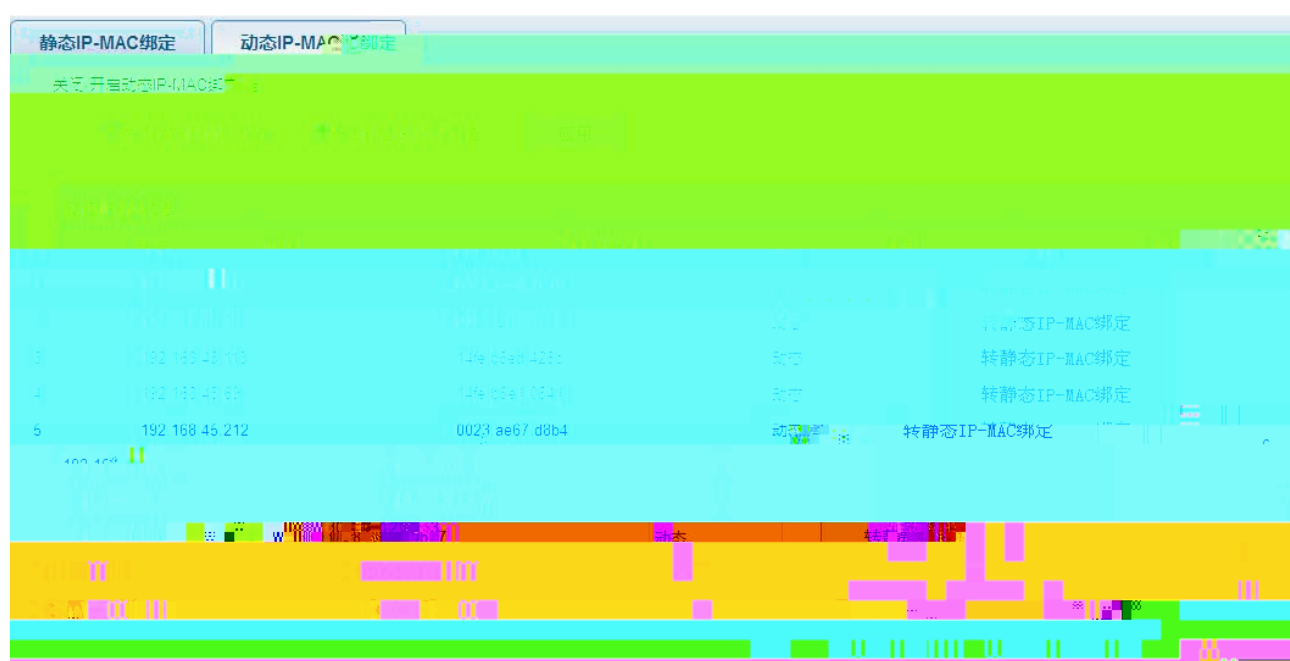

1.3.5.3

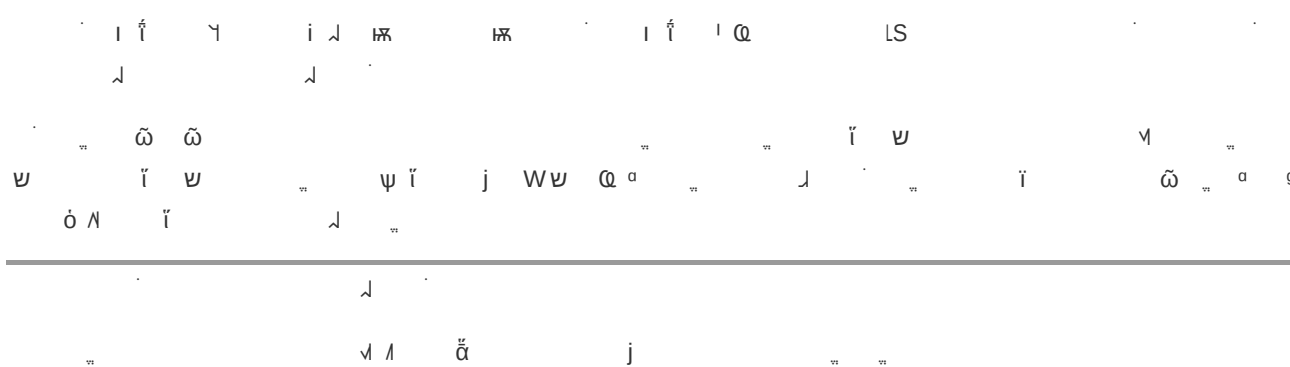

407<

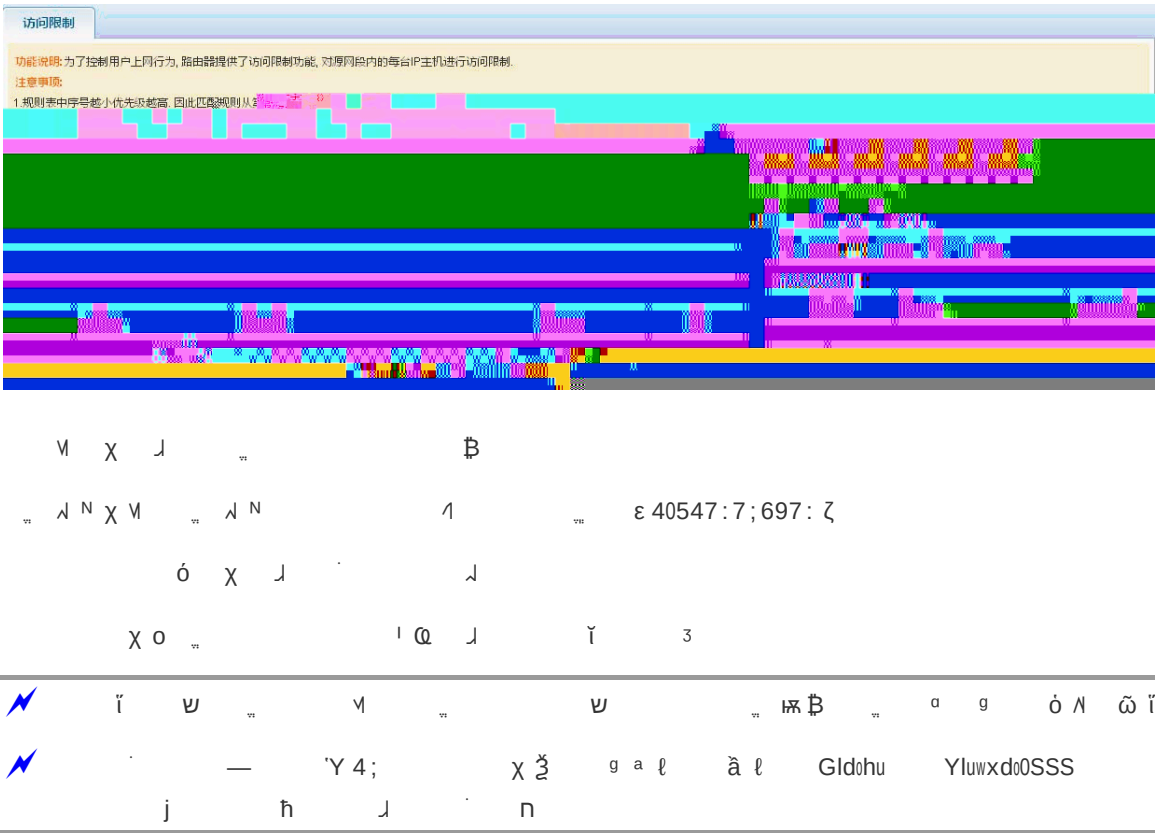

4083




1.3.6

1.3.6.1

ž	Đ	ã	z	!	ε	υ	ζ	lfps	iorrg	xgs	iorrg	`
υ		ĩ			υ							
ž		ı	õ	ž	W	'	a	ε	o	ı	ζ	
ž				ı								

4084

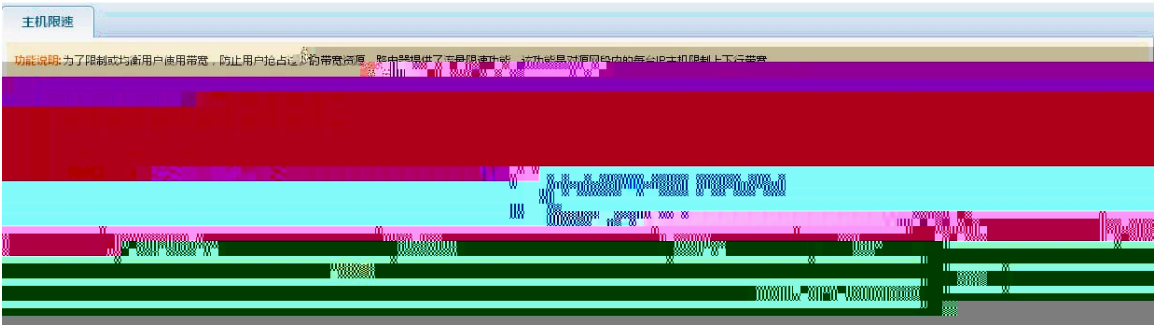

è	υ	χ	o	ı	"	O	i	ψ	ă	ı	a		
LS	ó	χ		ı	LS	ı	ó						
i	χ	ı	ı	ž	i								
ĩ	χ	ı	ı	ž	ĩ								
	χ	o			ı	Q	ı	ĩ	ı				
⚡	ž	—	'Y	4;	χ	ž	g	a	ł	ă	ł	Gldohu	Yluwxdo0SSS
	j	h	ı	ž	n								

4085

主机限速规则配置

接口名称:

源IP地址: * (例如: 192.168.0.1)

源IP地址掩码: * (例如: 255.255.0.0)

上行带宽: * (范围: 1-100000 kbps)

下行带宽: * (范围: 1-100000 kbps)

 隐藏

 星期时间

☐ 星期一 ☐ 星期二 ☐ 星期三

☐ 星期四 ☐ 星期五 ☐ 星期六 ☐ 星期日

开始时间 : 结束时间 :

1.3.6.2

n KTrV n κ λ TrVε Txdolw| ri Vhuylfh n ζ n ' 1 n

j a M ã κ n π' é n ψ ã κ ω λ

Λ λ H è j 'Y TrV ε γ γ ζ

λ , í n TrV κ λ 2 γ κ λ 7

KTrV o TrV j a @ TrV ž n n KTrV ' @ λ H n .

. . π TrV n H n TrV ' @ κ n n

σ n TrV ' @ κ n @% 1 ò π κ Z TrV

KTRV ' @ κ n ' κ Z' TrV ' @ κ í TrV γ

λ n

o n v b ö κ ε Z τ τ Z , ω ï j a ω

j a n ~ ï n ~ i λ n j a Ô γ

λ TrV ã n ψ KTrV ~ Z n ' ,


ï n

ï ' í κ ã j í κ τ ! ã j λ

ψ λ κ ï ã i τ n ψ

ï t ð λ ψ ð ï ψ τ



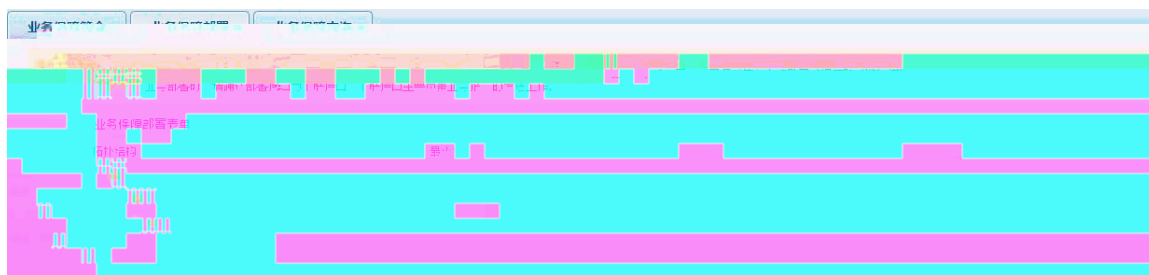

4,

4089



5, 增加部门

408:

增加部门【张佳成研】

个英文字符)

0,000 kbps)

0,000 kbps)

部门名称:

* (范围: 最多18

最小带宽:

* (范围: 0-1,000

最大带宽:

* (范围: 1-1,000


完成

取消

6, n d

ī n 、 增加业务 n ī n
n 6 d b

n d n n 1 GVFS G Ĩ H i i 1 w

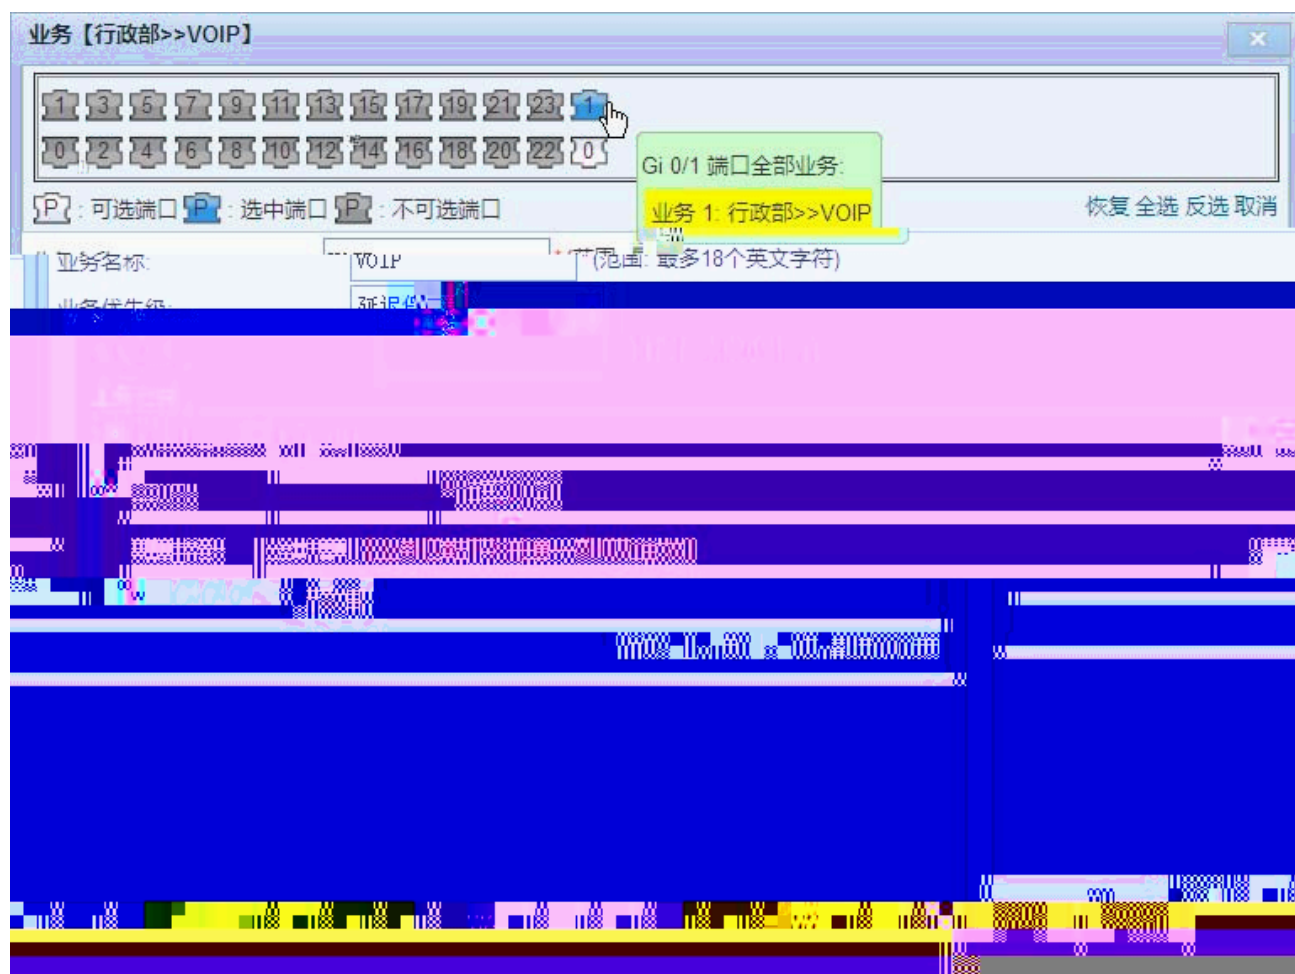

业务分类规则

TCP

UDP

IP

ICMP

动作: ☒ 允许 ☐ 禁止

☐ 任意源IP地址

地址类型: 单IP地址 源IP地址:

源端口范围(0-65535): -

☐ 任意目的IP地址

地址类型: 单IP地址 目的IP地址:

目的端口范围(0-65535): -

完成

取消

n M Z

GVFS χ n Γb ε Gliihuhqwldwhg Vhuylfhv Frgh Srlqw ζ /LHWI 4<<; w 45 ó Glii0Vhuy
ε Gliihuhqwldwhg Vhuylfh ζ TrV' 1 1 LS n 1 WRV È ` 9
5 È ` λ n' 1



└ ┆ ┆ λ η υ

j

w

n

j

⌘

n "

n

i i

i Q

% λ

`

a

i "

n 1 o

└

i

n

e y

n

n

1

e y

υ

4093

业务保障简介

业务保障部署

业务保障查询

1 3 6 7 9 11 12 15 17 19 21 23

10 12 14 16 18 10 12 14 16 18 20 22 20

{P}: 可选端口

: 选中端口

: 不可选端口

接口GigabitEthernet 0/1应用业务表



└

—

Y 4;

χ z

g a l

à l

Gldohu

Yluwxdo0SSS

j

h

n "

VQPS Y6 v J 7 VQPS 7

1.3.7.2

$$\frac{ZHE}{\chi} \quad \frac{1}{\chi} \quad \frac{ZHE}{\chi} \quad \frac{1}{\chi}$$


a n Q i

4097

密码设置		管理员权限	
说明:			
1、系统默认初始密码为：admin，请登录后立即修改。 2、密码长度至少8位，且包含字母、数字、特殊字符。 3、密码强度： ☐ 弱 ☒ 中 ☐ 强			
确定修改 清 空			

ɪ ʔ ɔ̃ p d g p l q b ɔ̃ ʈ Z H E ʌ ʌ ʌ ɪ ʔ j ɪ ɪ ʌ % ɹ Z H E
 ɾ ʌ ɾ ɪ ʌ Z H E ɾ ʌ ʌ ɳ ʌ ʔ ɾ W h o q h w ɾ ʊ ʃ ʌ
 ʌ p j x h w b ʌ p j x h w b



ᐃᕐ ᐅᑦ ᐃᕐ ᐃᕐ ᐃᕐ ᐃᕐ ᐃᕐ ᐃᕐ

4098

管理员权限

用户名：

*

登录密码：

*

授权页面：

编辑授权页面

添加管理员

☐	用户名	操作
☐	guest	编辑

删除选中

首页

上一页

1

下一页


尾页

/ 1 页

4099 dg p lq

ZHE	↙ ↗ ↘ ↖	ǃ p Dg plq b	ǃ		ʼ ɓ	ɣ	ɓ	á	ɣ	ZHE
ǃ	ɣ	ZHE	↙ ↗ ↘ ↖	ǃ	ɕ	ɣ	í	↙	₅	ʊ

409: j xhvW


$$ZHE \downarrow \gamma \downarrow A^{\alpha} \quad \dot{t} \qquad \tilde{\omega} \quad \gamma \quad \dot{t}$$

1.3.7.3

1 | @ 1 2 y a C | @ 1 ZHE e a / s u 1

1 x ` p b "O i 1 a ` p 1 b , x p*

1 b % ã v é j í 1 v é 83 v t 1 ã i 1 2 y

1 ã i a 2 y í 1 ZHE 1 o i

409 ;

软件升级

版本信息

软件版本: RGOS 10.4(3b13) Release(159680)
硬件版本: 1.00

说明: 软件升级可实现固件版本和WEB包的升级, 固件版本升级完成后须重启设备, 才能生效。

软件升级

浏览...

开始升级


 | @ 1 1 1 1 % v % i 1 a 1 1 y
 j i ä 6 s x 1 ä l v 7 1 1 y 1 83 y i


 1 ž y a l e ɰ p e l q b 1 Z H E a l e ɰ p x s g b 1
 v



 1 y | i i o d v k ä 7 z % j i ä 1 ä l
 v | i 7 j i u

1.3.7.4


[illegible]

409<


[illegible]




40:3

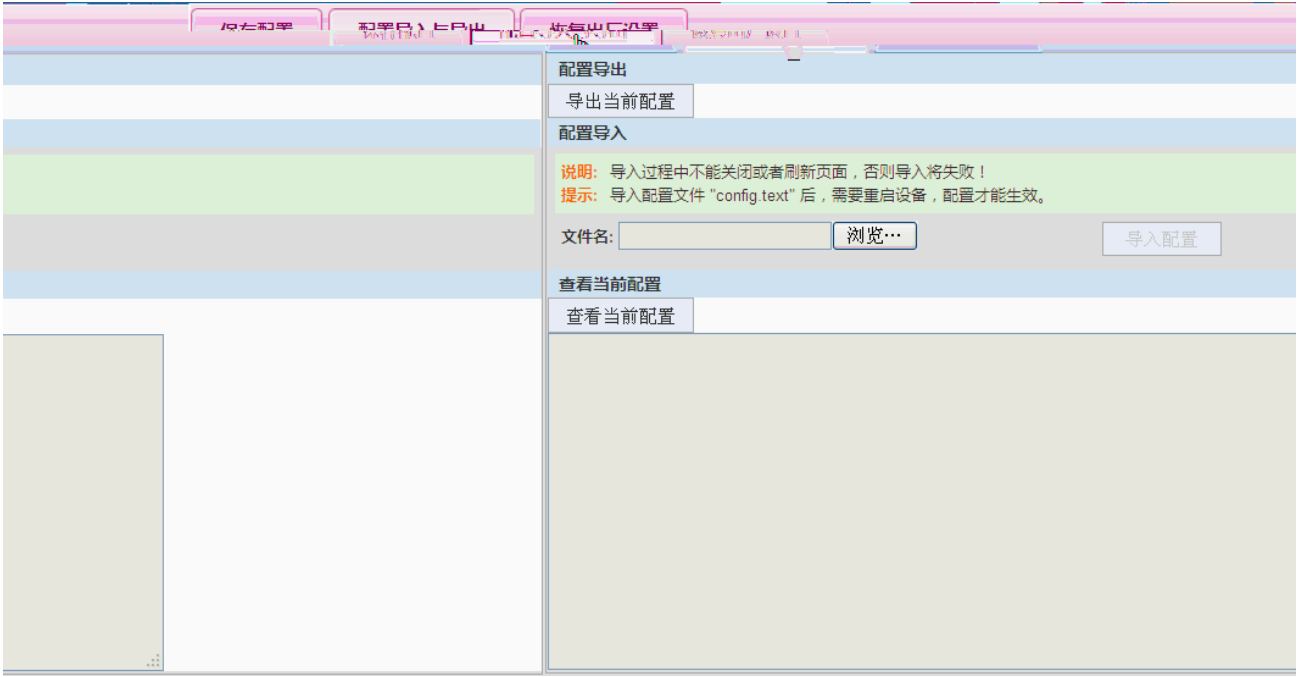

40:4



1.3.7.5



40:5

设备重启

提示: 重启过程需要几分钟左右的时间,请耐心等待,设备重启后将会返回登录界面。

立即重启设备

1.3.7.6

ή ΖΗΕ

è 丿 ㄣ ㄗ HE

40 : 6


操作日志		系统日志	
		提示：操作日志显示最多500条操作日志	
操作日志		操作日志	
时间	操作	时间	操作
2012-12-28 10:06:53	192.	2012-12-28 00:50:37	192.
2012-12-28 09:55:22	192.168.50.117	2012-12-26 15:32:14	192.168.50.117
2012-12-27 16:05:21	192.168.50.117	2012-12-26 15:32:00	192.168.50.117
2012-12-27 18:04:41	192.168.50.117	2012-12-26 15:28:33	192.168.50.117
192.168.50.117	新建策略路由成功		
192.168.50.117	外网接口 GigabitEthernet 0/0 保存成功		
192.168.50.117	外网接口 GigabitEthernet 0/0 保存成功		
192.168.50.117	外网接口 GigabitEthernet 0/0 保存成功		

✓ 1 ἡ

✓ 1 ḥ ḥ

 $\check{\alpha} \quad \tilde{\omega} \quad \vee \quad \wedge^{\sim}$
$$\dot{E} \sim LS^* \sim P^* \sim V$$

40:7

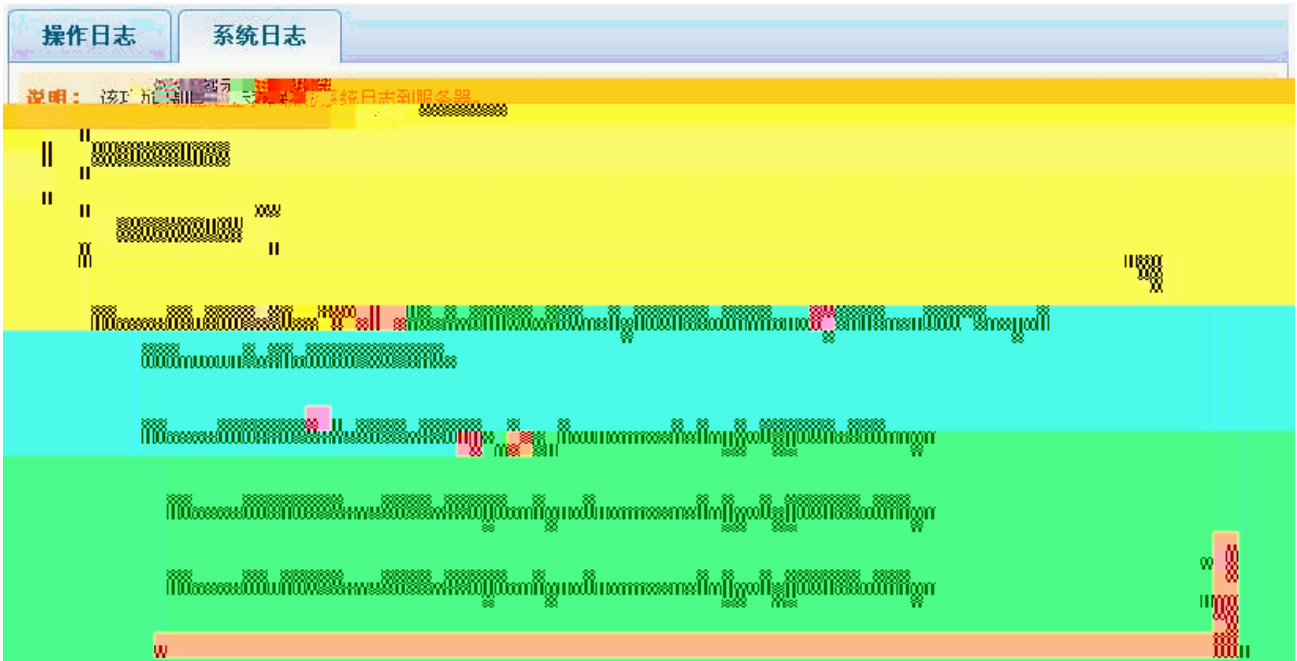

1.3.7.7

Ping

Slqj ħ ħ	ĭ	κ ρ \$\$\$\$ ħ	ĭ	κ ρ ...11 ħ
j ĭ				
ρ ħ ϭ	ĭ	/ ρ 1 ħ ϭ	j ĭ	ŵ ħ ħ ϭ ŵ

40:8



wudfhurxwh

T T

J H

I

I J H T

H J H

40:9



1.3.7.8

I q 8

I I q

J

I Q `

I


q

è

T

0

40::

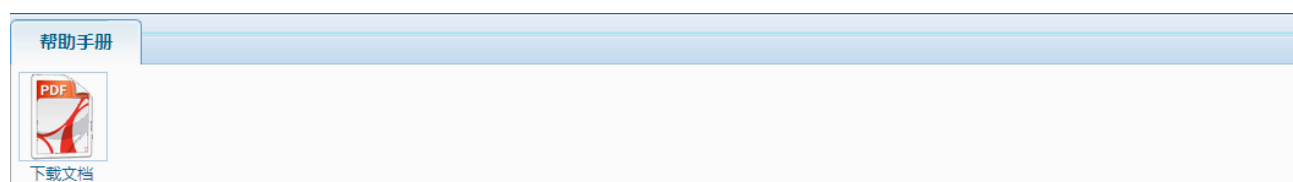

1.4

1.4.1

Q N 8

~

a

D

I

b

W J

Z

H

E

i

`

D

I

b

I Q N Q

a

N

p

8

I

W

J

T

S

U

N

Q

v

H

a

W

J

a

W J 8

T

N

X

I

E

J

J

I


v

v


40: ; ZHE



40: < ZHE ↘ ↗

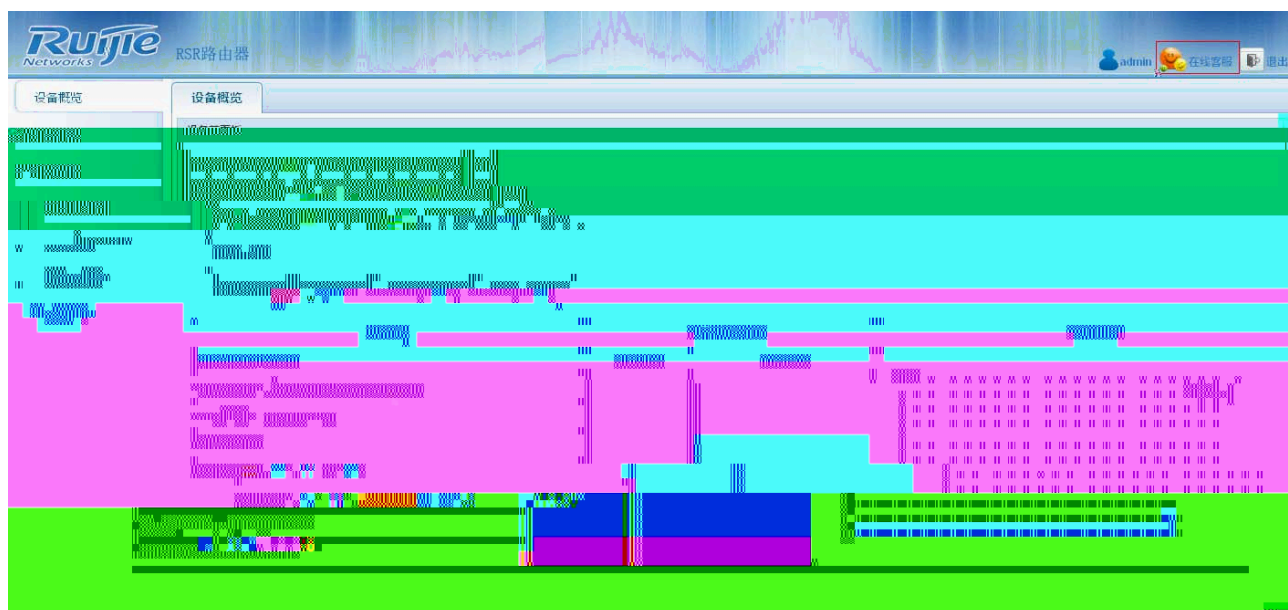

40;3 a n W J

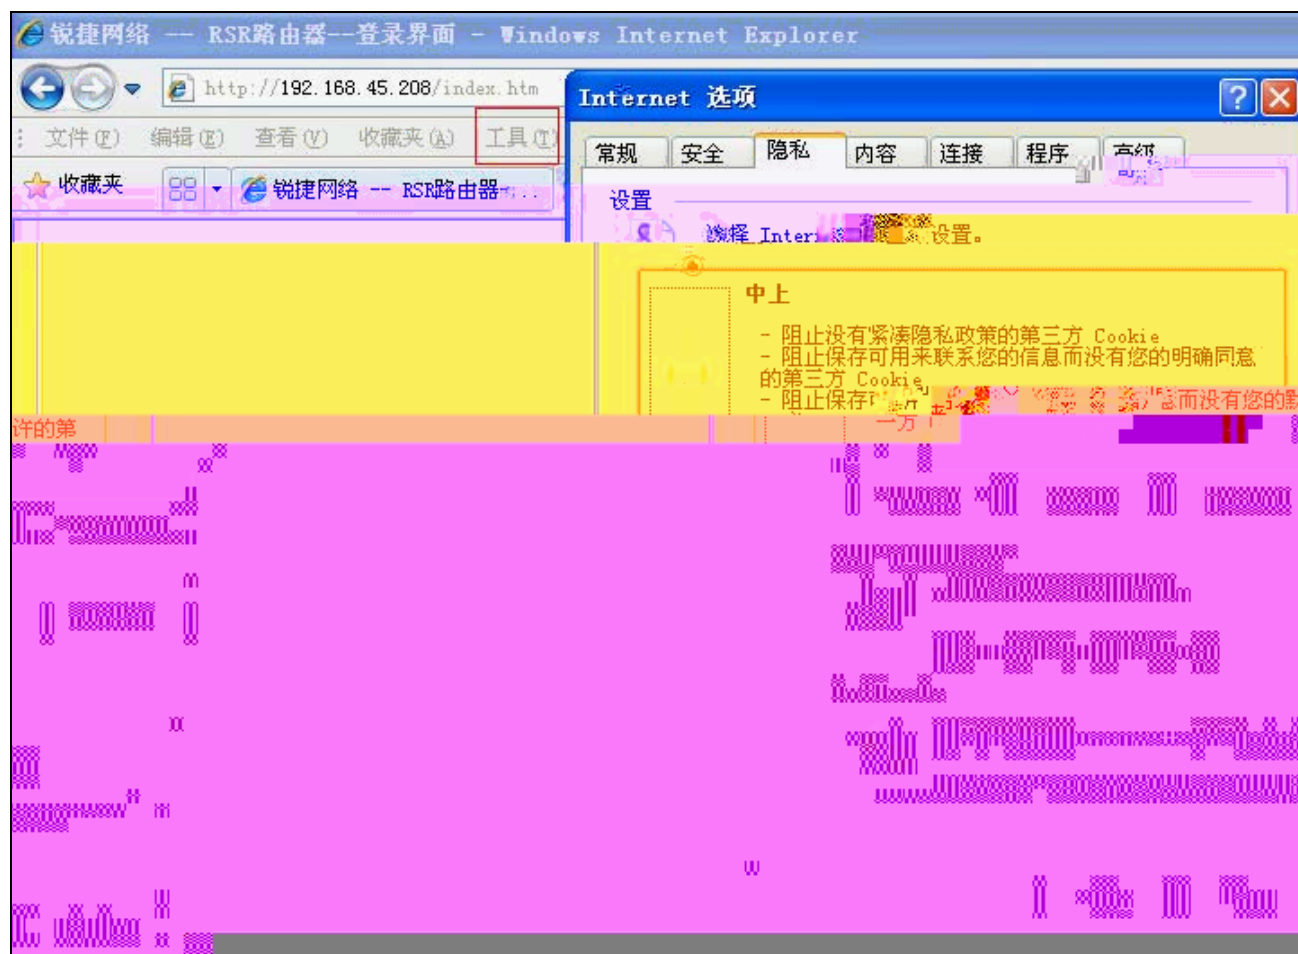

1.5.4 WEB

4X 3 SF 1* Slqj

ZHE

ZHE n

40;7 ZHE n

```
Ruijie(config)#show service
ssh-server : disabled
telnet-server : enabled
```

o glvdeohg b

ZHE n

n b hqdeoh vhuylfh z he0vhuyhu dno b

ZHE n

5X 3 SF j 1 Slqj

3

SF 7b

LS

3

..

3 4

3 4

6X 3

o 737 b

1 1 ZHE

3

ZHE

40;8 3

ZHE 7 4 A J W A s 7 ZHE 7 4 A a 43' 4 A
5 U s 43' W ZHE 8 5 U

8 43' j i U

— ä ð ñ ò
 ε 4; ζ
 ï χ
 SSSrHχ 7 Gldohu ψ
 VYL ε ∫ ζ χ 5 VYL ψ
 YSQ "O N χ 608 Yluwxdo0SSS ψ
 6J a ℓ j H4χ j UVU √ 9 o 9 ψ