



] G Õ Å

g é • ¯ Y u



Ø W

„Đ Ÿ

ê ± V

<http://www.ruijie.com.cn/>  
<http://webchat.ruijie.com.cn>  
<http://www.ruijie.com.cn/service.aspx>  
4008-111-000  
<http://support.ruijie.com.cn>  
[service@ruijie.com.cn](mailto:service@ruijie.com.cn)

7 × 24

4008-111-000

ü » ž j

|  |  |
|--|--|
|  |  |
|  |  |

1 C | O ”

RG-WALL 1600-X9300

3

80 Gbps

11 Gbps

3000

RG-WALL 1600-X9300

1.1 RG-WALL 1600-X9300

P á ? d

|   |                                 |
|---|---------------------------------|
|   | RG-WALL 1600-X9300              |
|   |                                 |
|   |                                 |
|   | 0 to 40°C                       |
|   | -35 to 70°C                     |
|   | 20% 90% RH                      |
|   | 14.7KG                          |
|   | 554 * 438 * 89 L * W * H mm 2RU |
|   | 100-240 VAC, 47-63 Hz           |
|   | 110V / 8A, 220V / 4A            |
| / | 338 / 406 W                     |
|   | 1,385 BTU/h                     |

|                         |     |                        |
|-------------------------|-----|------------------------|
|                         |     | 1-1 RG-WALL 1600-X9300 |
| Ø „ Â      d „ Â    ċ ċ |     |                        |
| RG-WALL 1600-X9300      | 1-2 | 1-7                    |
| 1-                      |     |                        |

G ø é Ô Ô

2.1 μ Ž `

RG-WALL 1600-X9300

ia

2.1.1 G μ

2.1.2 ? 6 μ

RG-WALL 1600-X9300



2.1.3 .600 μ

---

1~10


---





3 C | é G

3.1 G W 8

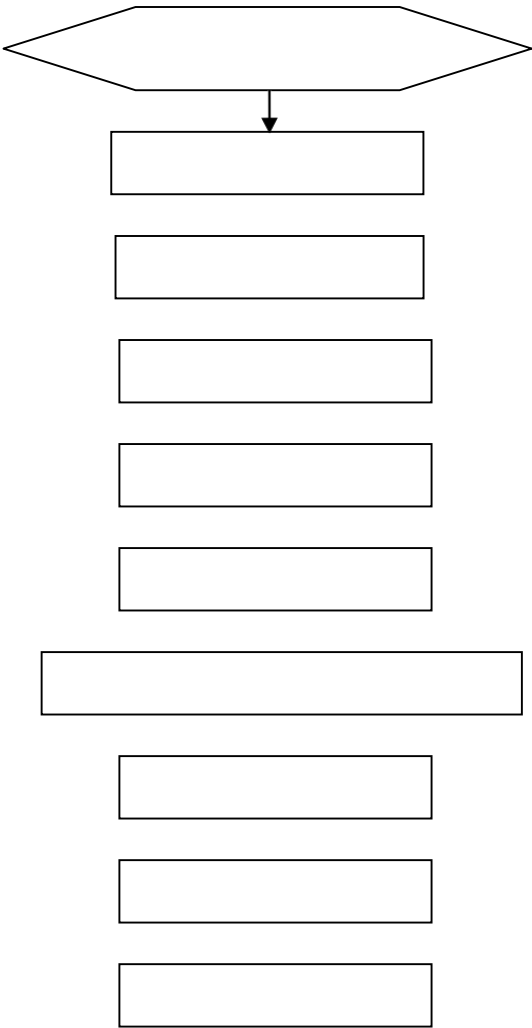

3.2 G ø é \

3.3 G 2 Ø

l 6 •

5mm

1.5cm

- G ^ L ±
- 1)
  - 2)

RG-WALL 1600-X9300

RG-WALL 1600-X9300

3.4 0 2 c G đ 2 Ò

l ċ 6 •

RG-WALL 1600-X9300

10mm

G ^ L ±

1) RG-WALL 1600-X9300

2) RG-WALL 1600-X9300

3) RG-WALL 1600-X9300 RG-WALL 1600-X9300

]

ä / é ^ L ±

1)

RJ45  
RJ45

2)

,

3)

RJ45

4)

**3.7** × Ô §

l ç 6 •

3)

---

---

---

---

2)

40G QSFP+

QSFP+

“ ”

3)

40G QSFP+

### 3.10 $\ddot{Y} \& T7 / L \pm c T \dot{o} d$

 $\ddot{Y}$  & **SFP+/SFP**  $\pm$ 

SFP+/SFP

1)

2) SFP+/SFP

3) 3) 6 μ ö " Q ‡ , ' ù { A ; ù 0 È -\$ 8 # " d £ Ä

4)

5)

ý Œ &B' =?±-\$?ö y4Ô È } )-l<FP @ T ã Ä

SFP+/SFP Q ‡, 'E÷0; ] ÈB' =?±+X {- \$ Õ@ " Q ‡, 'H { 7G 6 Ä

Y & SFP+ Ö §

SFP+

1)

2)

SFP+

SFP+

SFP+

PI XF ~~S~~FP+

8

a

Y & 40G QSFP+ ±

40G QSFP+

1)

2)

- 1)
- 2)

---

40G QSFP+




3)

&lt; &gt;

4-4

4-3

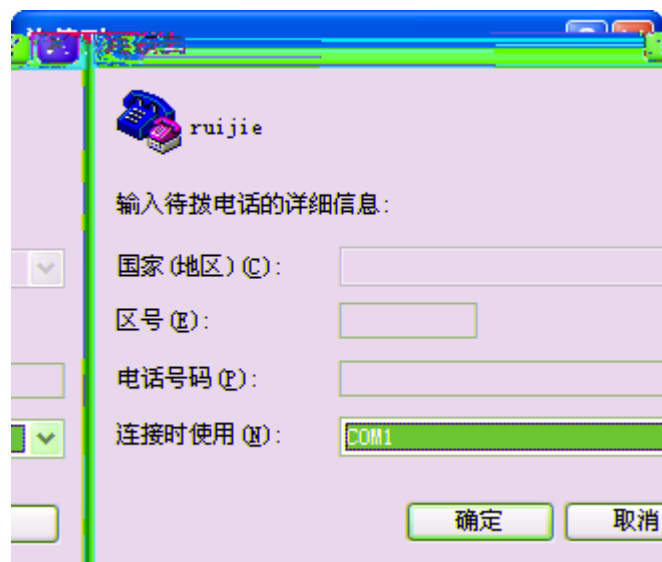

4) .

&lt; &gt;

4-5

9600



8

1

4-4



5) < > 4-6

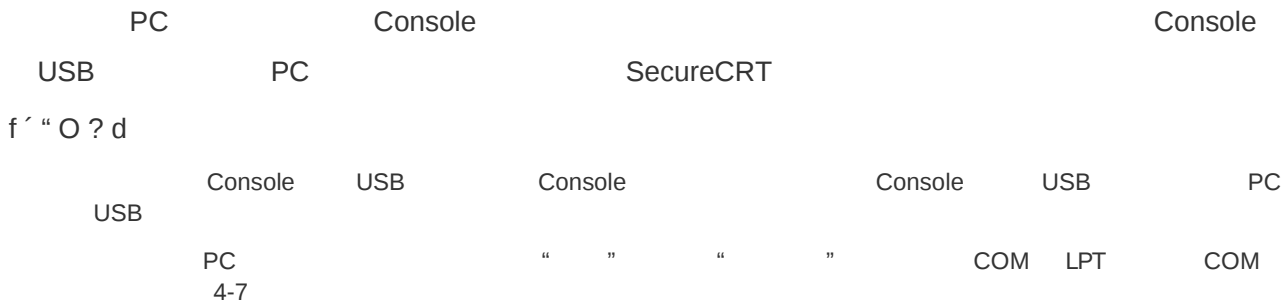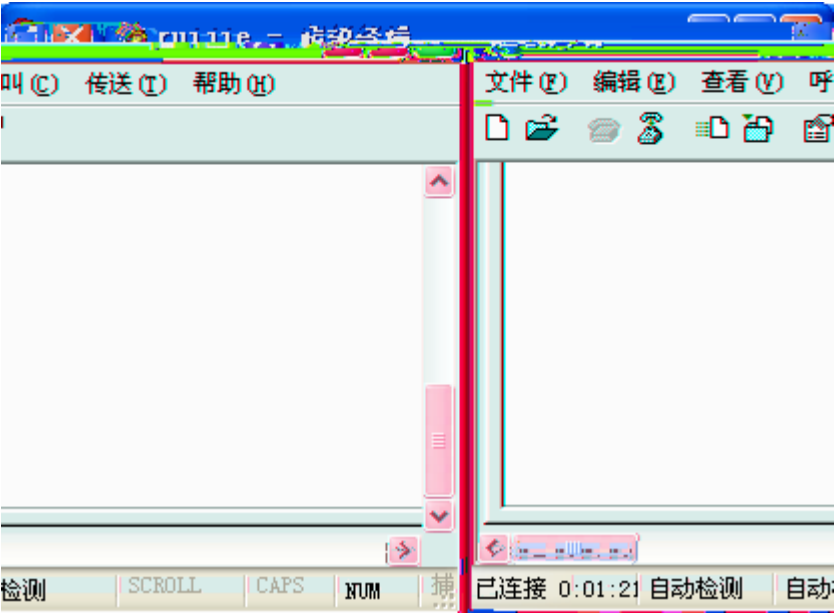






4-10

4) < > 4-11

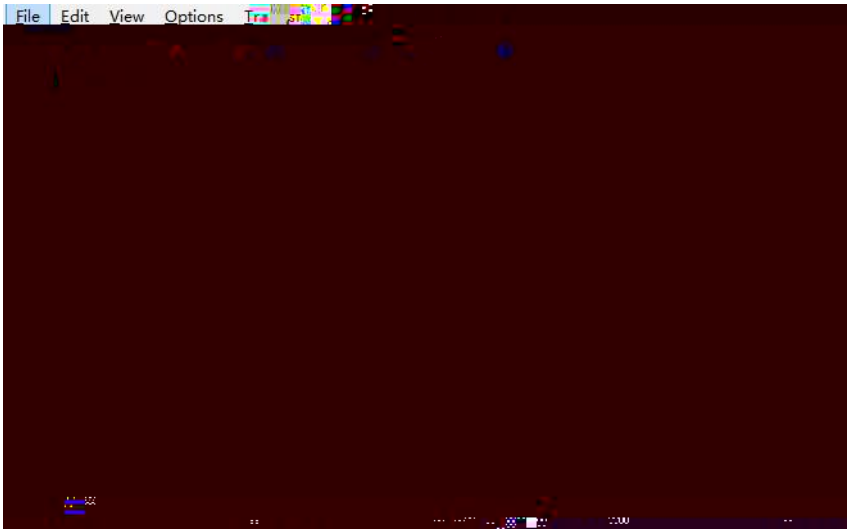

4-11

# 4.1 Ô n

Ô ø é ó Ó

PC

Ô d é ó Ó c 1 d

5 ñ 0 ¢ ò

5.1 ñ 0 ×

Ce

RG-WALL 1600




5.2 ] ¢ ã

Ô | é ¢ ã

6 G é \ m Ó Â

6.1 G \ m - Ó ù Ð W 8

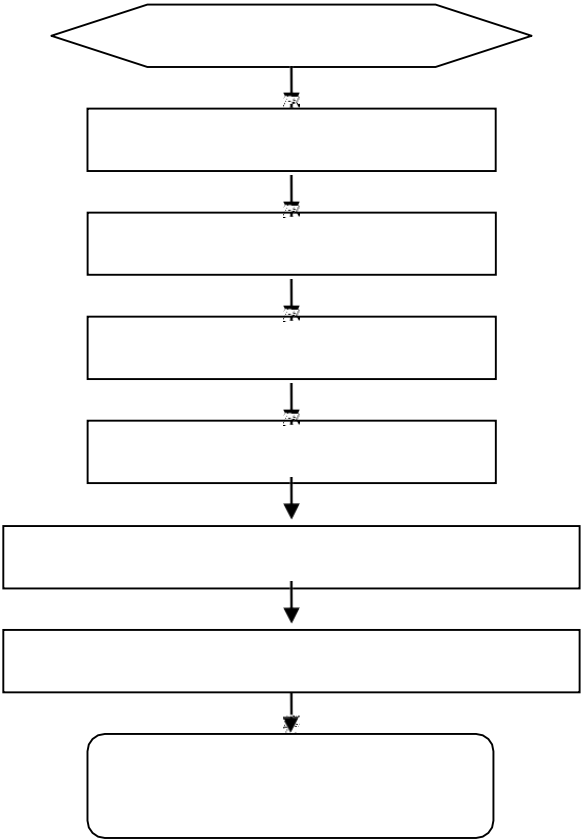

6.2 n N \ m Ó Â

\ m 1 u x ž æ ^ \$ á o ž

\ m 2 u @ W Ô | ± × ‡ Ô o ž

Status Power

\m 3u L0ñUxÎþ

\m 4u L0ñUÎþ1

\m 5u ¯LxD link

link

1

2 1310nm 1550nm

3

4

\ ¢   **A** — ä / — x ä / O ” y f

• Ž é ä /

A 4



# \ ¢ B — G é a Ž 1

RG-WALL 1600-X9300

19

Ô § £ 3 œ • « é L -

7

5

7

10

SFP+

5

10

— • £ 3 œ • « é L -

25


20

10

Ô § × • é l ċ 6 •

D-1


D-1

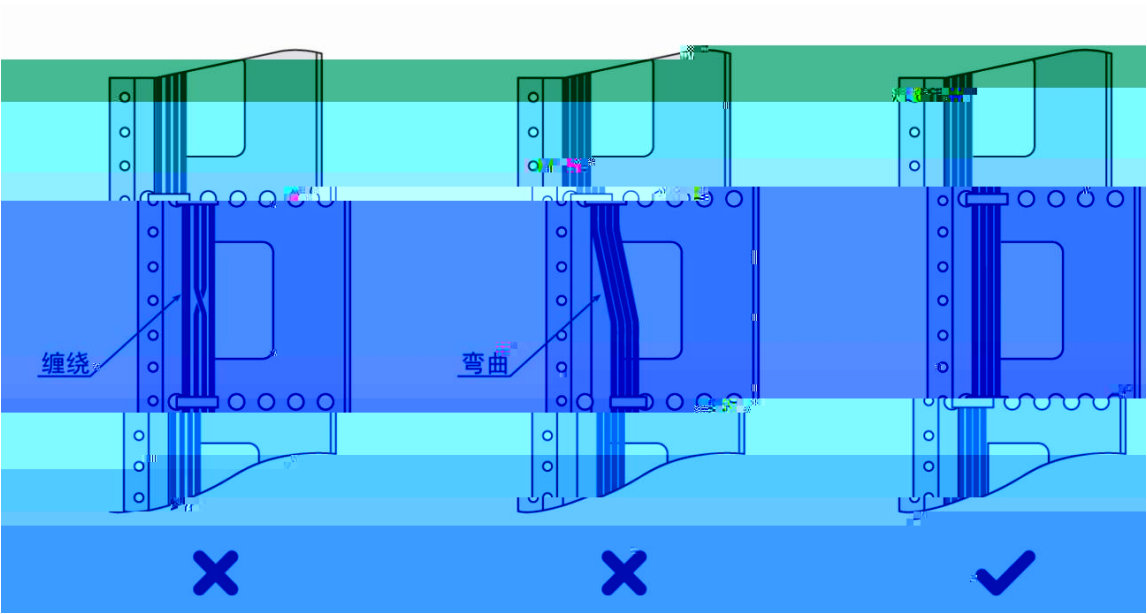

30mm

D-2

D-2

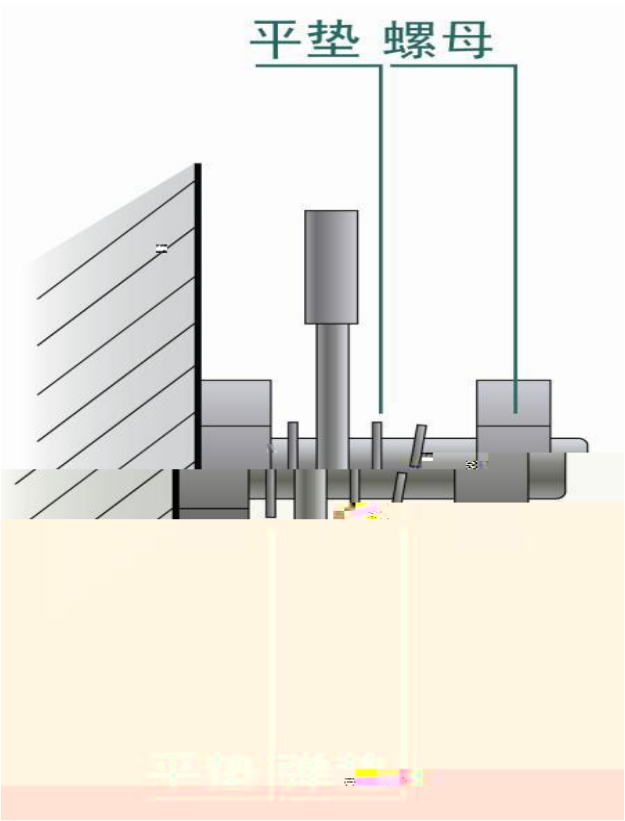

| mm    | mm      |
|-------|---------|
| 10    | 80~150  |
| 10~30 | 150~200 |
| 30    | 200~300 |