


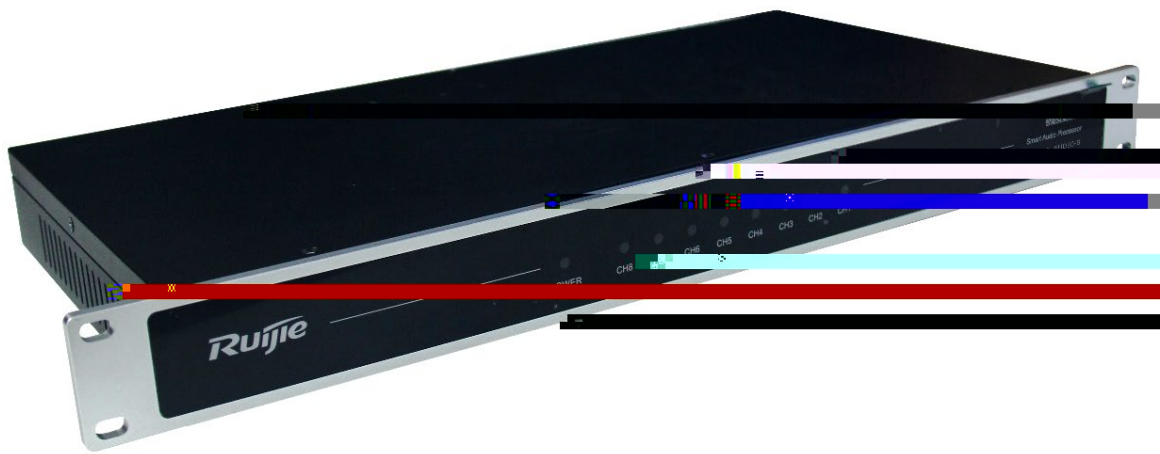


RG-AUD30-8

1-1

1-1

		1
		1
		2
485		1
		1
VBox		1
OUTPUT		1
3.5mm		1
		1
3	-	3
		1
		1

2.1

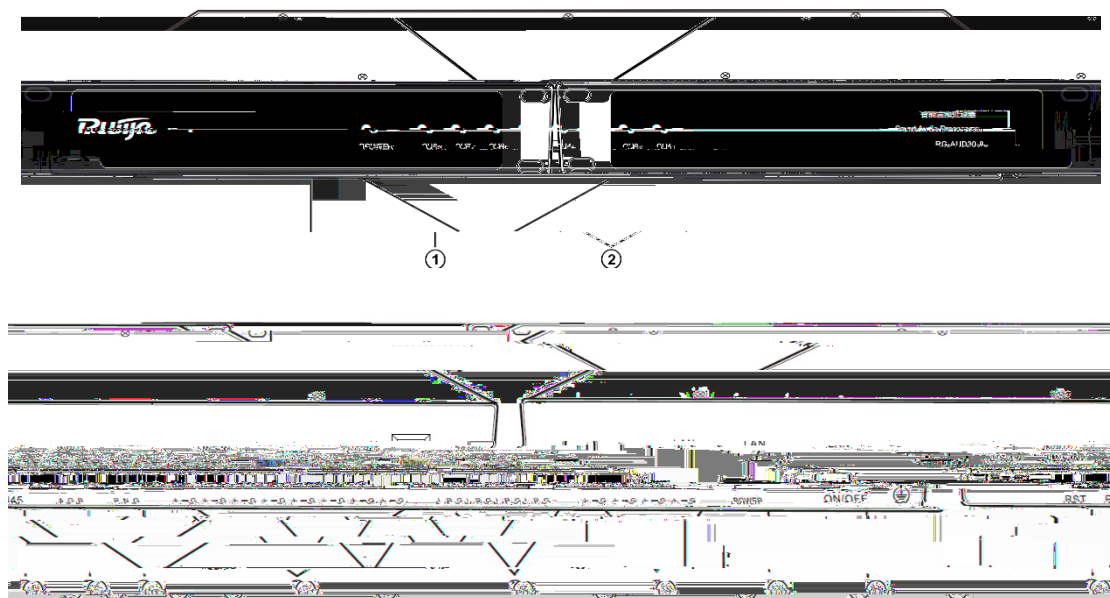

2.1-1

		—
	RS485	
	8	8 48V
	4	
	4	

2.1-2


2.2

2.2-1

2.3



2.3-1

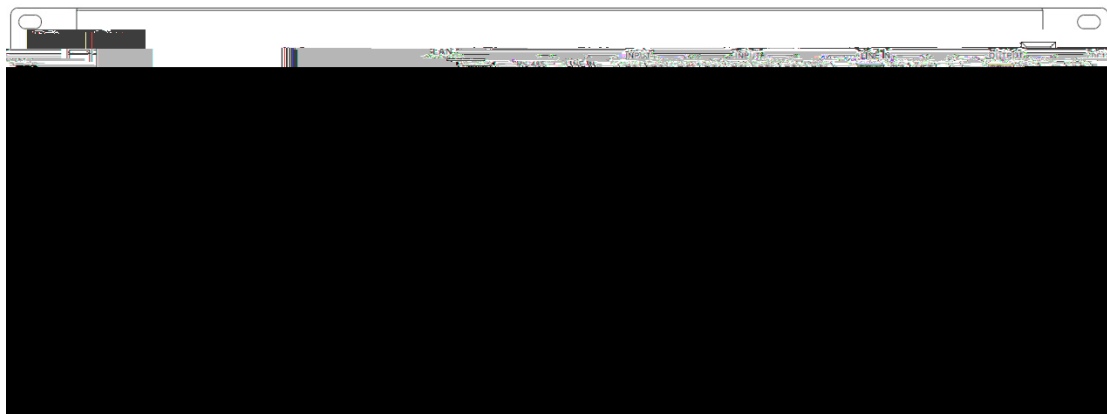

2.3-1

2*0.5RVVP	50
2*0.5RVVP	15
2*0.5RVVP	15

EQ

3.1

RJ45

IP

IP

IP 192.168.5.215

192.168.5.1

3.2

INPUT			
INPUT1~INPUT8	2 / 3 / 1	INPUT	+ / - / G
LINE IN	L / R / G	/	/

3.3

OUTPUT	+ / - / G	L / R / G
--------	-----------	-----------

3.4

20

	8	8 100Kohm 48V ,
	4 Line-in	4 RCA 6 dBV 100Kohm
		1 8
	4	4
	THD+N	≤ 0.002% @ +4dBu 1KHz

OUT PUT 4

1. RS485
UDP 20004
RS485 9600 8 1
2. dB
0dB f0 aa 0a 00 20 02 02 00 ee 8f
1dB f0 aa 0a 00 20 02 02 01 2f 4f
2dB f0 aa 0a 00 20 02 02 02 6f 4e
3dB f0 aa 0a 00 20 02 02 03 ae 8e
4dB f0 aa 0a 00 20 02 02 04 ef 4c
5dB f0 aa 0a 00 20 02 02 05 2e 8c
6dB f0 aa 0a 00 20 02 02 06 6e 8d
7dB f0 aa 0a 00 20 02 02 07 af 4d
8dB f0 aa 0a 00 20 02 02 08 ef 49
9dB f0 aa 0a 00 20 02 02 09 2e 89
10dB f0 aa 0a 00 20 02 02 0a 6e 88
11dB f0 aa 0a 00 20 02 02 0b af 48
12dB f0 aa 0a 00 20 02 02 0c ee 8a
13dB f0 aa 0a 00 20 02 02 0d 2f 4a
14dB f0 aa 0a 00 20 02 02 0e 6f 4b
15dB f0 aa 0a 00 20 02 02 0f ae 8b

LINE IN 3

1. RS485
UDP 20004
RS485 9600 8 1
2. dB
OUTPUT34
-12dB: f0 aa 0a 00 20 01 03 00 1f 1f
-11dB: f0 aa 0a 00 20 01 03 01 de df
-10dB: f0 aa 0a 00 20 01 03 02 9e de
-9dB: f0 aa 0a 00 20 01 03 03 5f 1e
-8dB: f0 aa 0a 00 20 01 03 04 1e dc
-7dB: f0 aa 0a 00 20 01 03 05 df 1c
-6dB: f0 aa 0a 00 20 01 03 06 9f 1d
-5dB: f0 aa 0a 00 20 01 03 07 5e dd
-4dB: f0 aa 0a 00 20 01 03 08 1e d9

-3dB: f0 aa 0a 00 20 01 03 09 df 19
-2dB: f0 aa 0a 00 20 01 03 0a 9f 18
-1dB: f0 aa 0a 00 20 01 03 0b 5e d8
0dB: f0 aa 0a 00 20 01 03 0c 1f 1a
1dB: f0 aa 0a 00 20 01 03 0d de da
2dB: f0 aa 0a 00 20 01 03 0e 9e db
3dB: f0 aa 0a 00 20 01 03 0f 5f 1b
4dB: f0 aa 0a 00 20 01 03 10 1e d3
5dB: f0 aa 0a 00 20 01 03 11 df 13
6dB: f0 aa 0a 00 20 01 03 12 9f 12
7dB: f0 aa 0a 00 20 01 03 13 5e d2
8dB: f0 aa 0a 00 20 01 03 14 1f 10
9dB: f0 aa 0a 00 20 01 03 15 de d0
10dB: f0 aa 0a 00 20 01 03 16 9e d1
11dB: f0 aa 0a 00 20 01 03 17 5f 11
12dB: f0 aa 0a 00 20 01 03 18 1f 15
13dB: f0 aa 0a 00 20 01 03 19 de d5
14dB: f0 aa 0a 00 20 01 03 1a 9e d4
15dB: f0 aa 0a 00 20 01 03 1b 5f 14
16dB: f0 aa 0a 00 20 01 03 1c 1e d6
17dB: f0 aa 0a 00 20 01 03 1d df 16
18dB: f0 aa 0a 00 20 01 03 1e 9f 17
19dB: f0 aa 0a 00 20 01 03 1f 5e d7
20dB: f0 aa 0a 00 20 01 03 20 1e c7
21dB: f0 aa 0a 00 20 01 03 21 df 07
22dB: f0 aa 0a 00 20 01 03 22 9f 06
23dB: f0 aa 0a 00 20 01 03 23 5e c6
24dB: f0 aa 0a 00 20 01 03 24 1f 04

RUIJIE NETWORKS CO.,LTD.

Ruijie Science and Technology Park, Ju Yuan Zhou, No.618, Jin Shan Road ,FuZhou

Service Email:service_rj@ruijienetworks.com Technical Support: <http://www.ruijienetworks.com/service.aspx>

Service Online(International): <http://www.ruijienetworks.com/services> Website: <http://www.ruijienetworks.com>

618

Email: service@-1.9 (r).e/2_0 1 Tf 0 Tc 0 .1 (@0 >0.6 (c)-6.1 (o .1.8 m.l)7.5 (c)-4 n .1 (@() TJ EMC /Span <</MCID 4