

III

Ч

Ч

III

III

III




1.1

1.2

1.2.1.1 RG-AP130(W2)

	2.4G 2 × 2MIMO
	5G 2 × 2MIMO
	2.4G 802.11b/g/n
	5G 802.11a/n/ac wave2
	802.11b/g/n 2.4G ~ 2.4835GHz
	802.11a/n/ac 5G 5.150 5.350GHz 5.47 5.725 5.725 5.850GHz (


	PoE	802.3af/802.3at	DC	5V/2A
	≤ 8W			
	0°C	45°C		
	-40°C	70°C		
	5	95		
	5	95		

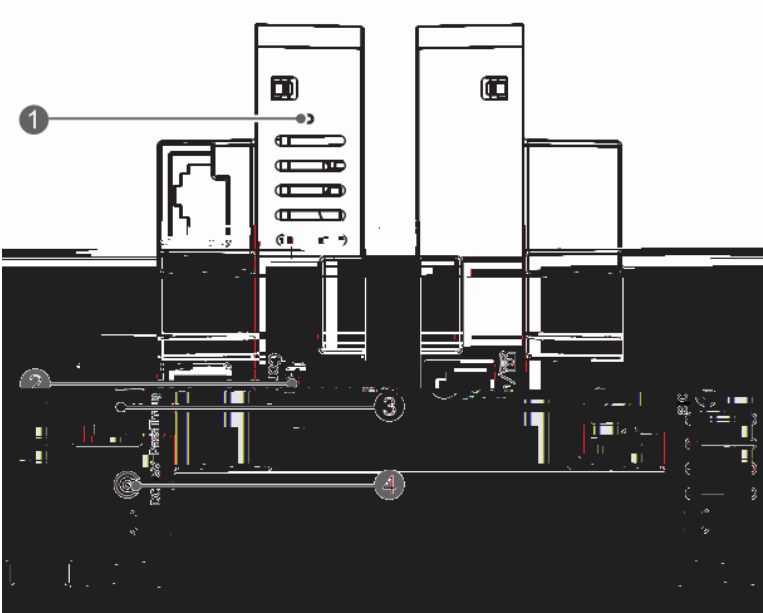

1-2

MicroUSB (Console)
PassThrough
DC

1-3 RG-AP130(W2)

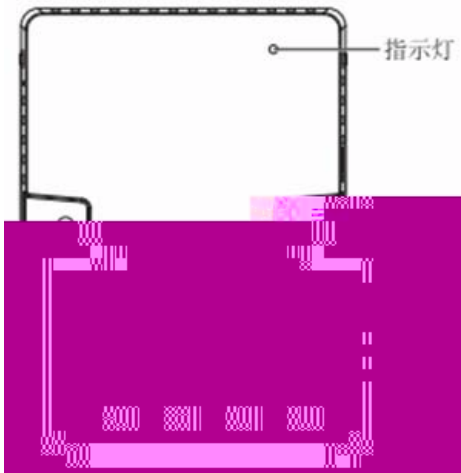

1-3 RG-AP130(W2)

		AP
	2.5Hz	AP
	2.5Hz	AP
	1Hz	AP LINK DOWN
	1Hz	AP LINK UP CAPWAP
	0.4Hz	AP CAPWAP

1.2.1.3 RG-AP130(W2)

RG-AP130(W2)	POE	DC	III
■ POE		44-57V	0.25A
■ DC		5V	2A

1.35mm	3.5mm	6.4mm	

POE	802.3af PoE	.
-----	-------------	---


1.2.1.4 RG-AP130(W2)

RG-AP130(W2)	III	86
--------------	-----	----

RG-AP5E1W2)

3

3.1

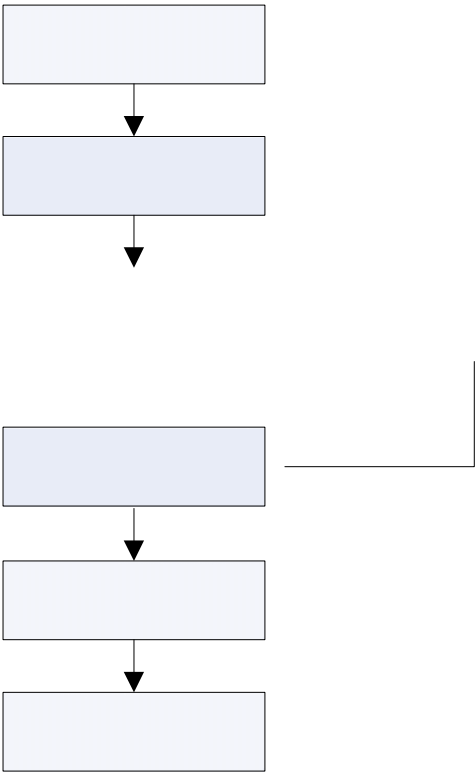

拆开面板盖

WAN口接PoE


安装主机

- ϣ
-
-
-


3.3

AP æ


AP

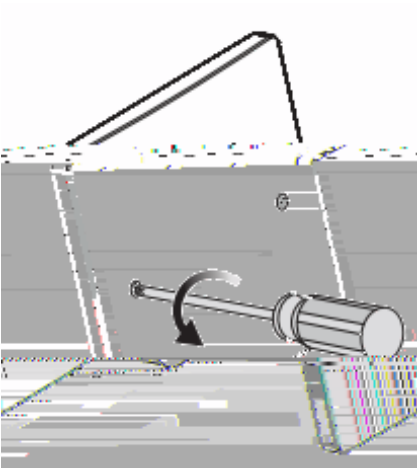

1 86

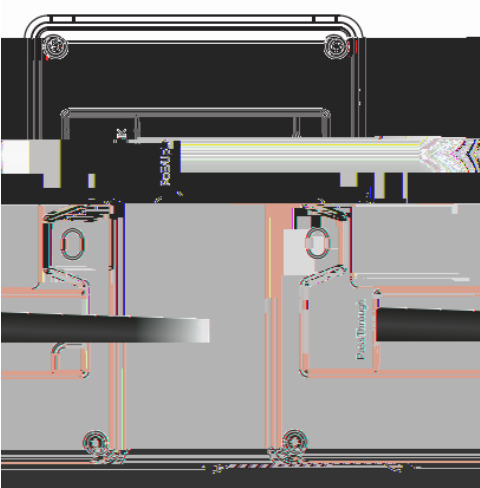


2 UpLNK PassThrough

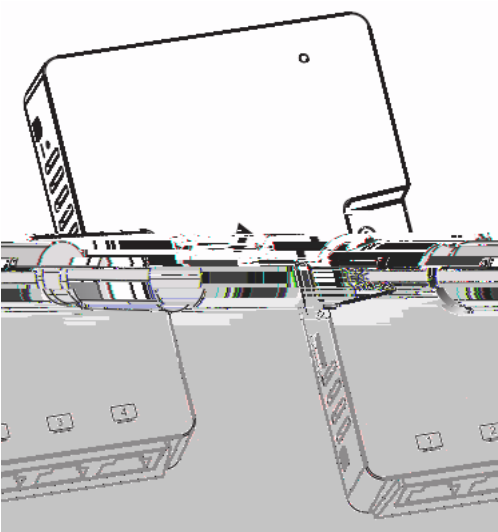

3 RG-AP130(W2) 86



4 RG-AP130(W2)

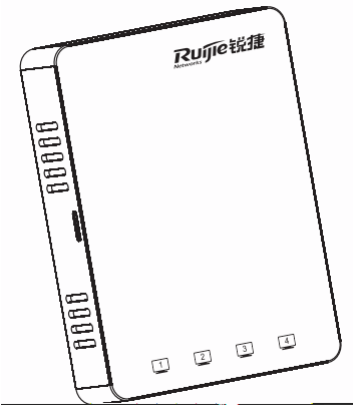

PoE

AP

III


PoE

802.11af PoE

III

AP

4-2 LED

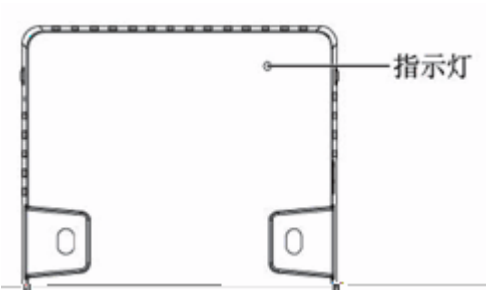

4.3 /

III

4-3 III

4-3



4.3.1

III	1mm	2S
-----	-----	----

4.3.2

III	1mm	3S
-----	-----	----

5

5.1

AP


III



AP

6

6.1

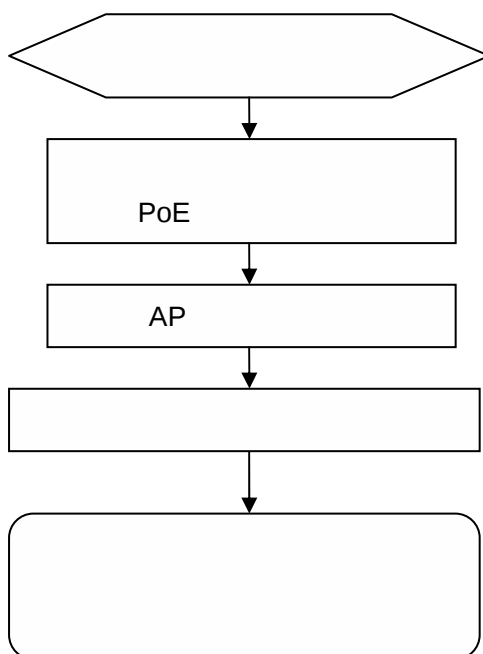

6.2

1

PoE

802.11af

III

III

2

LED

III

3

AP

1)

III

2)

AP

III

3)

AP

III

4)

AP

III



RG-AP130(W2)

œ

œ

£

