

-
-


		2
		2
1		4
1.1		

1.2

		RCD6000 V4	RCD4500 V4


1.3

1.3.1

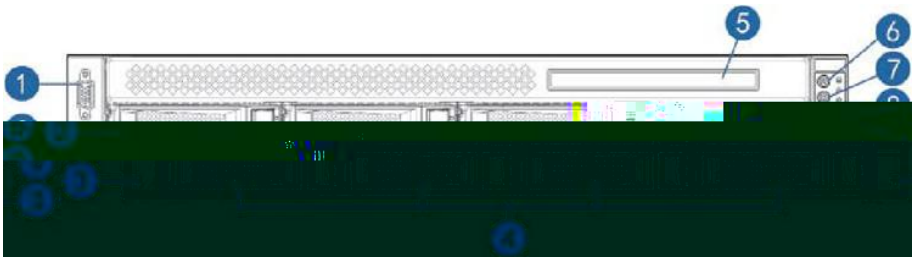

1	VGA
2	USB 3.0
3	
4	
5	()
6	
7	ID
8	


•

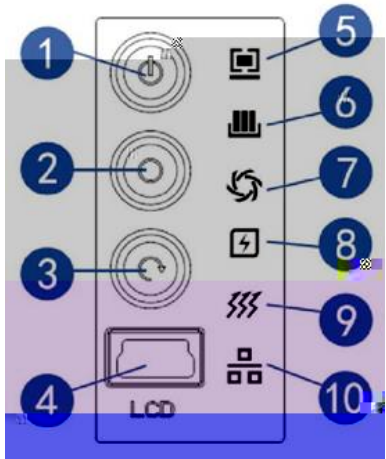

1	
2	ID
3	
4	LCD
5	

	6	
	7	
	8	
	9	
	10	

1.3.2

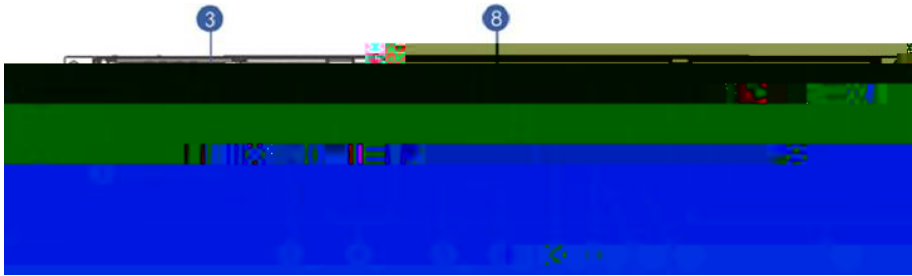

•

1.4

RCD V4

2.5 3.5 SATA

•



1.6.1

	AC 100 240 Vac;50/60Hz
	7 3.5A
	12V
	45A MAX
	550W
	0 ~+50
	-40 ~+70
	5%~85%
	5%~95%
	0~5000m

1.6.2

--	--	--	--

2

2.1



2.1.1



- 1 19
- 2
- 3
- 4
- 5

2.1.2



2.1.3



2.1.4



2.2

2.2.1

2.2.2

0.8
0.4

2.2.3 /

- 0 ~40
- 35%~80%

	1.5m	0.4m
---	------	------

2.2.4

0.5um	≥	/m³
		Ψ

2.2.5




2.2.6

(1) 4 19

(2) 19 465mm

19

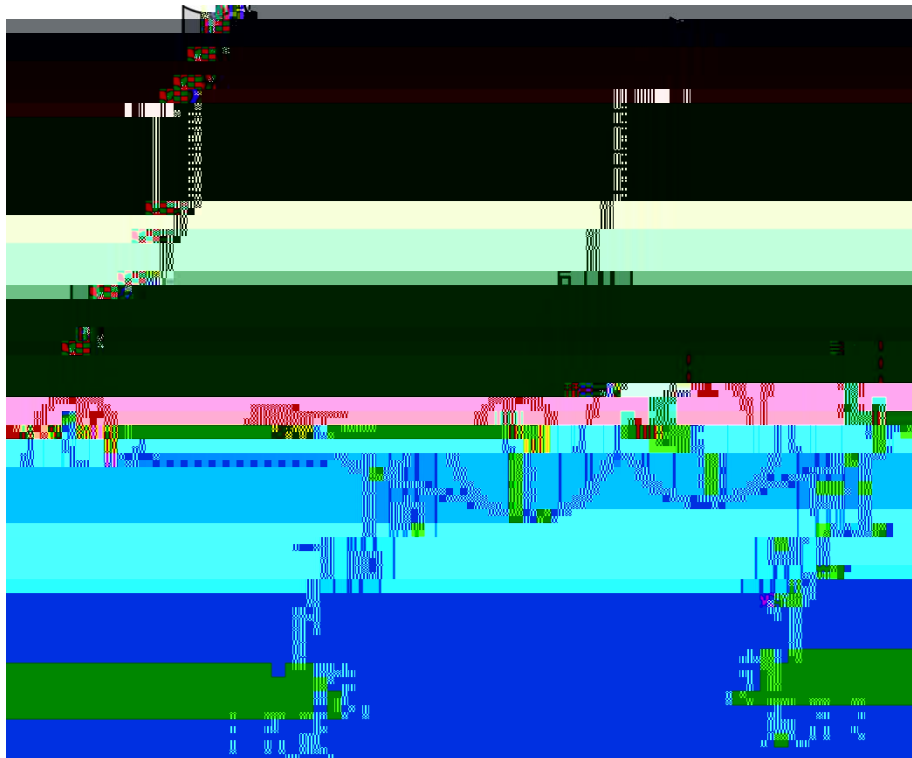

3
155mm

80mm
1000mm


25mm

4


3





3.1

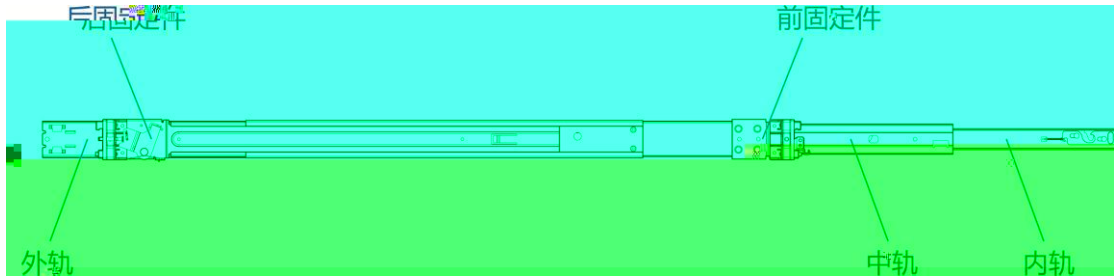

1

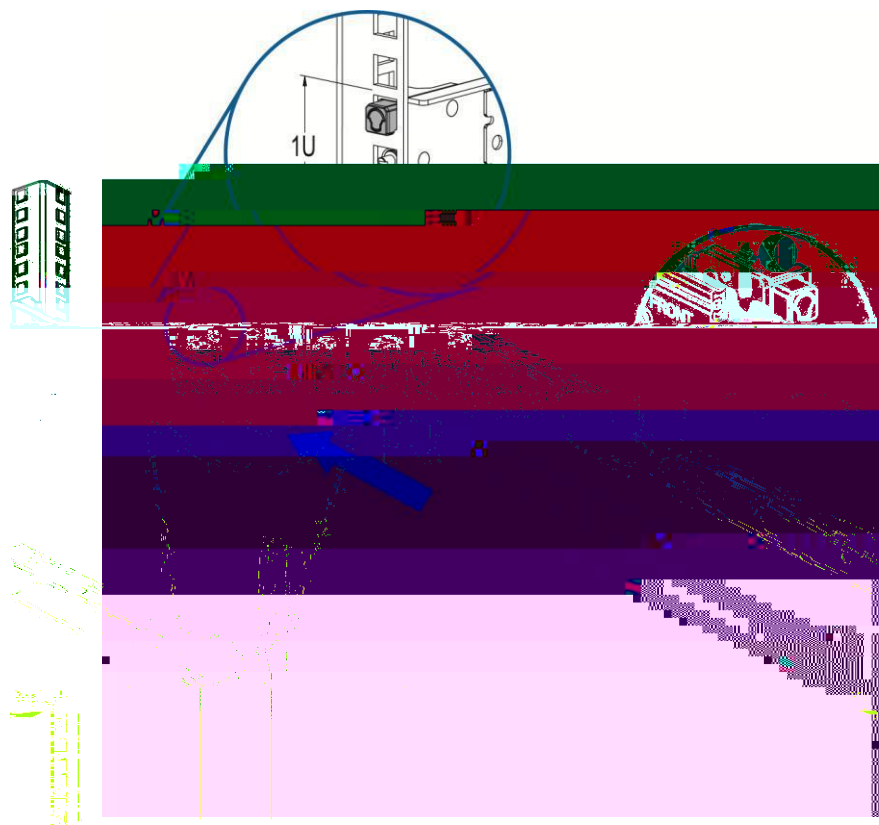



2

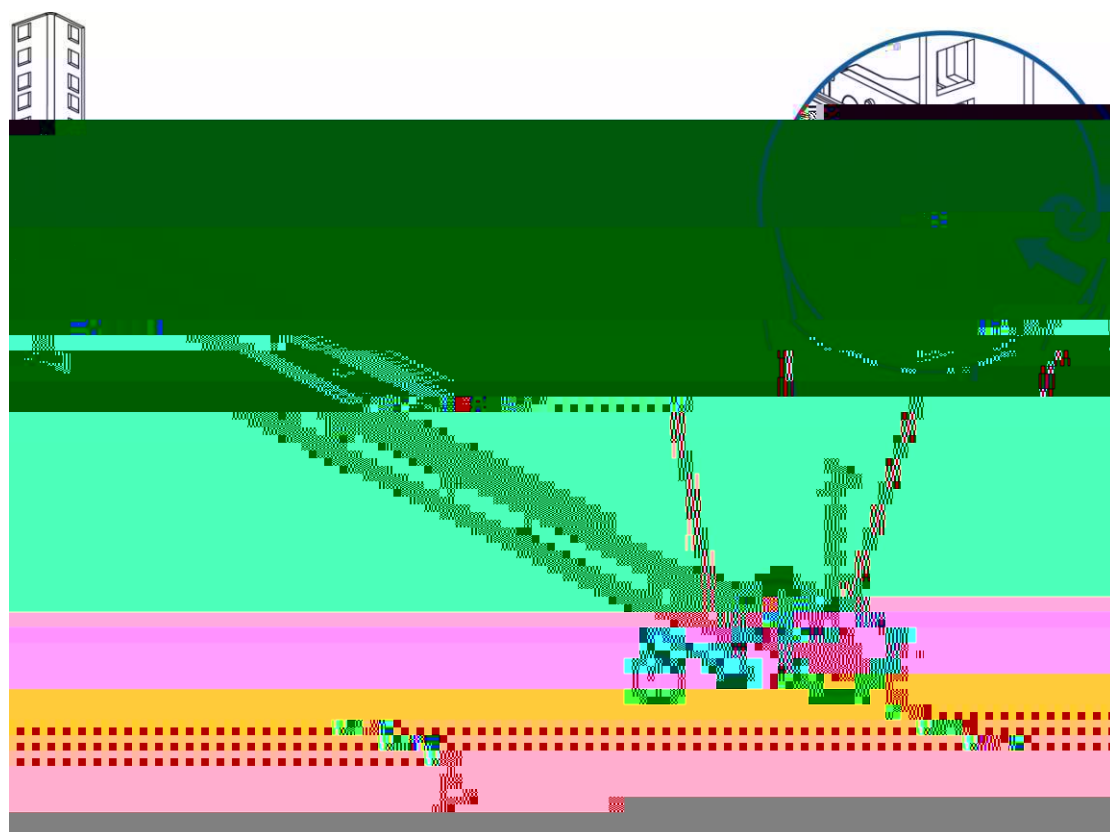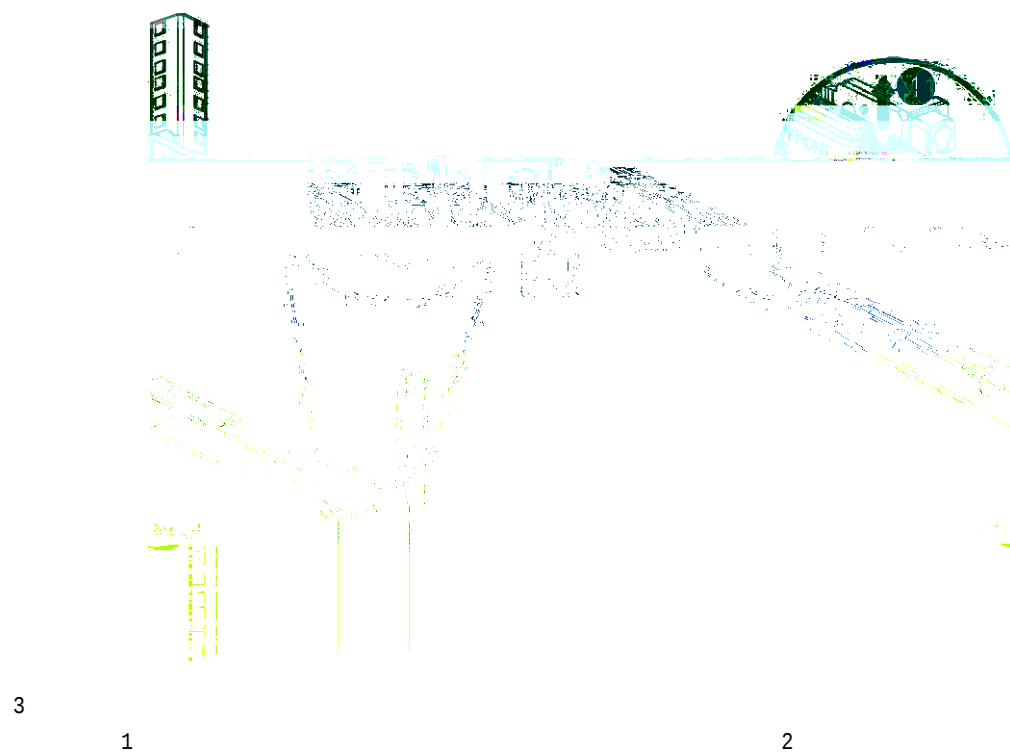

4

2 3

9

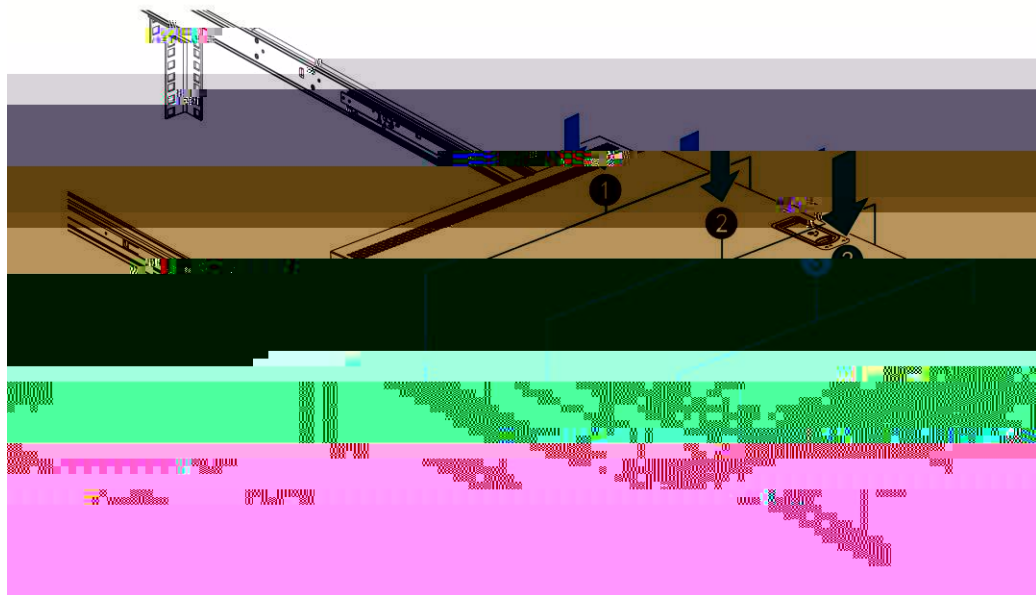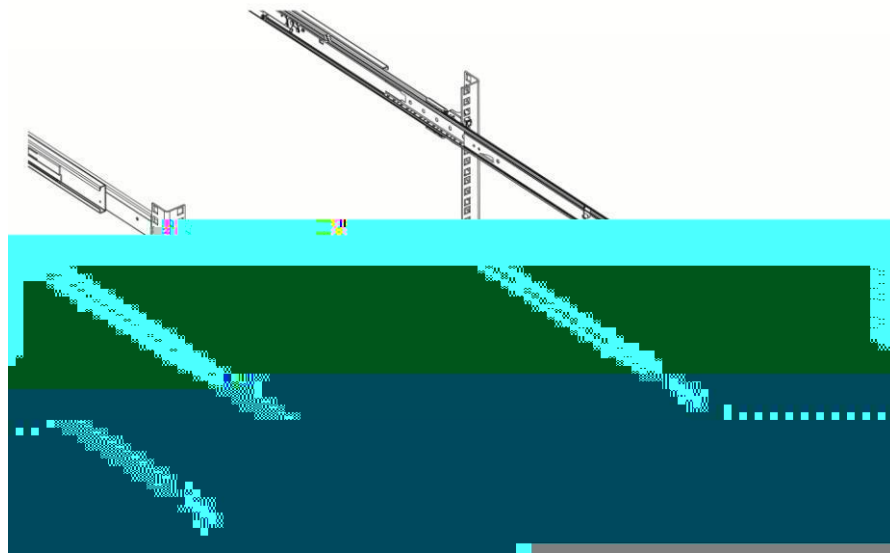

4

4.1

■	
■	DC
■	
■	
	400

4.2

	,	TUI	,	ping
■				
■	bios	,		
■		Delete	bios	
			400	

4.3