



RG-DDP

v1.0

©2013



RGOS 10.X (X)

■

■

■

■

■

[] []

{x|y|...}

[x|y|...]

//

2)



3)



.....	1-3
.....	1-1
.....	2-2
.....	2-2
.....	3-2
.....	4-3
.....	4-3
.....	4-5
.....	4-5
.....	4-6
.....	5-7
.....	5-7
.....	5-7
.....	6-8
.....	6-8
.....	6-8
.....	6-8
.....	6-11
.....	7-12
.....	7-12
.....	7-13
.....	7-13
.....	7-14
.....	8-14
.....	8-14

1 WEB



WEB

WEB

WEB



2

■	WEB	WEB	WEB	PC
		IPAD		
■	Google WEB	Firefox	IE9.0	IE QQ Maxthon
■		1024*768	1280*1024	1440*960


3 WEB

IP http://192.168.1.200,



3-1

“ ”

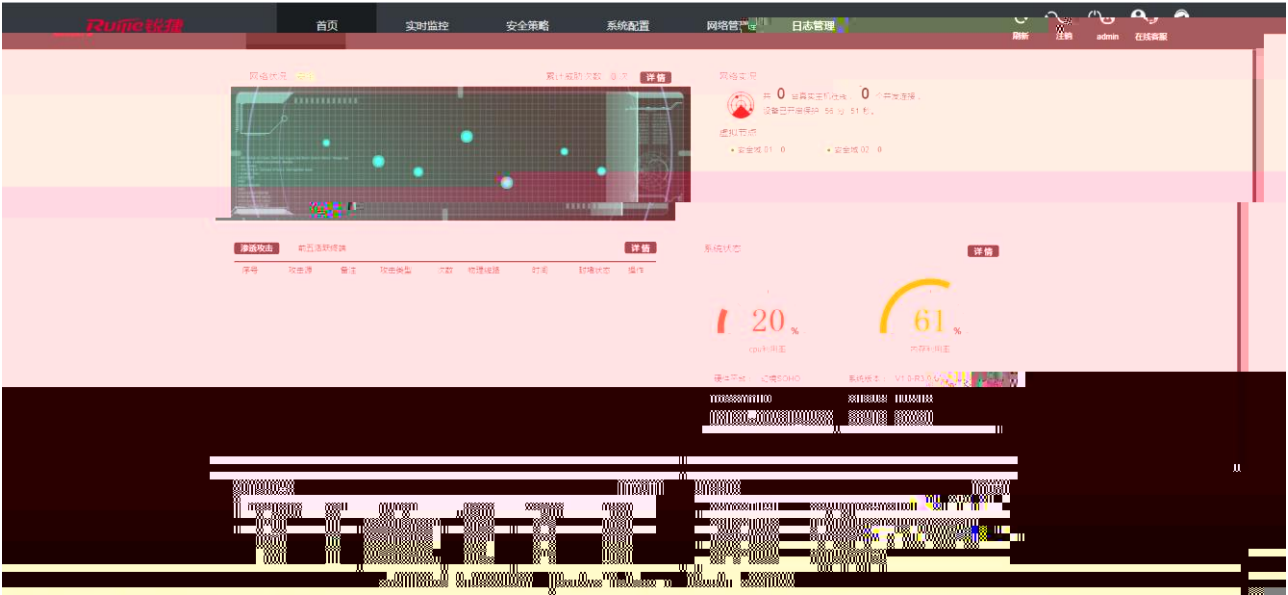


3-2 WEB

4

4.1



系统管理员							
删除 写入key		1	超级管理员	-	-	-	DKey登陆
删除 修改		2	admin 管理员	-	-	-	口令认证

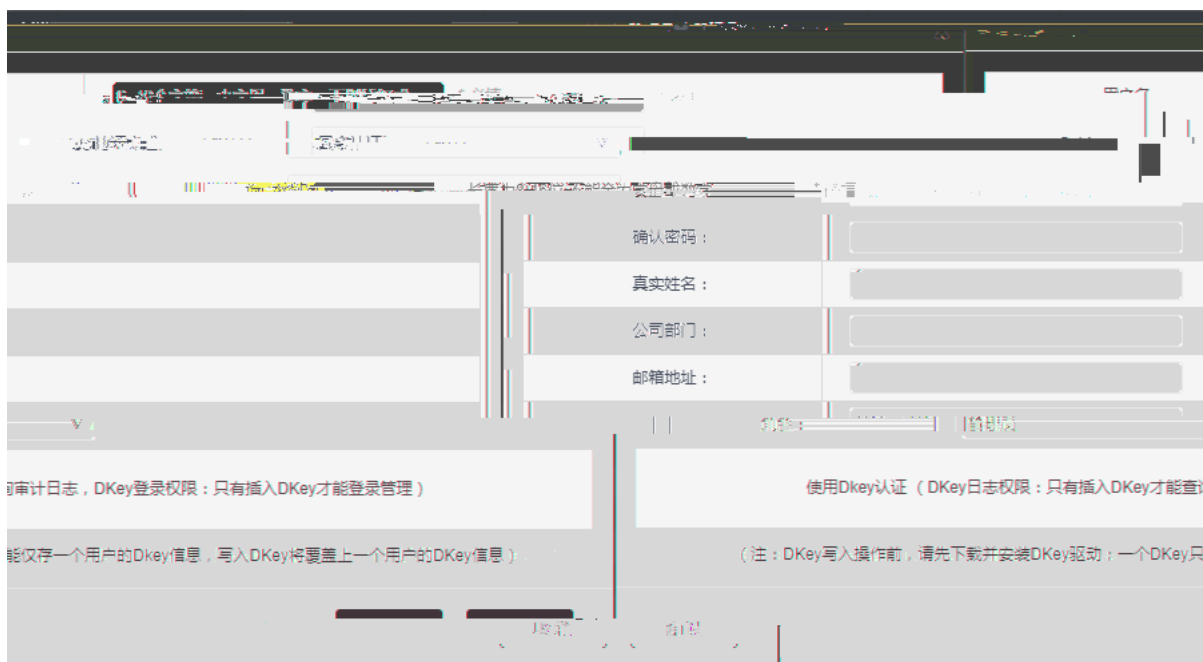

4-1



4-2





4-3

4.2



> /

/



4-4

4.3



>

4-5

```

graph LR
    WebUI --- B5[Backend 5]
    WebUI --- F5[Frontend 5]
    B5 --- F3[Frontend 3]
    F5 --- B10[Backend 10]
    F5 --- F10[Frontend 10]
  
```

新增网管策略配置

规则名:

*必填

允许网管设备的IP:

*必填

描述:

选填，长度不能超过32个字符

取消

确定

4-6

IP 192.168.1.20 192.168.1.20

IP IP

4.4

 >

IP

集中管理

内容	信息	操作
服务器IP/域名:	switch.rujiie.com *必填	确定
端口:	8080 *必填	
设备编号:	123 *必填	

4-7

IP

5

5.1

IP

IP

IP

IP

IP

>



5-1 IP

5.2



>



192.168.2.100

0.0.0.0/0

192.168.2.254

IP

web



6


6.1

RG-DDP

access

WAN

trunk

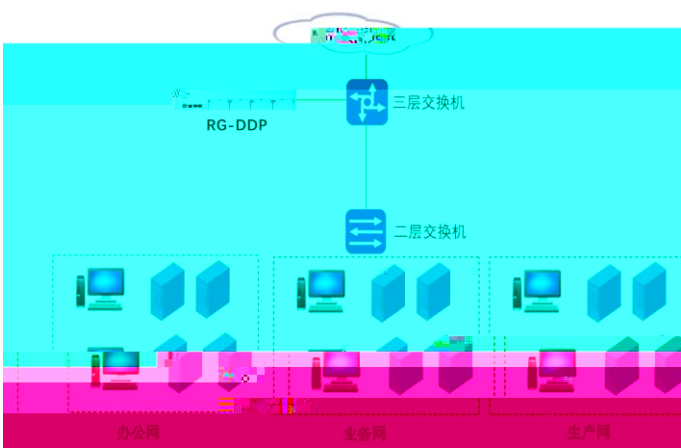

6.1.1

1. RG-DDP
2.
3.
4.

6.1.2

RG-DDP

https://192.168.1.200

https://192.168.2.200

admin

admin

RG-DDP

工作模式

确定

工作模式：

串行模式

旁路模式

间隔检测：

5

s(秒)（值：0或5-100的整数，0表示不学习）

立即学习

编辑外部IP网段配置

网段：

192.168.1.0

*必填

掩码：

255.255.255.0

*必填

网关地址：

191.168.1.1

*必填

VLAN：

0

*必填(0~4094的整数)

物理线路：

线路1

*必选

探测IP1：

192.168.1.111


*选填(必须为空闲可用IP)

探测IP2：*选填(必须为空闲可用IP)


取消

确定

VLAN	access VLAN ID 0 turnk VLAN ID VLAN ID VLAN ID 5 Ω Ω ;

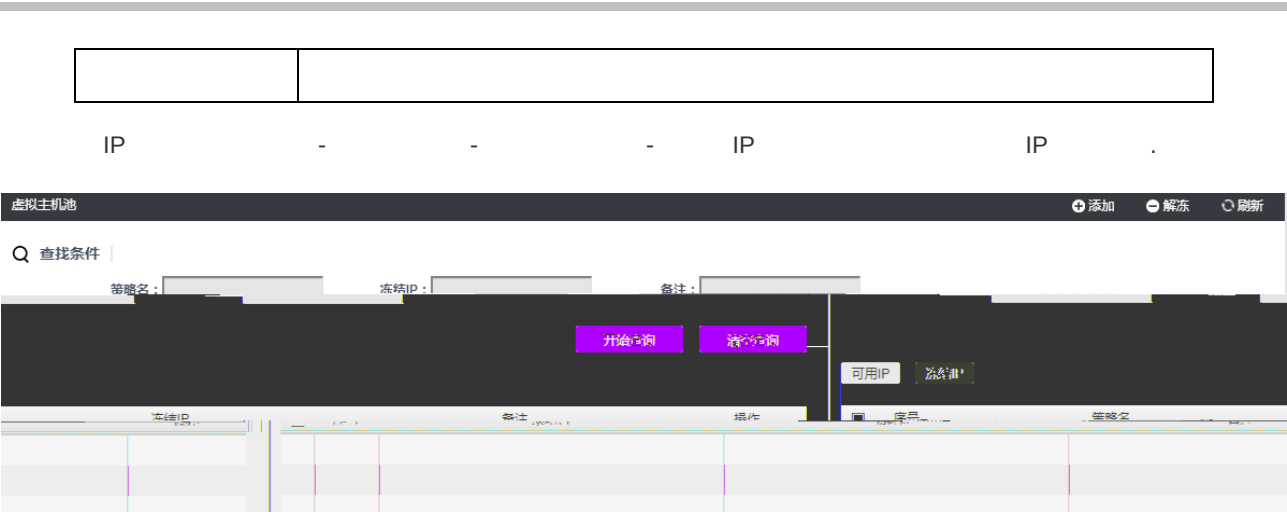

6.2

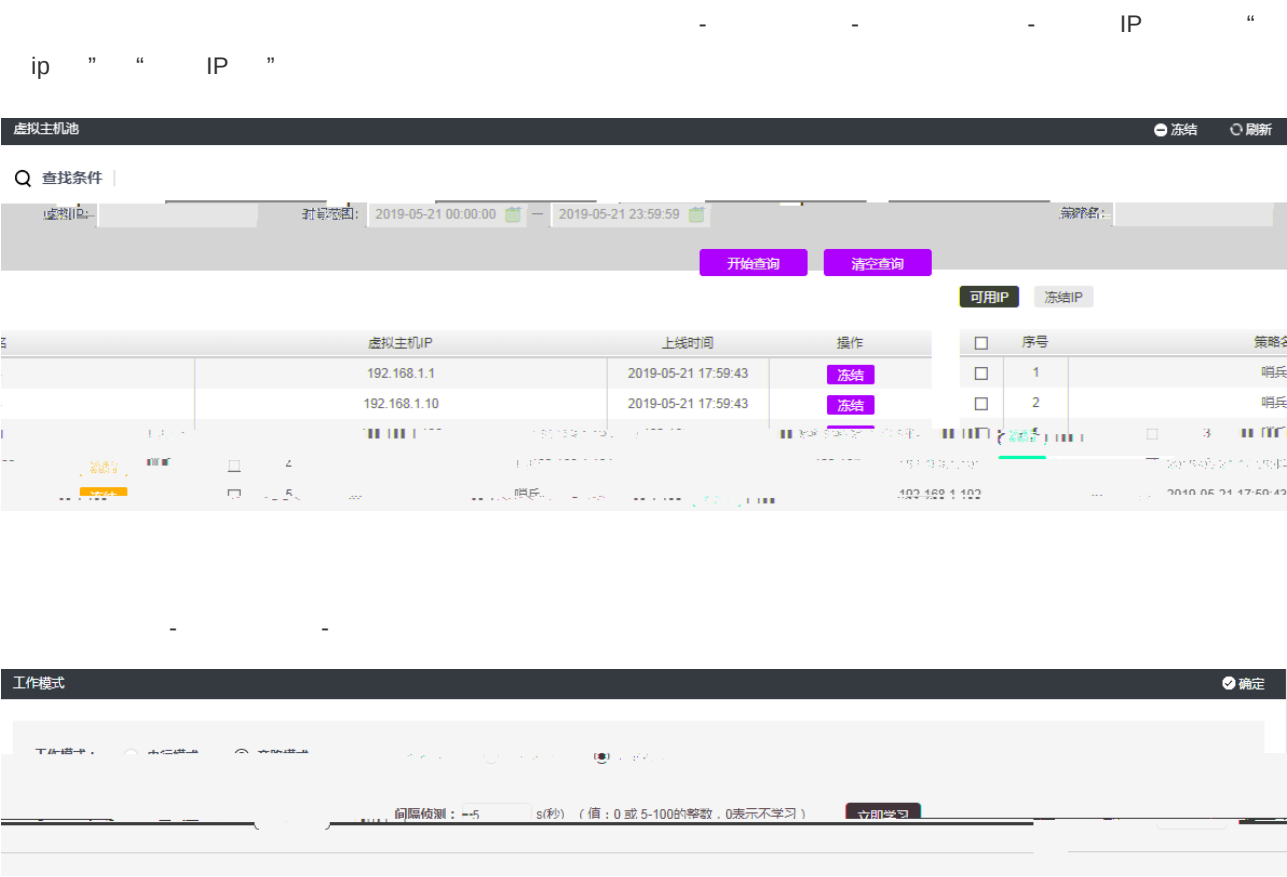

立即学习

✓ 学习成功！

确定

IP

可用IP 冻结IP

IP	名称	IP地址	冻结时间	操作	备注
2.168.1.10	2019-05-21 17:59:43	冻结	☐	2	哨兵
192.168.1.101	2019-05-21 17:59:43	冻结	☐	4	哨兵
192.168.1.102	2019-05-21 17:59:43	冻结	☒	5	哨兵

RG-DDP

IP

IP

IP

可用IP 冻结IP

IP	名称	IP地址	冻结时间	操作	备注
☒	1	哨兵	192.168.1.10	-	解冻



RG-DDP


)

(

7 RG-DDP


7.1

CPU

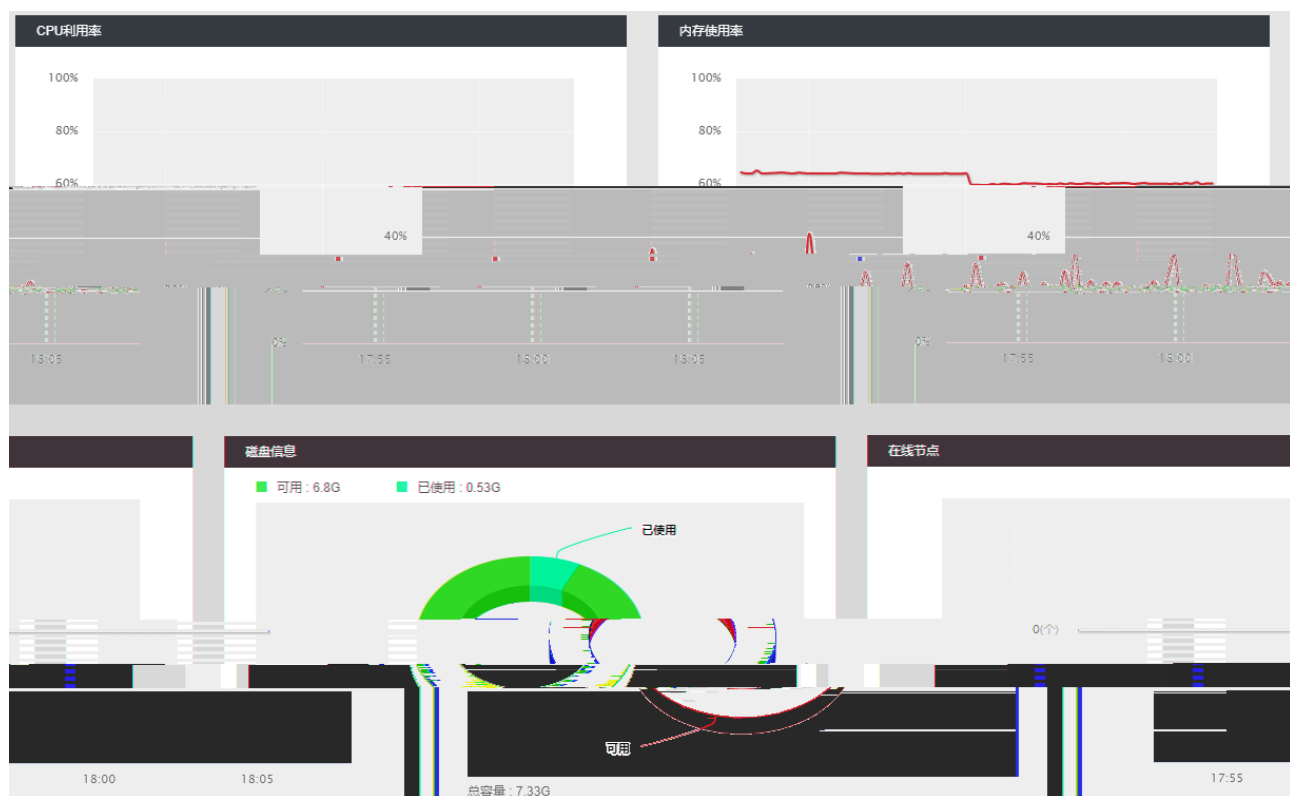

7.2

-




7.3

关机/重启

操作		操作说明	
	确定	重启/关机	☐ 重启 ☐ 关机（提示：电源延迟开关，长按5秒关机）

4		
5		



2.

- DHCP
- DNS 114.114.114.114 ()
- DNS 8.8.8.8 ()
-
- IP
-
- IP 1m
- 1m
- 4m


3. “ ”

8.1.3.2.3

1. → → IP



2. “ ”

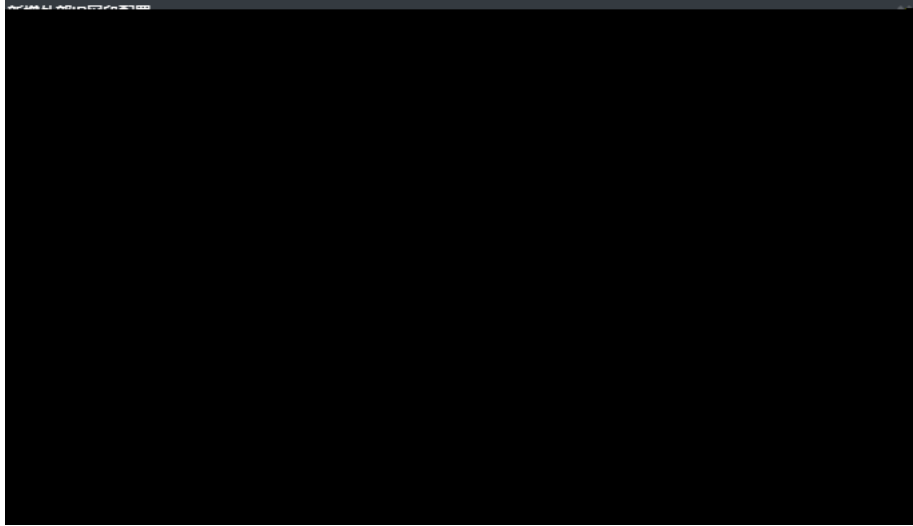

3. (IP)

1. $\rightarrow$ $\rightarrow$

新增冻结IP配置

冻结IP:

192.168.1.12

策略:

哨兵

备注:

2.

IP

VLAN

IP

VLAN

VLAN

IP

IP

8.1.3.2.7

工作模式

确定

工作模式：

串行模式

●

旁路模式

间隔侦测：

5

s(秒)

(值：0 或 5-100的整数，0表示不学习)

立即学习

8.1.4