

1

RG-SCC800	HDMI VGA

 1000Base-T	100Base-TX	10Base-T			
 RG-SCC800: POE	30W	4	60W	POE+/POE	

1.1 RG- SCC800

	RG-SCC800				
CPU	ARM Cortex-M4 120MHz, 150DMIPS				
BOOTROM	/				
Flash Memory	16MB				
SDRAM	/				
	8				
	1 console				
	6	HDMI	3	3	
	2	VGA	1	1	
	6	USB2.0	2	4	
	4		3	1	
	5	RS232	4	RS485	
	6	IO		/	IO
	4		DC12V		
	3		PDU		220V
	2				220V

RG-SCC800

2

2.1



2.1.1



2.1.2



2.1.3



2.1.4



713.26E0F370 /P <</MCID 1>B11C BT/F4 9 44C BT/F5 9 T1 0 0 1 562 9.96 760.08 Tm0.2 q673.54E

2.2.3

$\geq 0.5 \mu m$	/m ³	$\leq 3.5 \times 10^6$
$\geq 5 \mu m$	/m ³	$\leq 3 \times 10^4$

	(mg/m ³)	(mg/m ³)
SO ₂	0.3	1.0
H ₂ S	0.1	0.5
NO ₂		

10± r±& 4,3/4iPE

2-1

2.2.6

RG-SCC800



2.2.7 EMI

EMI

Ö 7Ω 2 6



4.1

4.2

--	--	--



SwitchSwitch

-5-

B


RG-SCC800

■			5	
	7			
■		7		10
■	HDMI	5		10
■				
■			B-1	
B				

-
-

D-2

B-2

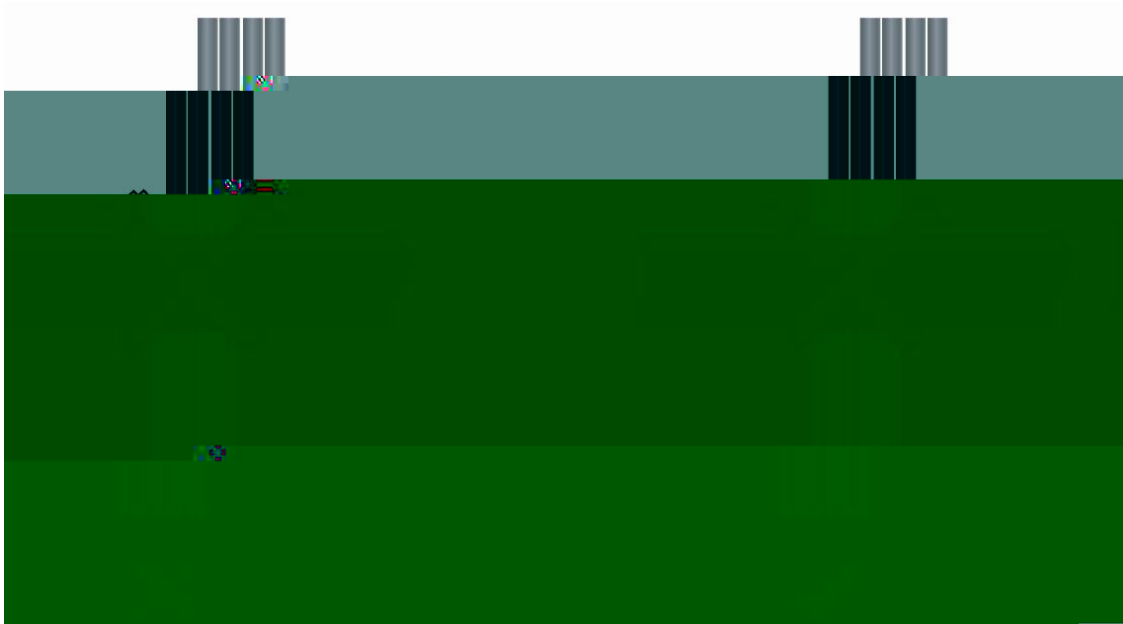

-

D-3

B-3



-
-
-

