
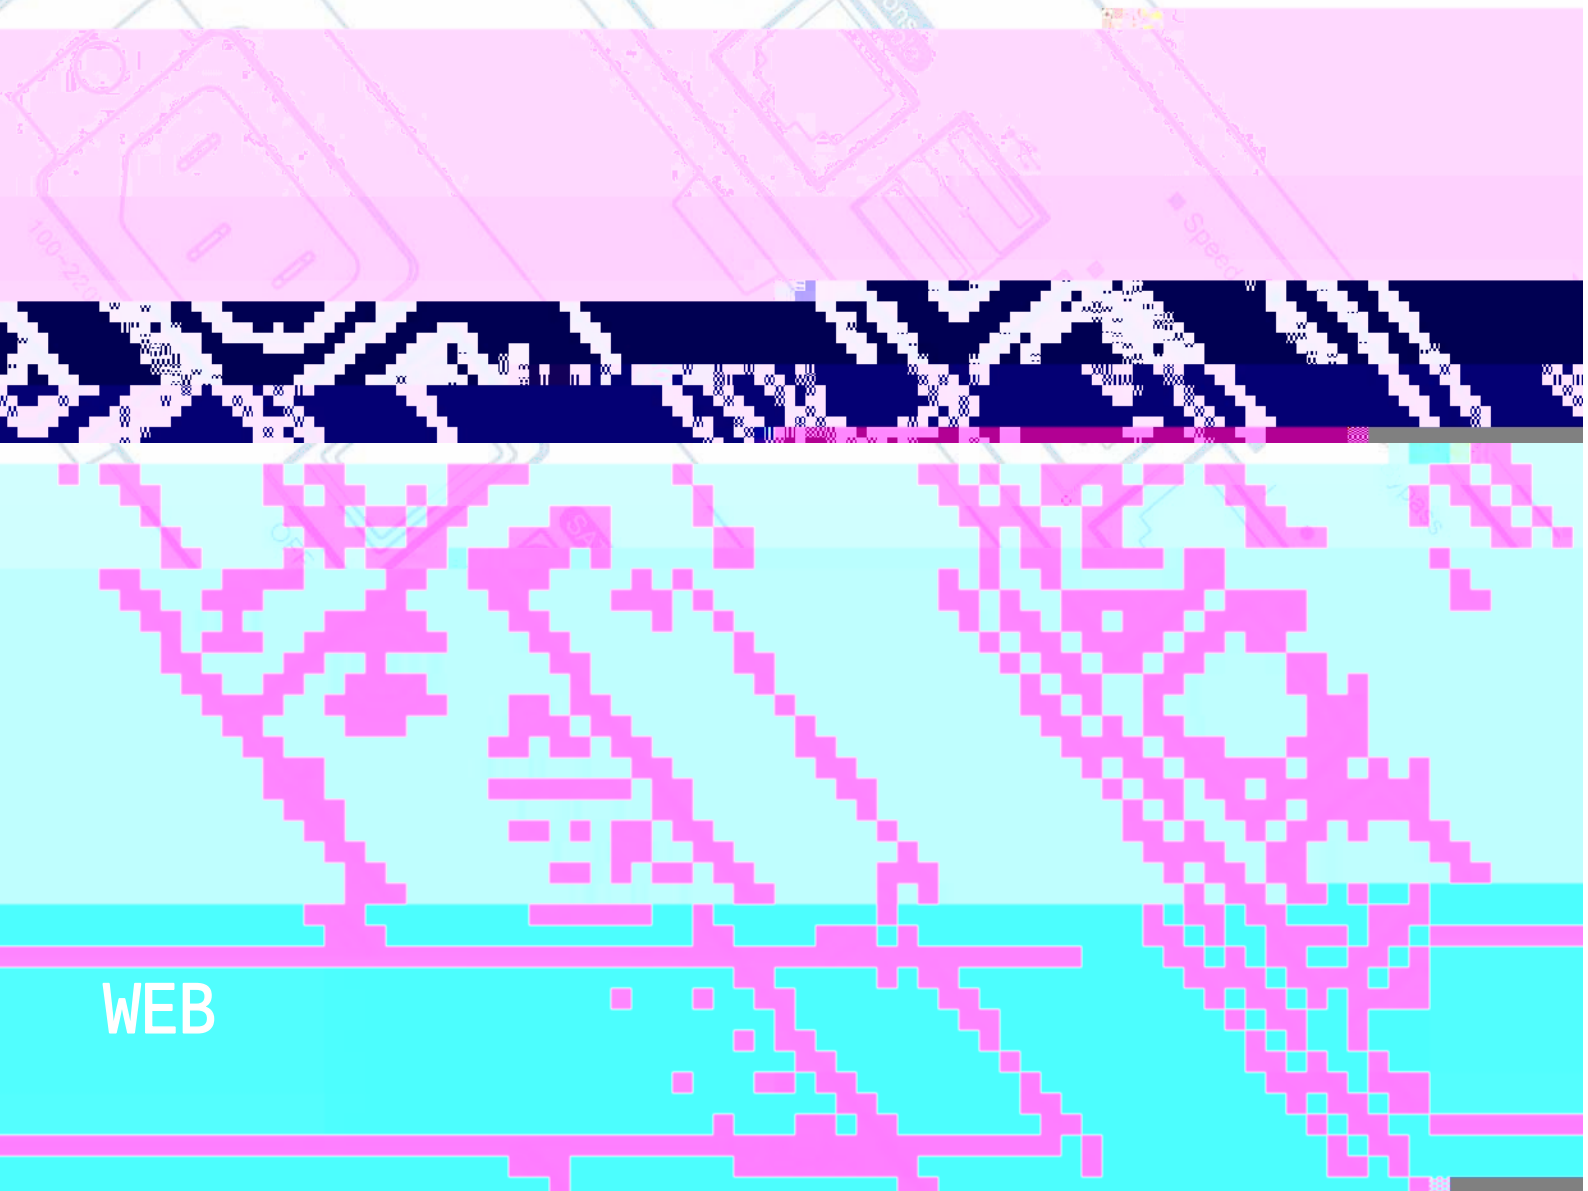




WEB

UG0EVW

V414

5354043045

<https://www.ruijiery.com/>

<https://ocs.ruijie.com.cn/?p=smb>

<https://www.ruijie.com.cn/service.aspx>

7

4001-000-078

<http://bbs.ruijiery.com/>

<https://www.ruijie.com.cn/service/know.aspx>

4001000078@ruijie.com.cn



1.

[]

[]

$\sim \{ i \mid i^{111} \}$

$[\{ i \mid i^{111}]$

22

2.




/

3.

2

2.1

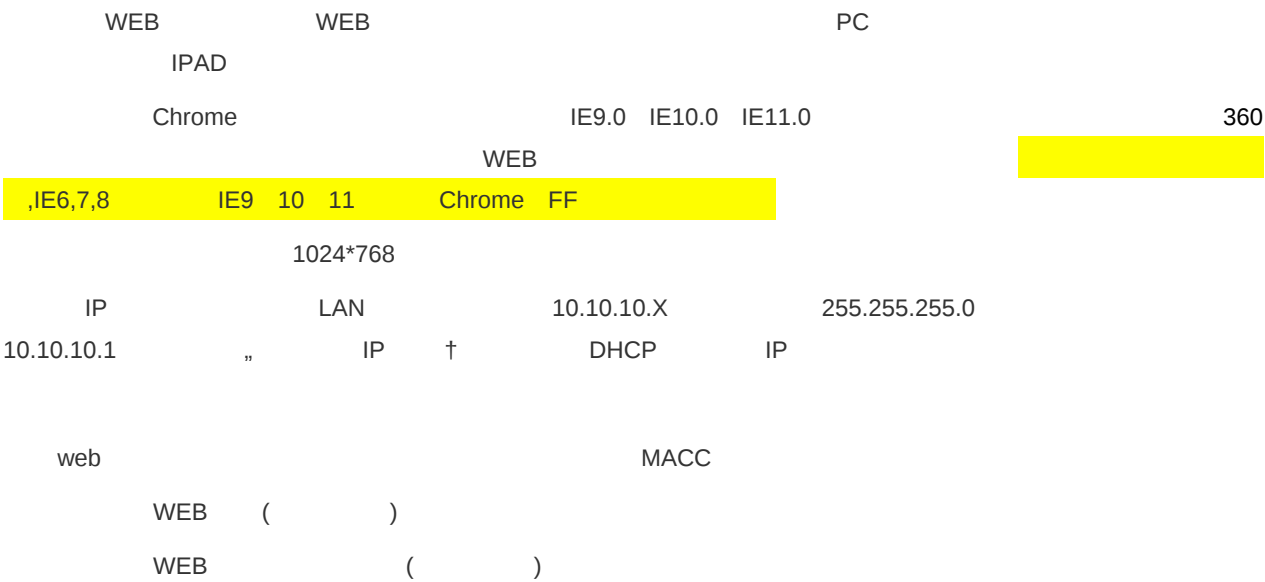


IP (LAN 10.10.10.10)

Chrome
web

10.10.10.10

web


admin

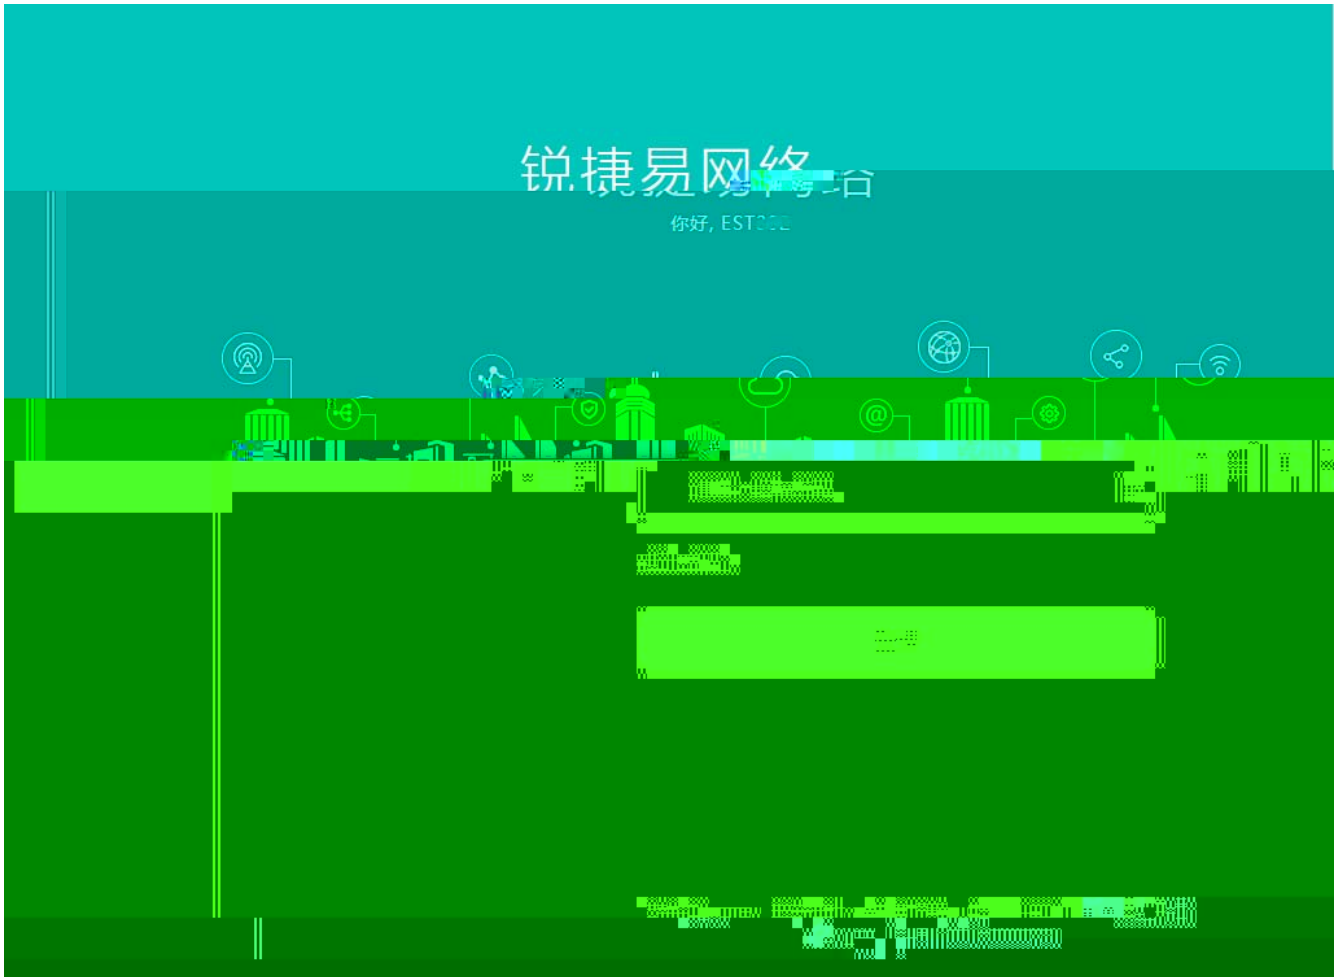

2.2

web

” †

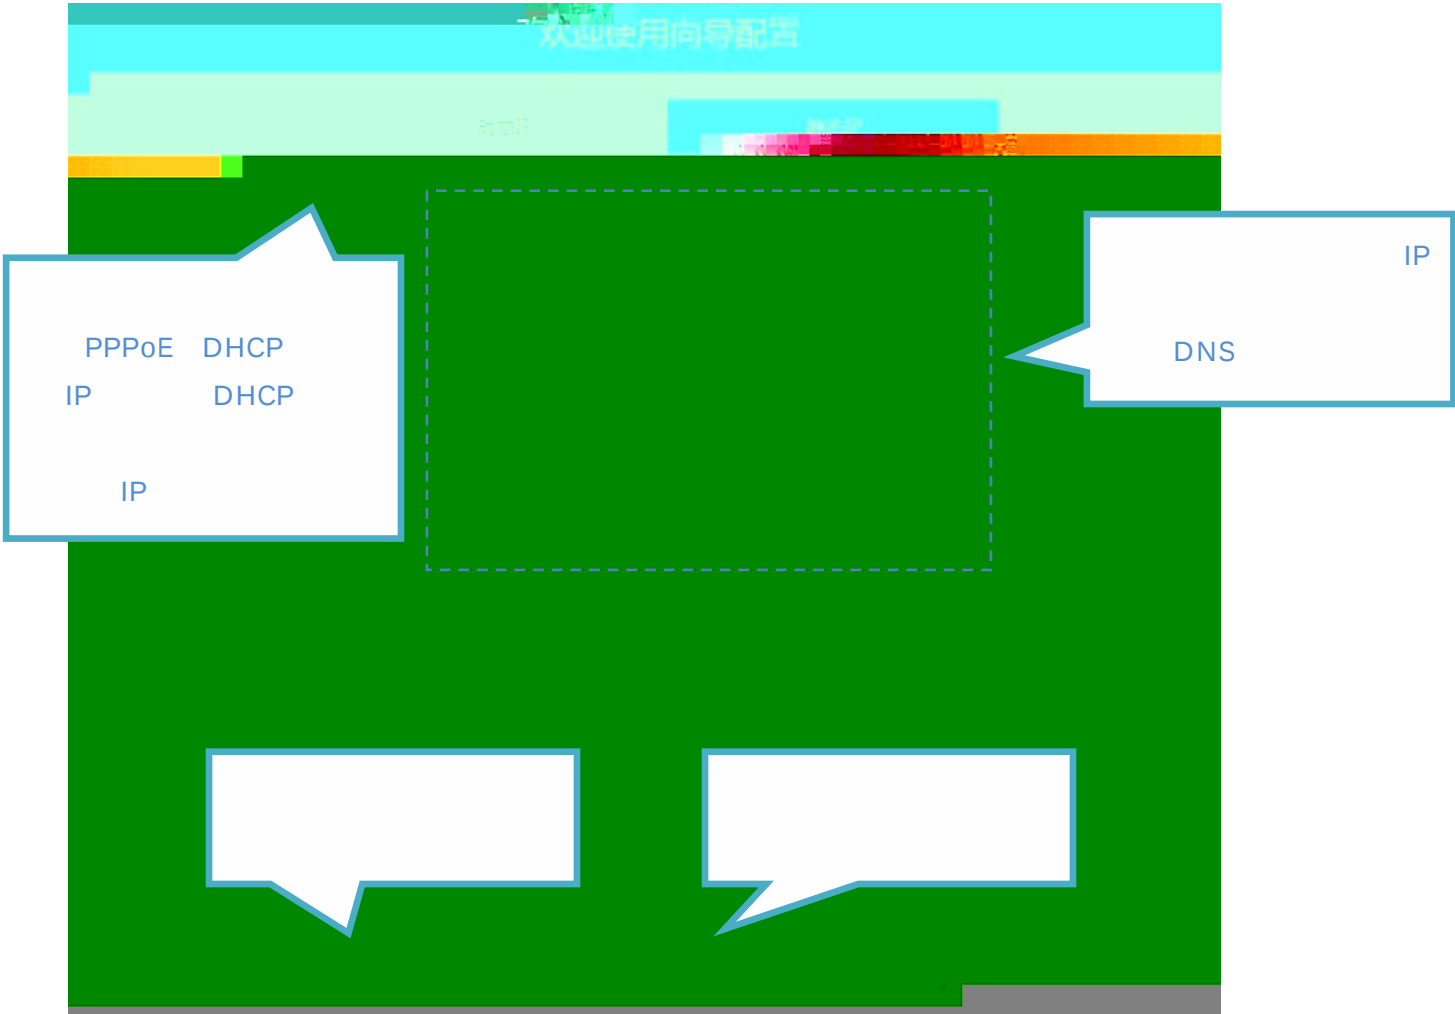


2.3 Web



APP



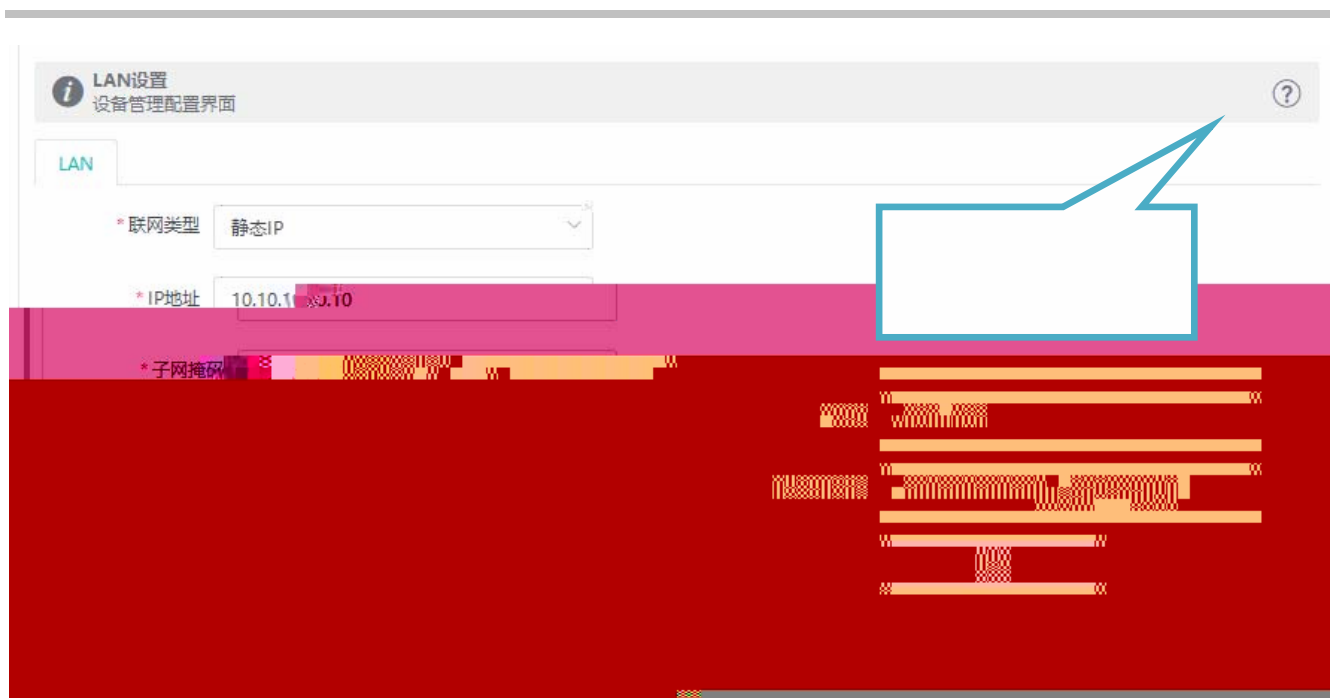

3 Eweb

3.1

The screenshot displays the Eweb web interface for a Ruijie device. The top section, titled "设备概况" (Device Overview), shows three key metrics: "内存使用率" (Memory Usage) at 47%, "桥接组总设备数" (Total Number of Devices in Bridge Group) at 2, and system information including "系统运行: 03时21分48秒" (System Running: 03h 21m 48s) and "系统时间: 2021年10月12日 19:26:44" (System Time: 2021-10-12 19:26:44). Below this, a "设备名称: Ruijie" (Device Name: Ruijie) and "MAC:" field are visible. A blue callout box highlights the "设备名称" field. The middle section, titled "桥接组信息" (Bridge Group Information), shows "锁状态: 已锁定" (Lock Status: Locked) and "设备模式: CPE" (Device Mode: CPE). A blue callout box highlights the "设备模式" field. Below this, a table lists device information with columns: "序号" (Serial Number), "设备名称" (Device Name), "关联时间" (Association Time), "RSSI", "速率(Mbps)" (Rate (Mbps)), "频段" (Band), "信道" (Channel), "状态" (Status), "角色" (Role), "MAC", and "IP". The table contains one entry with "设备名称" as "Ruijie" and "IP" as "10.10.1". A blue callout box highlights the "设备名称" and "IP" fields. The bottom section, titled "接口信息" (Interface Information), shows "接口名称: LAN1" (Interface Name: LAN1) and "接口IP: 10.10.10.11" (Interface IP: 10.10.10.11). A blue callout box highlights the "接口名称" field. The bottom right corner shows "LAN1" and "LAN2" icons with the IP address "10.10.10.11".

设备概况

内存使用率 47% ...

桥接组总设备数 2

系统运行: 03时21分48秒
系统时间: 2021年10月12日 19:26:44

设备名称: Ruijie

MAC:

桥接组信息

锁状态: 已锁定 点击 重新解锁

设备模式: CPE

序号	设备名称	关联时间	RSSI	速率(Mbps)	频段	信道	状态	角色	MAC	IP
0.	Ruijie	2021-10-12 16:								10.10.1

接口信息

接口名称: LAN1

接口IP: 10.10.10.11

LAN1 LAN2

10.10.10.11

3.2

3.2.1 LAN

LAN

IP

IP



3.3 WiFi

3.3.1

3.3.1.1 CPE



3.3.1.2 AP



3.4

3.4.1

ping


„

†




”

†

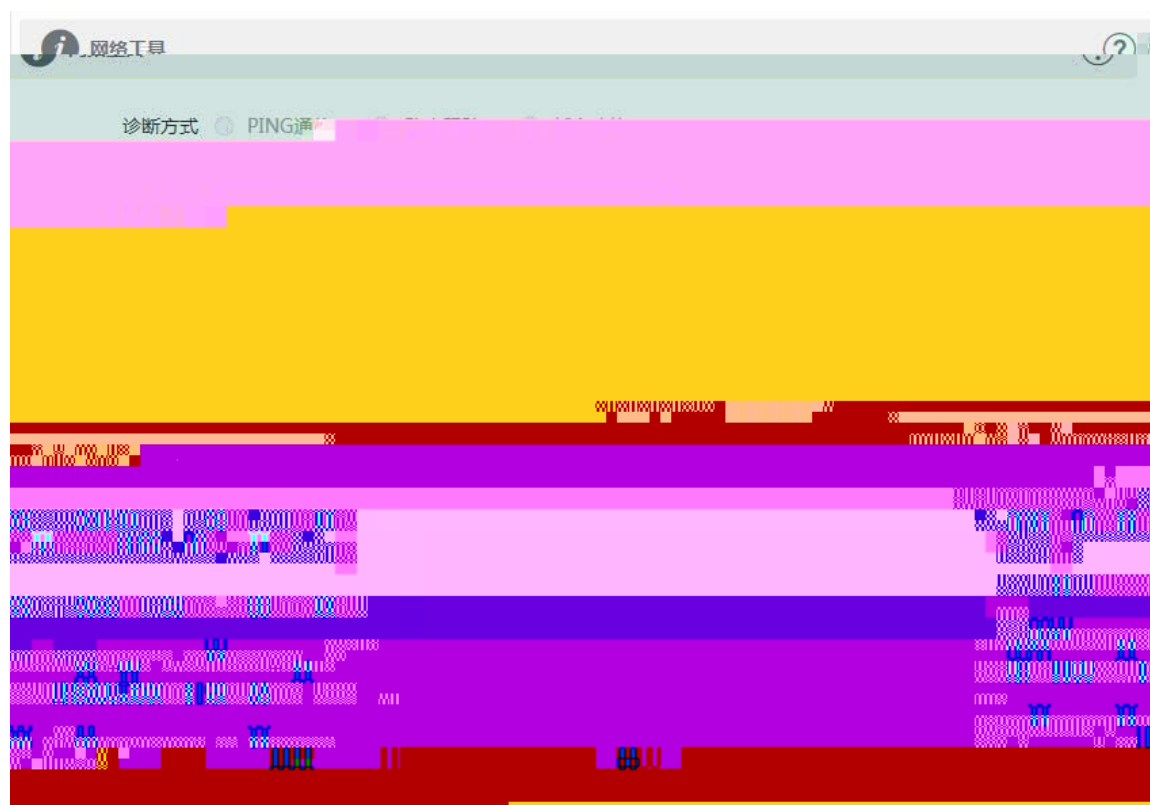

”

†

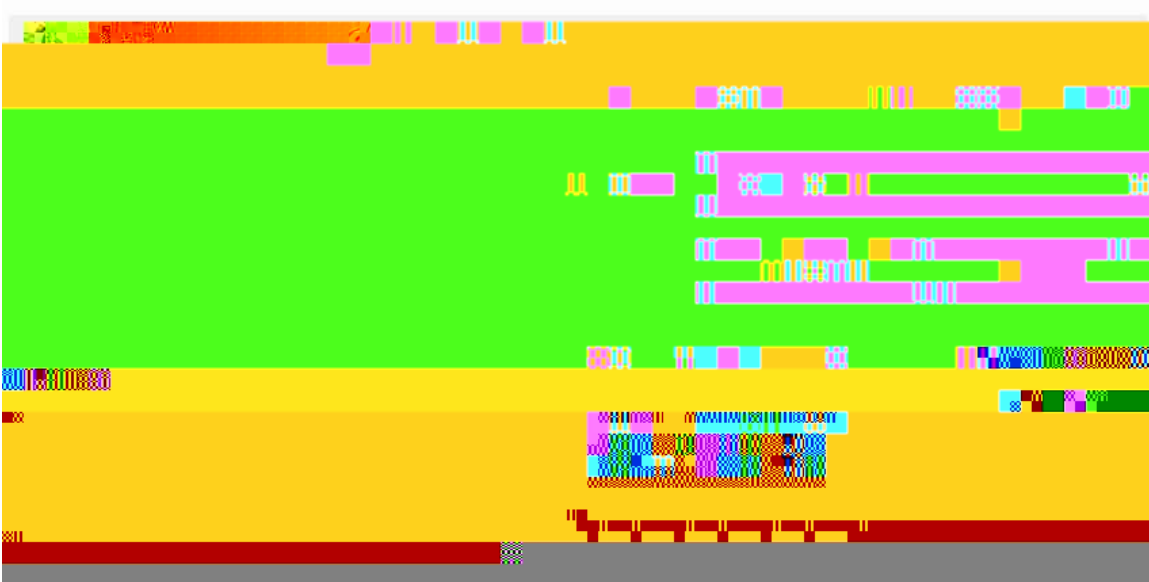

3.4.2



3.5

3.5.1

i

时间设置

查看 设置系统时间。

当前时间： 2018年04月24日 16:34:16

设置时间：☒ 网络获取时间 ☐ 手动设置时间

保存

” ↑

i

时间设置

查看 设置系统时间。

当前时间： 2018年04月24日 16:35:19

设置时间：☐ 网络获取时间 ☒ 手动设置时间

时间：

3.5.2

i

设备密码

修改设备密码

旧密码


新密码

* 确认新密码


登录器时间 3600

3.5.3

3.5.3.1

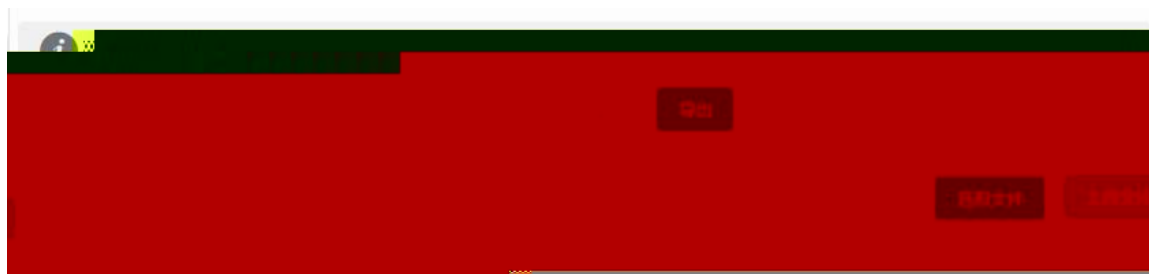

3.5.3.2

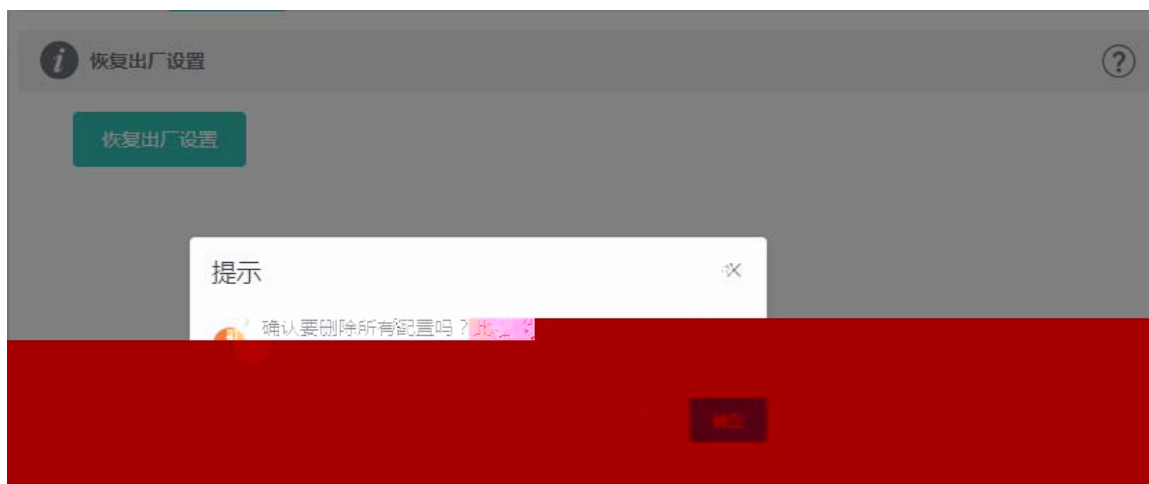

web

- ```

1) LAN
2) “
 IP ”
 DHCP
 IP
 LAN
 IP
10.10.10.10 255.255.255.0 IP 10.10.10.X , LAN IP
 255.255.255.0
3) ping
4) (admin)

```

Reset 5 Reset  
http://10.10.10.10

|   |   |               |           |    |   |                 |    |
|---|---|---------------|-----------|----|---|-----------------|----|
|   | 8 | A             | 255.0.0.0 | 16 | B | 255.255.0.0     | 24 |
| C |   | 255.255.255.0 | 32        | IP |   | 255.255.255.255 |    |