




©2013



RGOS®

RGNOS®

7 × 24

<http://www.ruijie.com.cn/>
<http://webchat.ruijie.com.cn>
<http://www.ruijie.com.cn/service.aspx>
4008-111-000
<http://support.ruijie.com.cn>
service@ruijie.com.cn

RG-WALL 1600-M5

RG-WALL 1600-M5

RG-WALL 1600-M5



1.1 RG-WAI

	254 x 432 x 44 L * W * H mm 1RU
	100-240 VAC, 50-60 Hz
	110 V / 3 A, 220 V / 1.5 A
/	35.1W/38.7 W
	119.77 BTU/h

RG-WALL 1600-M5800E

1-2

1-2 RG-WALL 1600-M5800E

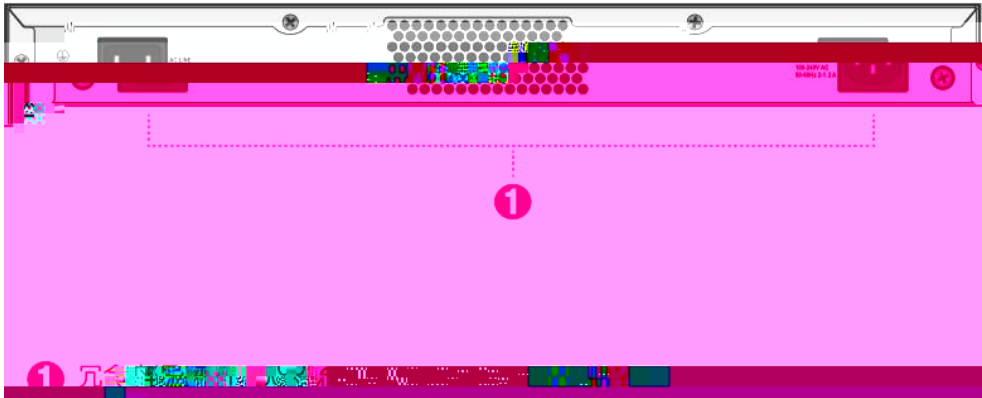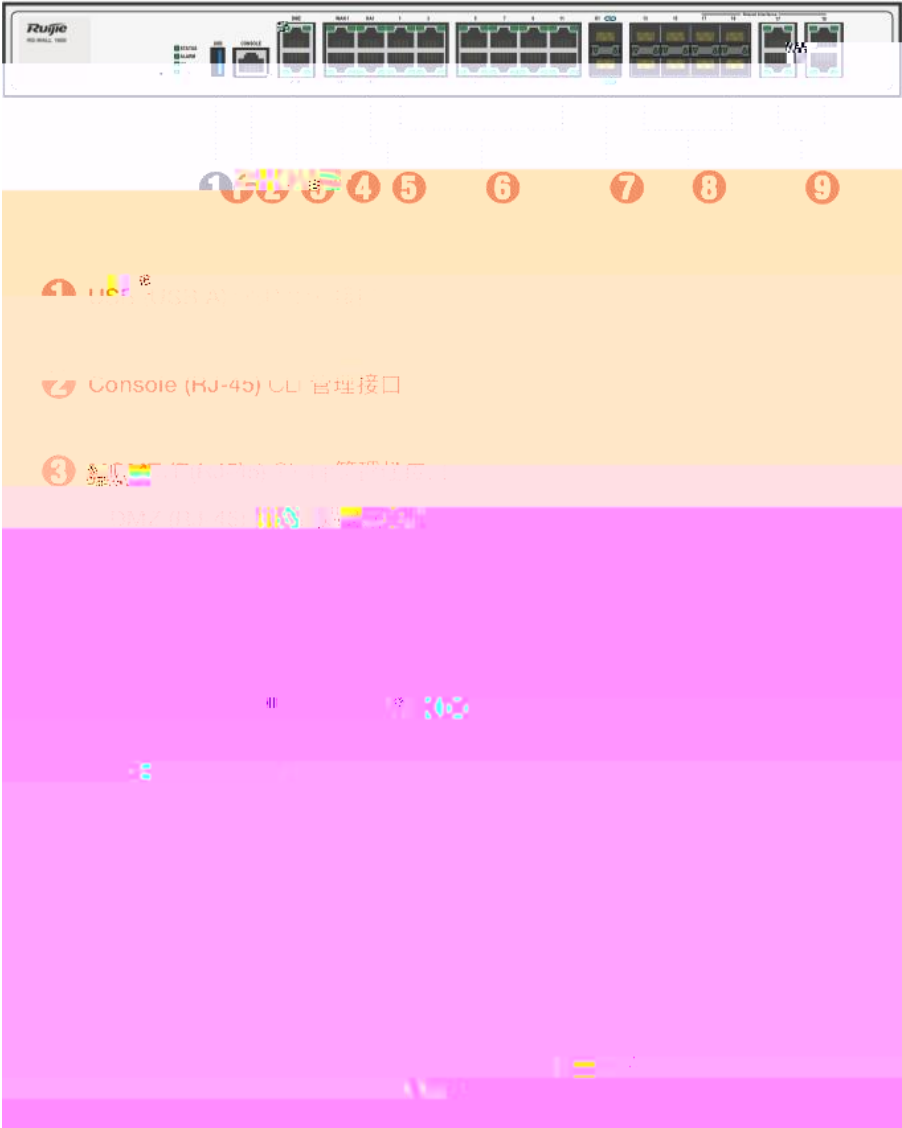

2

RG-WALL 1600-M5800E

2.1

2.1.1

2.1.2

2.1.3


2.2.3

Age Group	Percentage
18-24	25%
25-34	20%
35-44	15%
45-54	10%
55-64	5%
65-74	3%
75-84	2%
85+	1%

3

RG-WALL 1600-M5800E

3.1

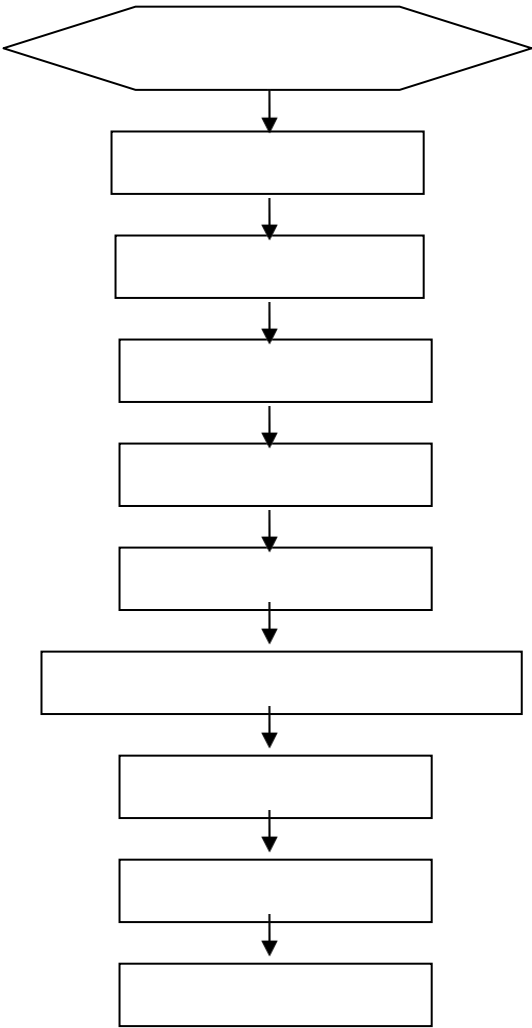

3.2

RG-WALL 1600-M5800E

3.3

5mm

1.5cm

- 1)
- 2)
- 3)
- 4)

IEC60297 19
1RU=44.45mm(1.75inch) 1RU 3-1

RU Rack Unit


WALL1600-M5800E

RU

U

RG-

3-1

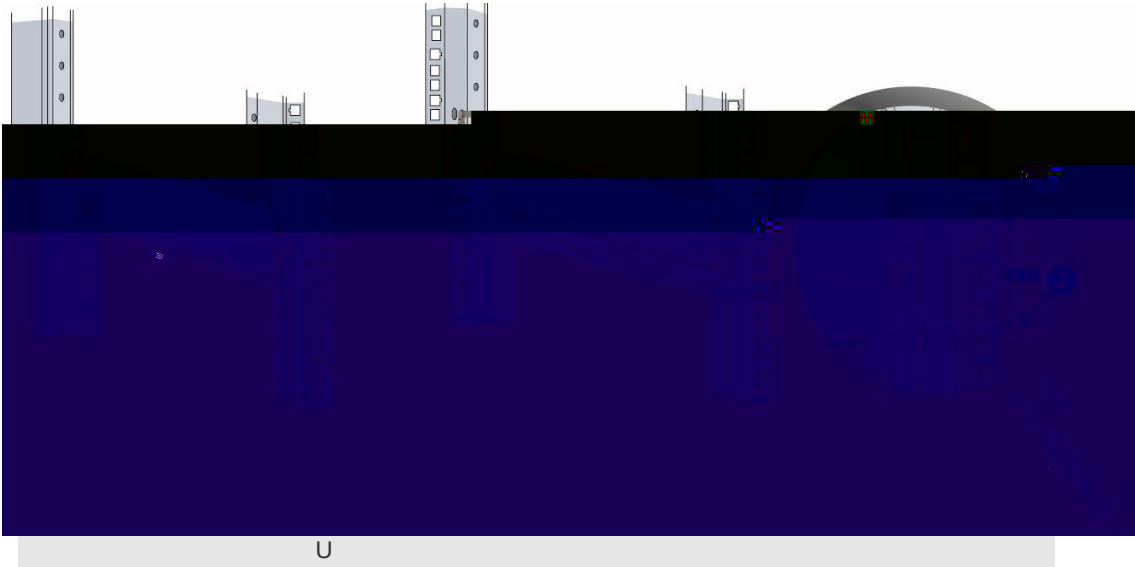

RG-WALL 1600-M5800E
M5800E

RG-WALL1600-

3.4

RG-WALL 1600-M5800E

10mm

- 1) RG-WALL 1600-M5800E
- 2) RG-WALL 1600-M5800E
- 3) RG-WALL 1600-M5800E RG-WALL 1600-M5800E

3.5

- 1)
- 2)
- 3) 16A
- 4)
- 5)
- 1)
- 2)

3 1.5 14AWG

3.6

- 1)
- 2)

- 1) RJ45
- 2) RJ45
- 3) RJ45
- 4)

3.7

- 1)
- 2)
- 3)
- 1)
- 2)
- 3)

3.8

- 1)
- 2)
- 3)
- 4)
- 1)
- 2)
- 1)
- 2)
- 3)

3.9

SFP

SFP	
SFP	
1)	
2)	SFP

3) 3-7

- 1.
- 2. SFP
- 3.
- 4. SFP

3--

4


4.1

Console

WAN1

Internet

4-1

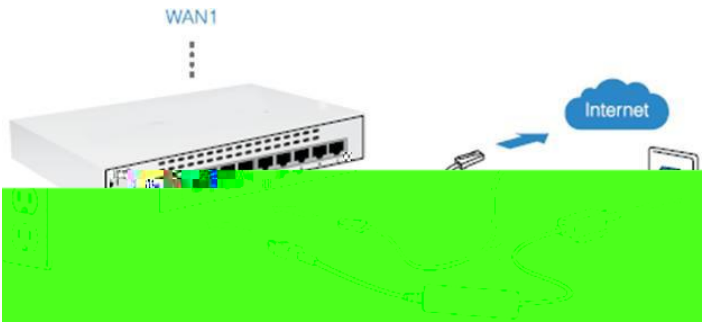

4-1


Web

LAN

PC

IP : <https://192.168.1.99>

admin

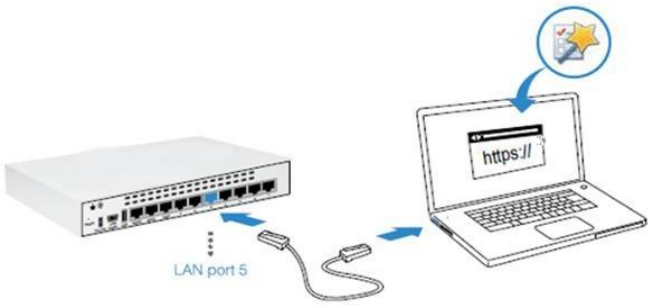

4-2

Console

PC

Console


a)

DB-9

PC


b)	RJ45	Console				
1)	PC	Console	USB	Console	Console	USB
USB						
2)	PC			"		

b) 4-5

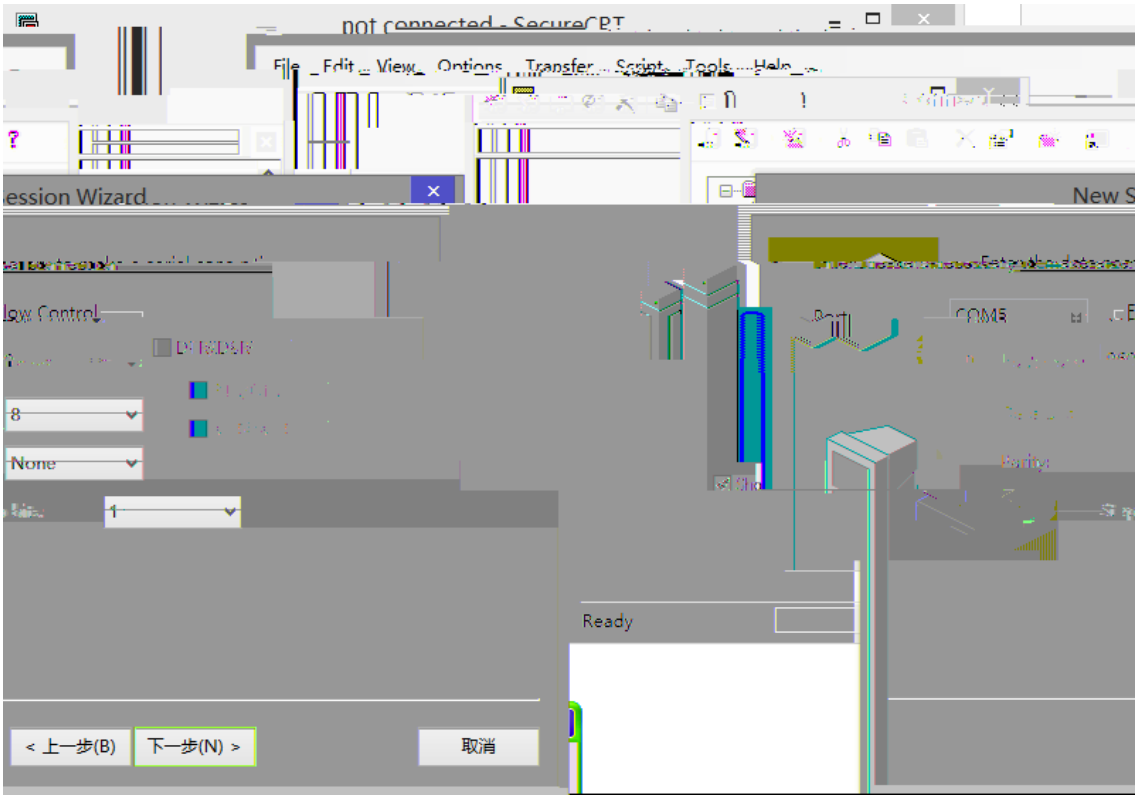

4-5

c) “ ” “ ” < > 4-6

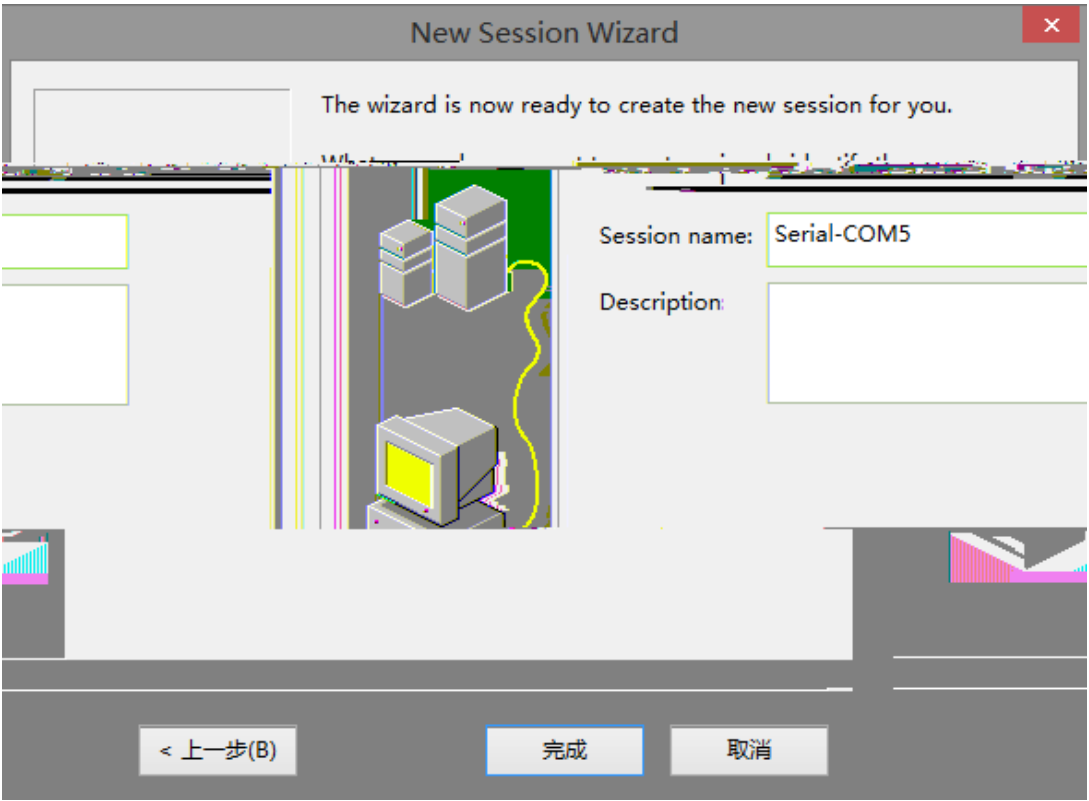


4-6

d)

< >

4-7

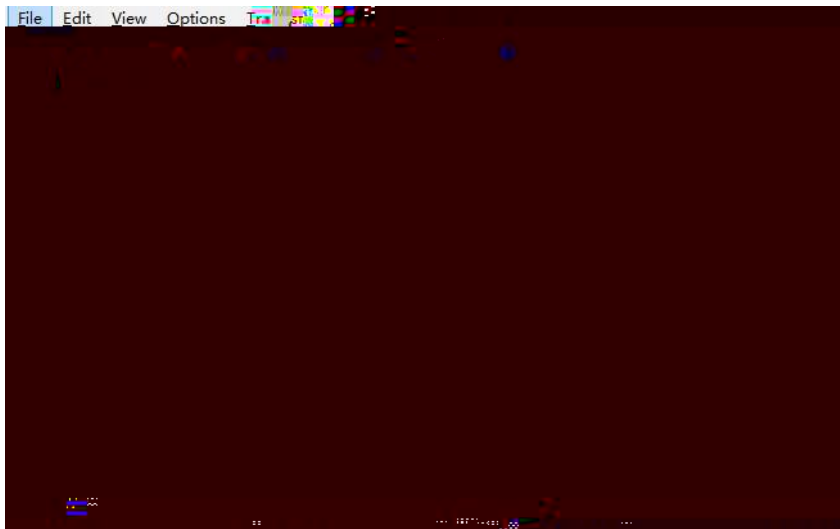

4-7

4.2

1)

2)

3)

4)

PC

1)

2)

5

5.1


RG-WALL 1600-M5800E
5-1 RG-WALL 1600-M5800E



RG-WALL 1600-M5800E

RG-WALL 1600-M5800E	RG-WALL 1600-M5800E	Internet	Telnet
RG-WALL 1600-M5800E		RG-WALL 1600-M5800E	

5.2

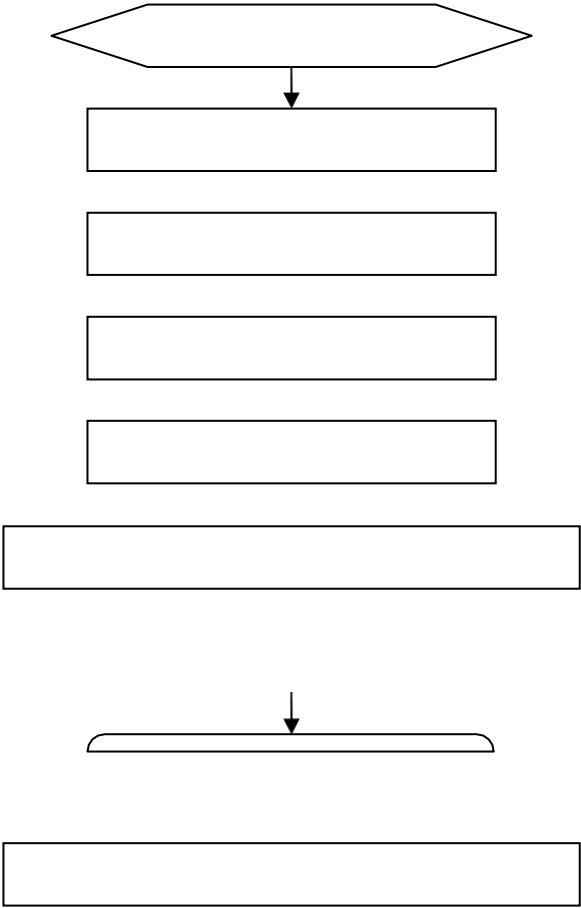

4

5 [link](#)

[link](#)

1

2 1310nm 1550nm

3

4


A —

1000BASE-T/100BASE-TX/10BASE-T

1000BASE-T/100BASE-TX/10BASE-T MDI/MDIX Crossover

1000BASE-T IEEE 802.3ab 100 1000BASE-T 4 100-ohm 5 5 UTP 4 STP 1000BASE-T

A-1 1000BASE-T

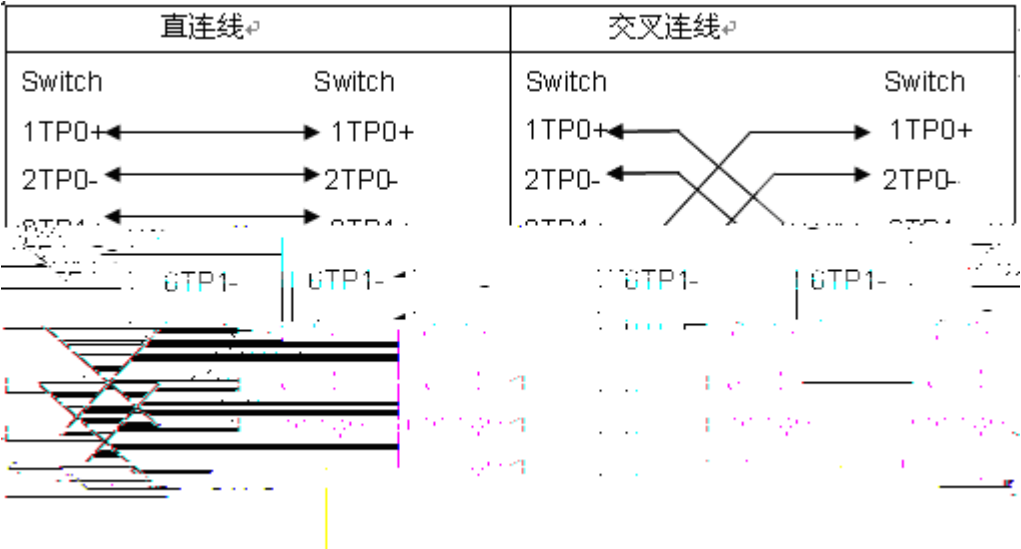

100BASE-TX/10BASE-T 100-ohm 5 100 10Mbps 100-ohm 3,4,5 100BASE-TX/10BASE-T 100Mbps

A-2 100BASE-TX/10BASE-T

Pin	插座	插头
1	Input Receive Data+	Output Transmit Data+
2	Input Receive Data-	Output Transmit Data-
3	Control Sense Data+	Input Transmit Data+
4	Control Sense Data-	Input Transmit Data-
5	Not Used	Not Used

100BASE-TX/10BASE-T

A-3 100BASE-TX/10BASE-T



16)

D-3

D-3

17)

18) 220V -48V

19)

- 21)
- 22)
- 23)
- 24)

mm	mm
10	80~150
10~30	150~200