





I





RSR10-01G     4G

I



10cm

I



4G



RSR10-01G

AC: 100~240V 50-60Hz

DC: 12V/1A

ù







WEB

RSR10-01G

console

web

PC

PC

1

PC IP

192.168.1.2~ 192.168.1.254

255.255.255.0

192.168.1.1

192.168.1.1

WEB

admin/admin

欢迎使用 RSR10-01G 路由器 WEB 管理系统

登录  
请输入您的用户名和密码！


**Ruijie**  
Networks


用户名:

密码:

[忘记密码怎么办?](#)

## Telnet

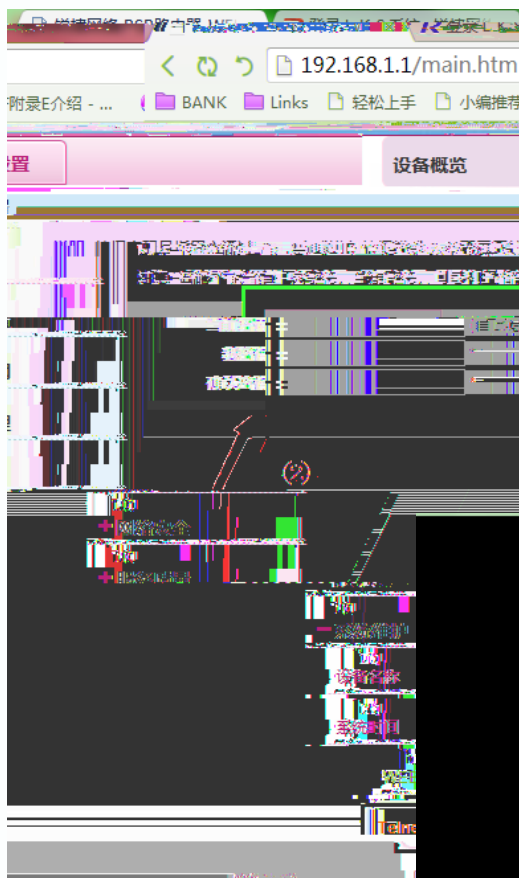

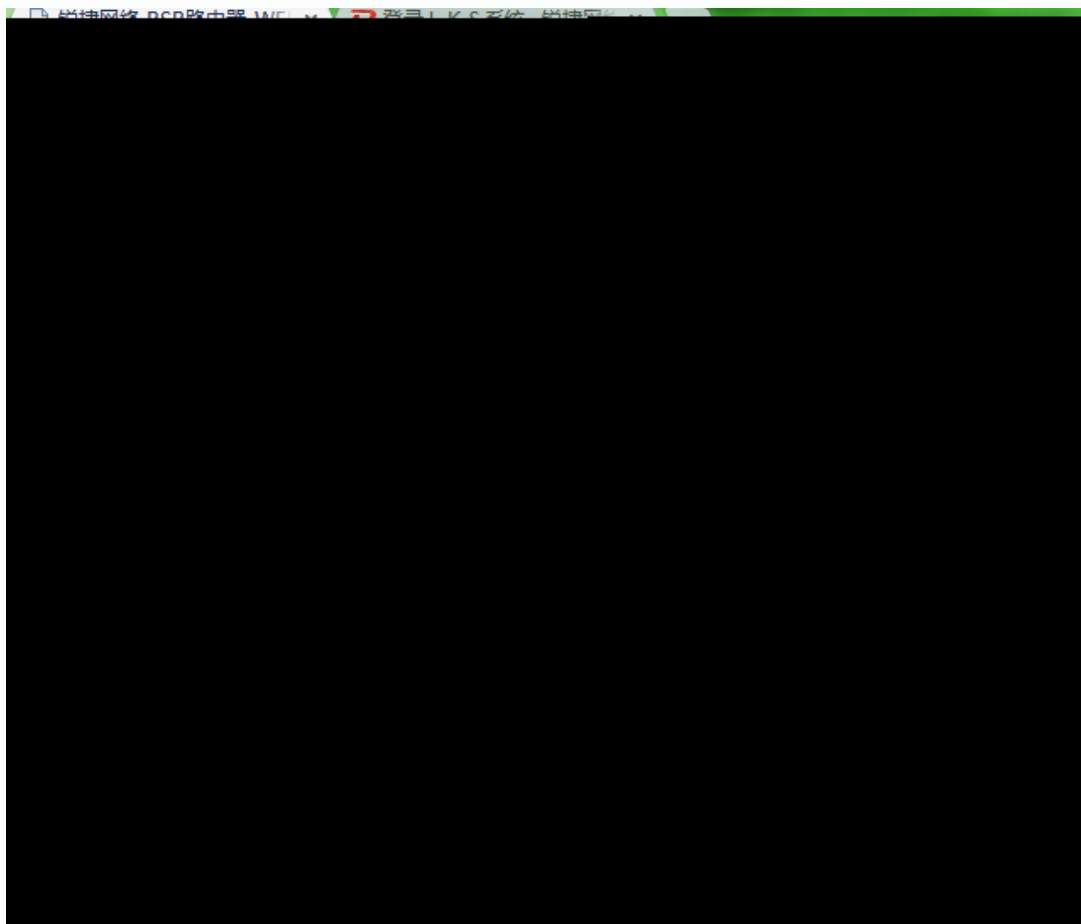






web

Telnet



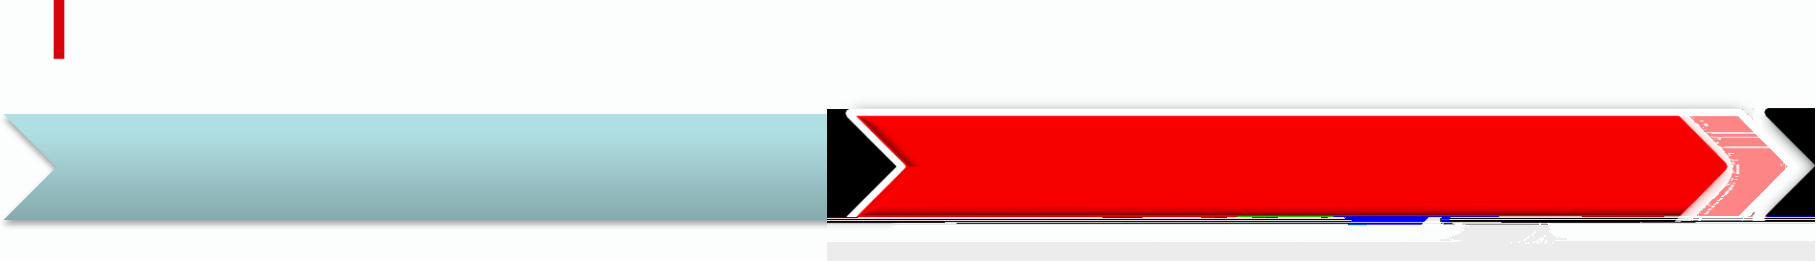

Router(config)#ip route 0.0.0.0 0.0.0.0 cellular 0/0 // 4G

Ruijie(config)#exit //

Ruijie#write // “ write ”

Ruijie#show running-config // “ show running-config ”





---

---

---

---