



--802.11ax

D

专

802.11ac 256-QAM


表

专 专

802.11ac	5GHz	802.11ax
2.4G	5G	
802.11a/b/g/n/ac		

802.11ac	MU-MIMO	
802.11ax	MU-MIMO	UL/DL

TWT Target Wakeup Time

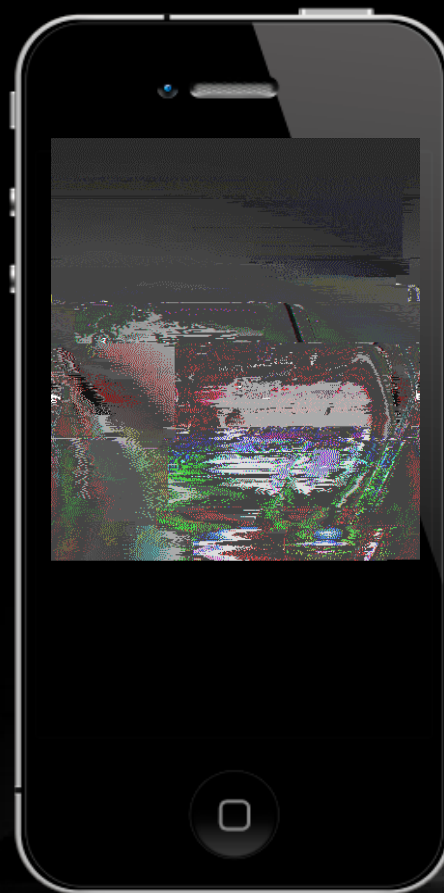



80MHz
160MHz
8

433Mbps
专 专
专 专

专

专

专

RG-AP820-A

802.11ax

2.4G



574Mbps

1.7Gbps


5G


AP

1.2Gbps

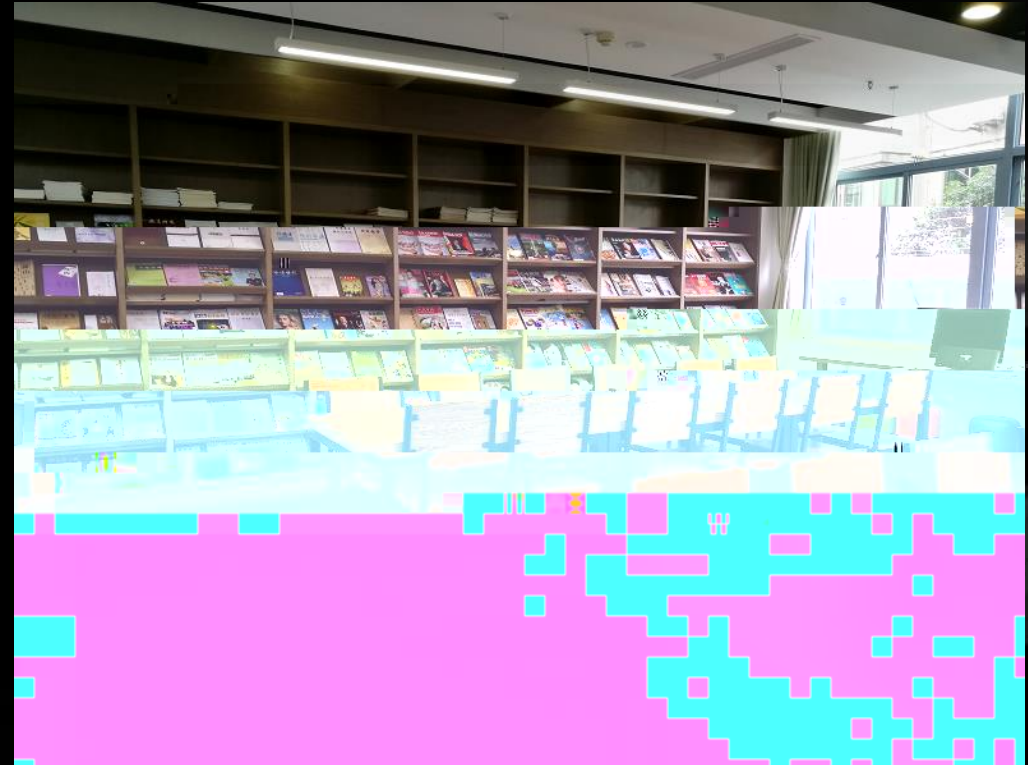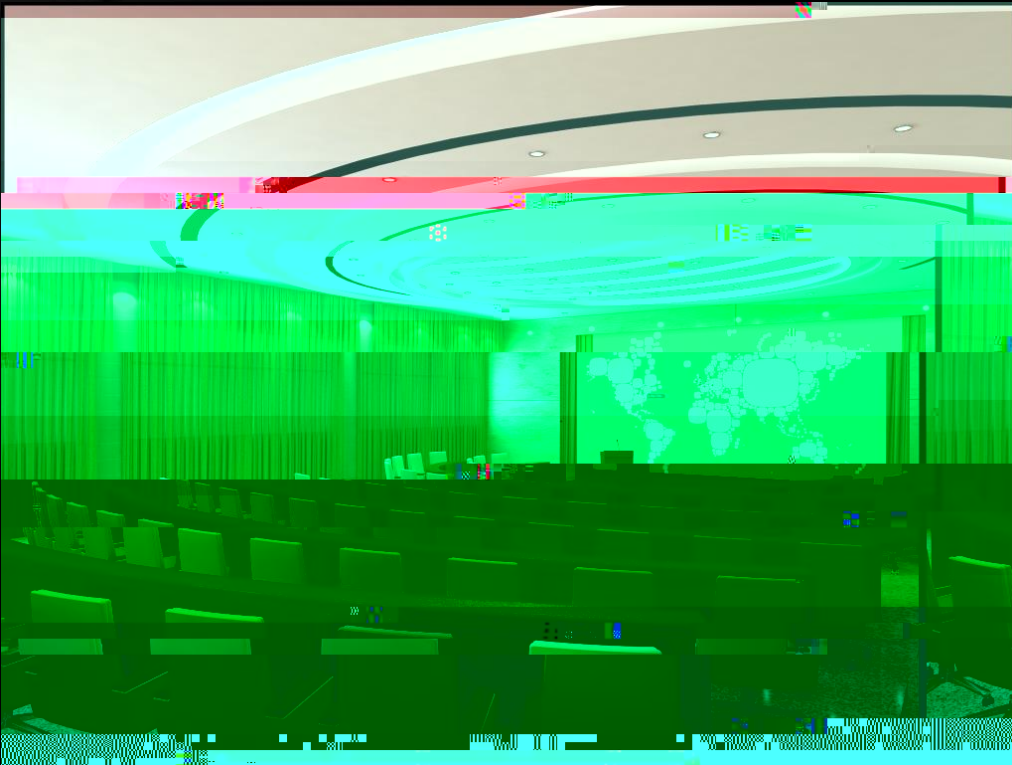

转

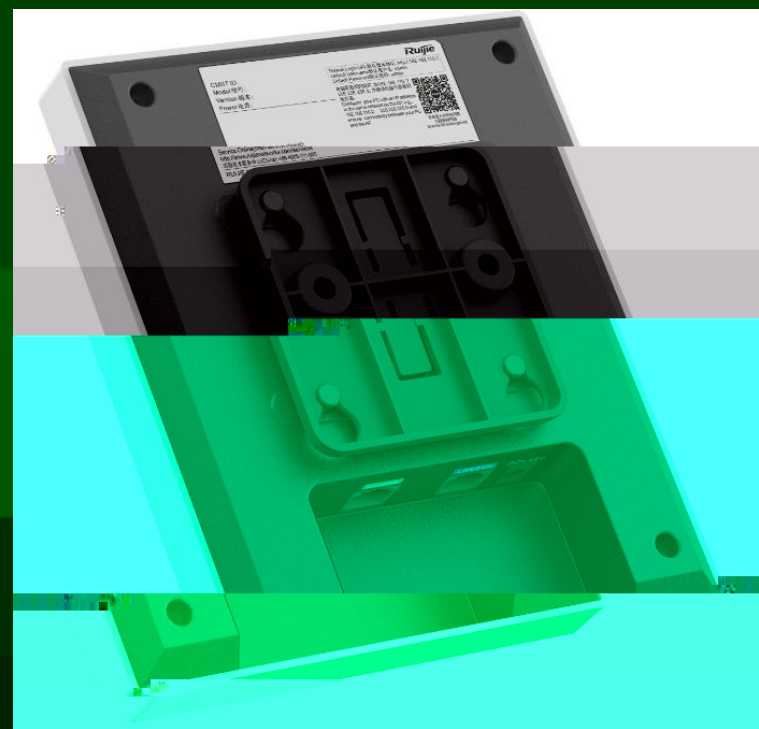

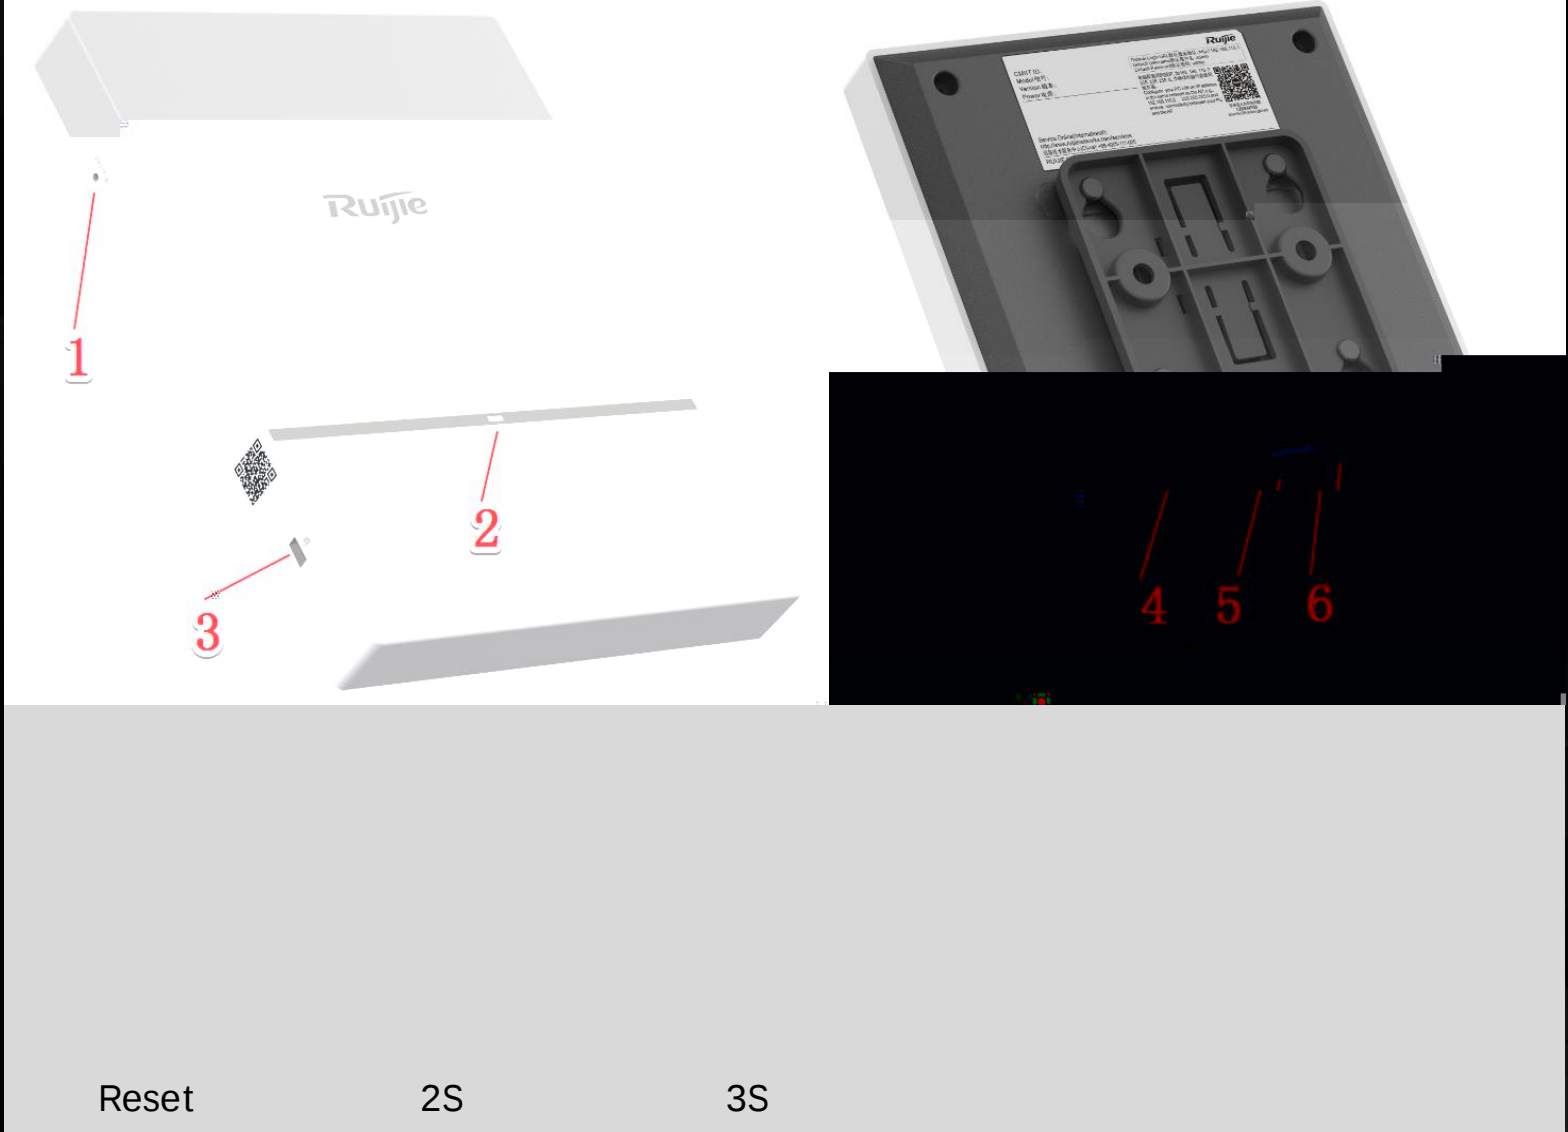

转

[illegible]

[illegible][illegible]



AP820-A








802.3af PoE


- 输入电压：DC48V，额定电流：0.3A ↵
- DC 适配器接头规格：↵

内直径↵	外直径↵	插入深度↵	极性↵
2.1mm↵	5.5mm↵	10mm↵	内正外负↵

↵

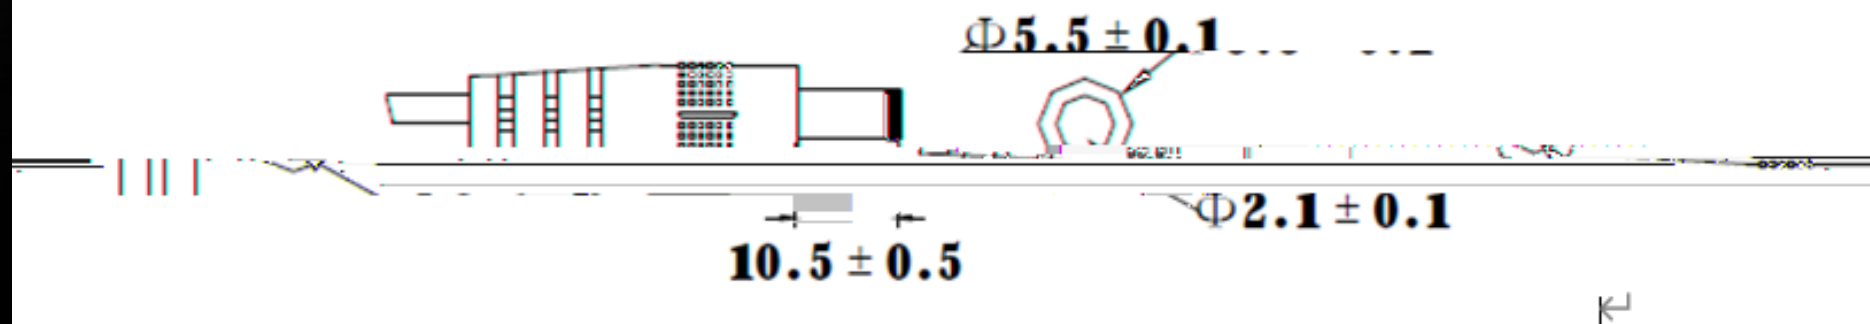

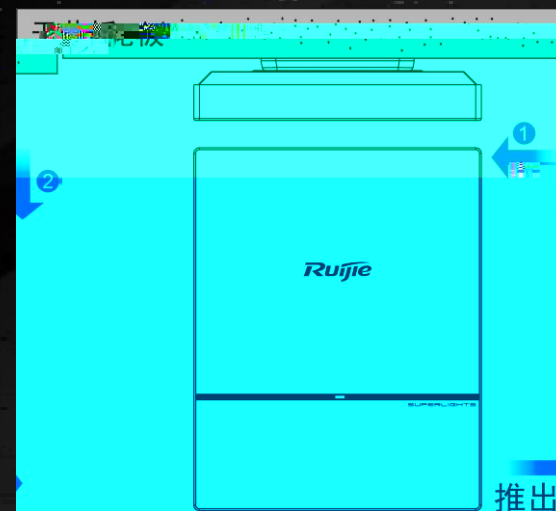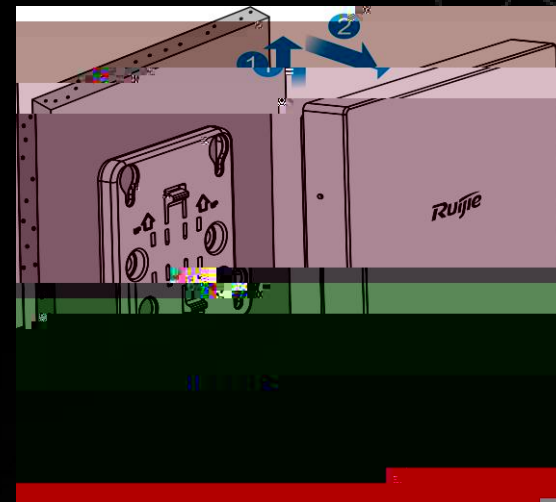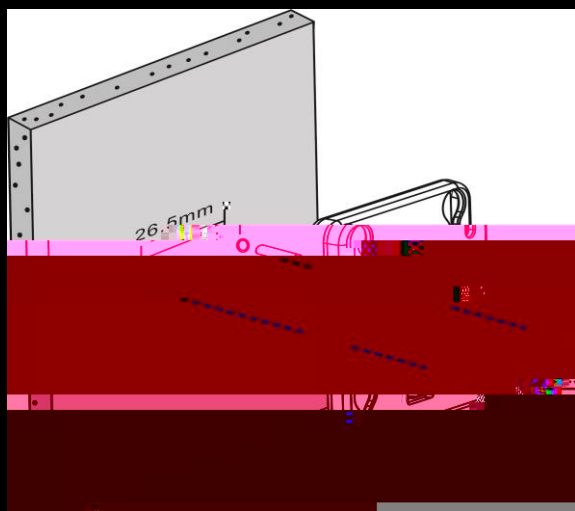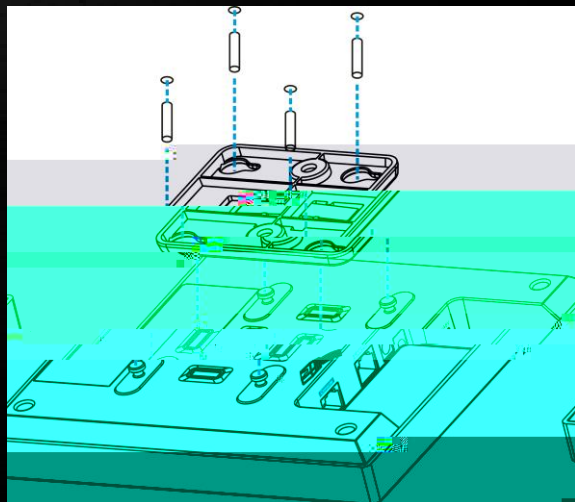

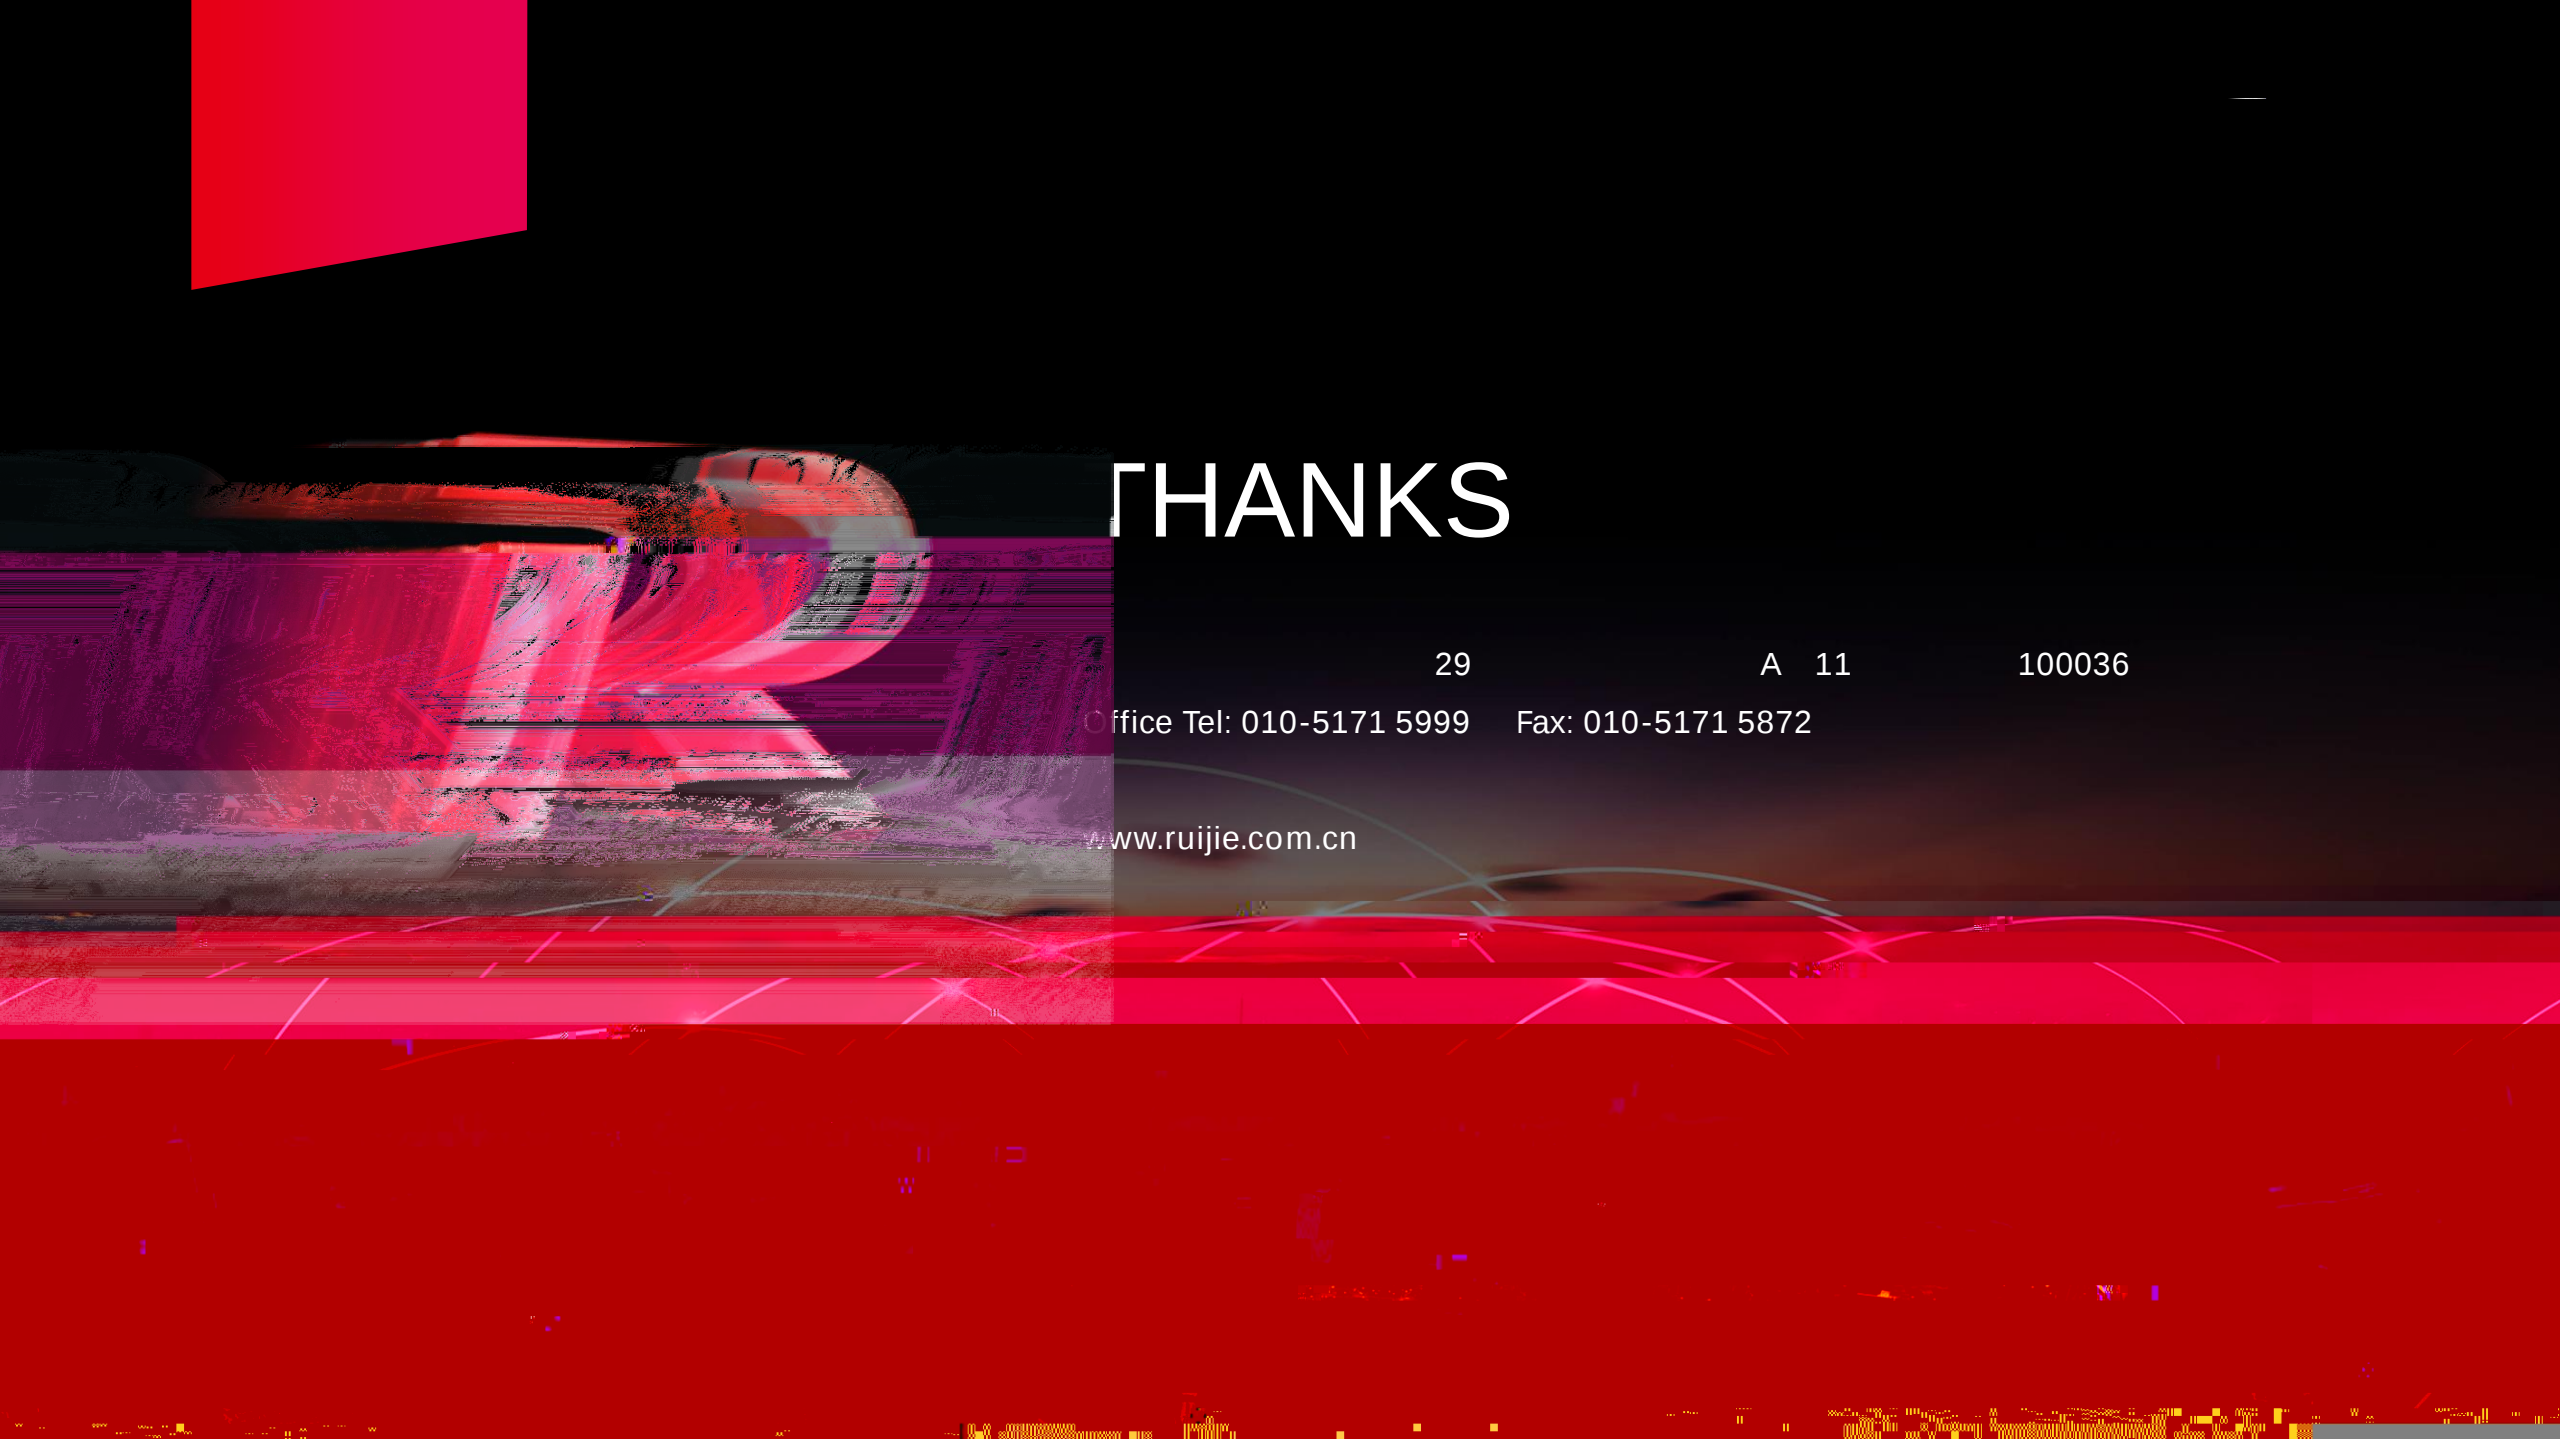

THANKS

29

A 11

100036

Office Tel: 010-5171 5999 Fax: 010-5171 5872

www.ruijie.com.cn