

RG-S6010

V1.1

2022-0 -

copyright © 2022 ǎ ǎ ǎ

- $\lambda \wedge \gamma$
- λ
- $\lambda \wedge \gamma \wedge \tau$

- ᠠᠵᠤᠨ ᠠᠵᠤᠨ 1 <http://www.ruijie.com.cn>
- ᠠᠵᠤᠨ ᠠᠵᠤᠨ 1᠐ ᠰᠢᠨ ᠠᠵᠤᠨ <http://www.ruijie.com.cn/fw/>
- ᠠᠵᠤᠨ 7*24h ᠠᠵᠤᠨ ᠠᠵᠤᠨ <http://ocs.ruijie.com.cn>
- ᠠᠵᠤᠨ 7*24h ᠠᠵᠤᠨ 4008-111-000
- ᠠᠵᠤᠨ ᠠᠵᠤᠨ ——— ᠠᠵᠤᠨ <http://www.ruijie.com.cn/special/fw/tool/xryf/>
- ᠠᠵᠤᠨ ᠠᠵᠤᠨ 4008111000@ruijie.com.cn
- ᠠᠵᠤᠨ ᠠᠵᠤᠨ 6 ᠠᠵᠤᠨ doc@ruijie.com.cn



'OAPP



à 'O

1.

$$\tau \quad \gamma \quad \cdot \quad \% \quad \uparrow \quad \sim \quad "H \quad \gamma \quad = \quad \vdash \quad \boxed{\text{OBJ}} \quad A \quad \% \quad \boxed{\text{OBJ}}$$




/

2.

~ [06]

ó

✓

1

¶

¶

ǎ

7 [06]

v

1

RG-S6010

 $\bar{U}$

4

IPv6

영양

0

T

RG-S6010

1

2	10G SFP+	1000B
	0	

	GB 4943.1				
	0 to 50°C				
	-40 to 70°C				
	10%	90% RH			
	8.3KG		2		
	450 * 440 * 44	L * W * H	mm	1RU	

RG-S6010-48GT4XS

- 2


1+1
- 1

1


3

2+1

1-1 RG-S6010-48GT4XS

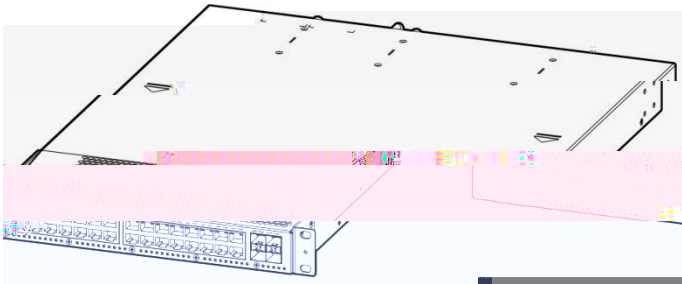

1-2 RG-S6010-48GT4XS


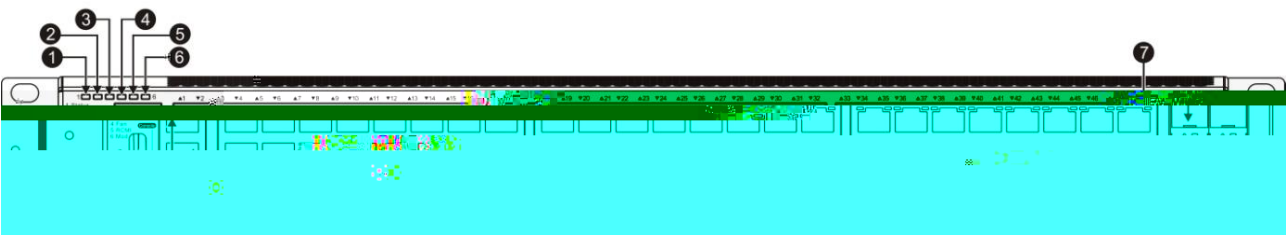


	10G SFP+	o
PWR1	USB2.0	o
PWR2	10/100/1000Base-T RCMI	o
	Console	
RCMI		o
↓		

RG-S6010-48GT4XS	10G SFP+	1G SFP	10G SFP+	1G SFP
------------------	----------	--------	----------	--------


 RG-S6010-48GT4XS

1-3 RG-S6010-48GT4XS

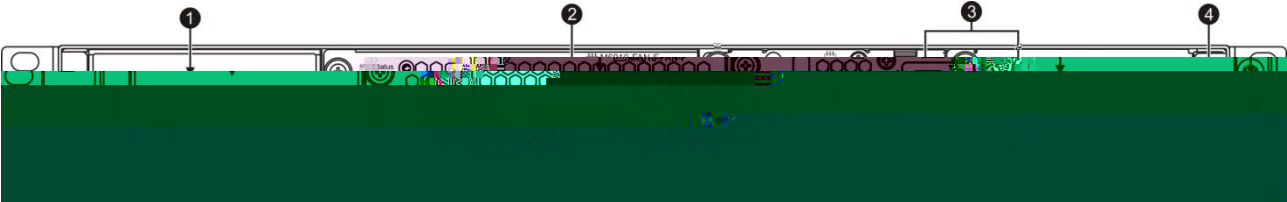

RG-S6010-48GT4XS
Ÿ (ĩ) , ĩ

1-4 RG-S6010-48GT4XS

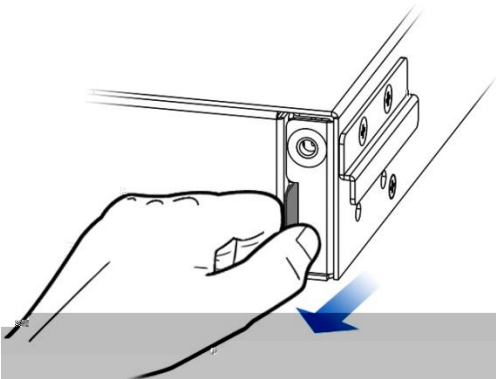

RG-S6010-48GT4XS

■ USB ¼ ○ Universal Serial BUS ○ ~ USB
Ÿ ĩ



USB

USB

USB

USB



USB

FAT32

U



Console



RS-232




RJ45



10/100/1000M RJ45



RJ45



RG-S6010-48GT4XS

~

RG-M6010-AC150-F

~

Ü



RG-S6010-48GT4XS

1

1

1

1



1

RG-S6010-48GT4XS

0


50

~

~

3

1-6 M6010-FAN-F

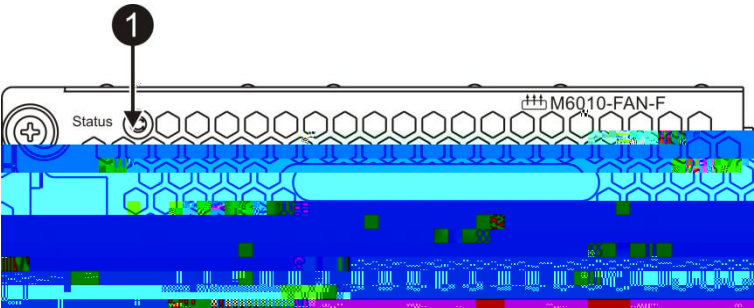

Status

			Ÿ
	Status		

~	M6010-FAN-F
	90CFM
	25000RPM
w	40W
	0.56KG
	256.8* 140.5 * 41. L * W * H mm


1.2.2 RG-M6010-AC150-F

RG-M6010-AC150-F RG-S6010


RG-M6010-AC150-F ~ Ÿ,

1

1-7 M6010-AC150-F

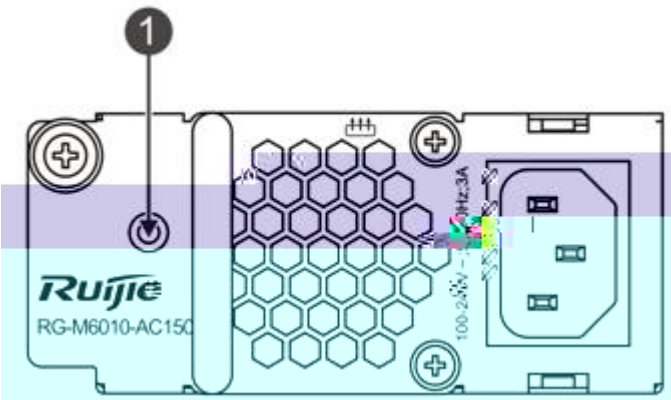

Status

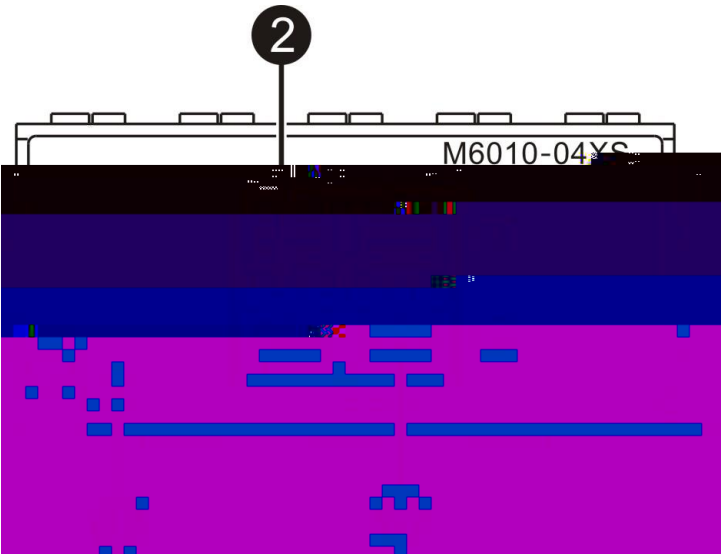

Power
1F~4F o
SFP+ o

M6010-04XS 4 SFP+ o DAC 1000Base-X SFP+/SFP

			Y
POWER	Power		

	GB 4943.1
	0 to 50°C
	-40 to 70°C
	10% 90% RH
	0.45KG
	226.5 * 87 * 41.1 L * W * H mm

 M6010-04XS	10G SFP+	1G SFP	10G SFP+	1G SFP				
 M6010-04XS	10G	DAC	Direct Attach Copper	SFP+	1	3	5	

-

2.1.6

	*	√	†	Ω	OBJ	□	/	▶	∂
⚠									
	18					24			

2.2

RG-S6010

2.2.1

	RG-S6010		™	
■				
■		RG-S6010	ĩ	
■	™	RG-S6010	◊	
■				

2.2.2

RG-S6010	◦		20cm	
√			◦	3

2.2.3

	RG-S6010		™	
■			Ů	ĩ
■			√	
■				

RG-S6010

	1.5M	0.4M
---	------	------

2.2.4

d Y

2.5

'	√	√
'	√	√


318

-
-
-

3.3

RG-S6010


20mm







1) 8 L 8 M4*8FMO



2) 4 M4*8FMO

3-1

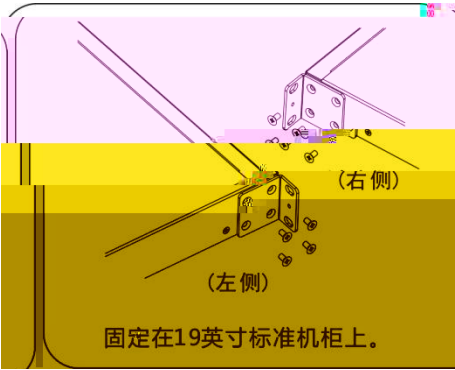

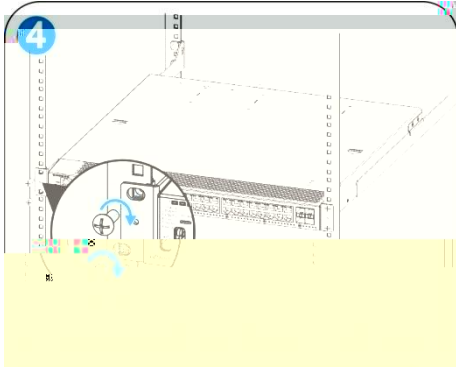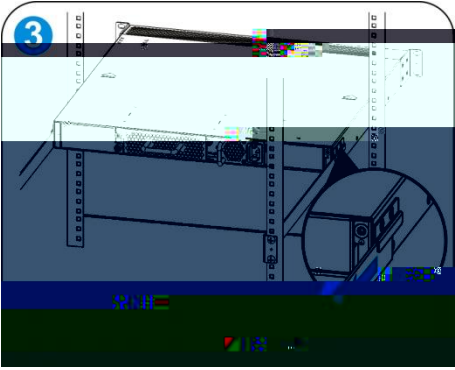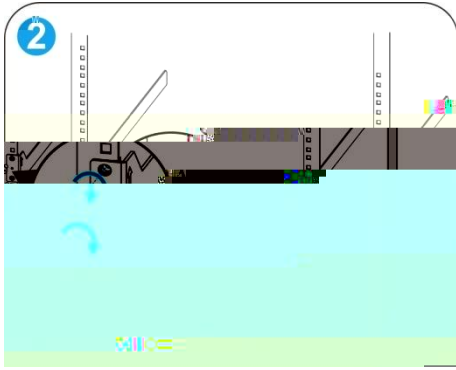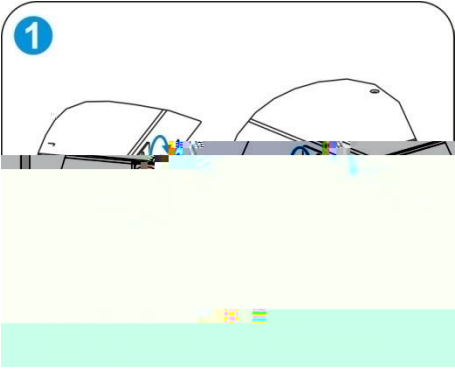

800mm – 1200mm

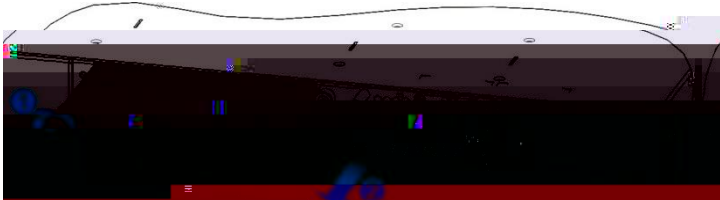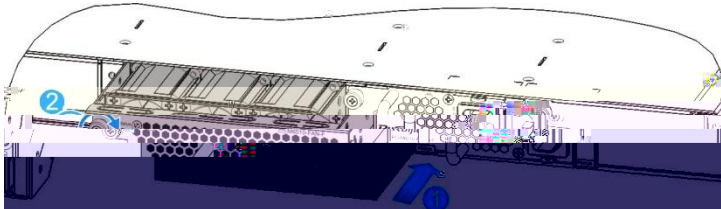

M6010

- 1) Ů RG-S6010

- 2) Ů

↑

V

↑

~ —

- 3)

3-8



a M6010

a

a

3.8

RG-S6010

	RJ-45	Console	DB9
a	9600	8	1

3.10

-
-

- 1) RJ45 RCMI
- 2) ,
- 3) RJ45

3.11

-
-
-

- 1)
- 2)
- 3)

3.12

-
-

■ **THE FUTURE OF THE FIRM** ■

■ **THE FUTURE OF THE FIRM** ■

■ **THE FUTURE OF THE FIRM**

0

Downloaded from <http://ajph.org/> on November 10, 2015

4


4.1

PC

Console

4-1

4-1

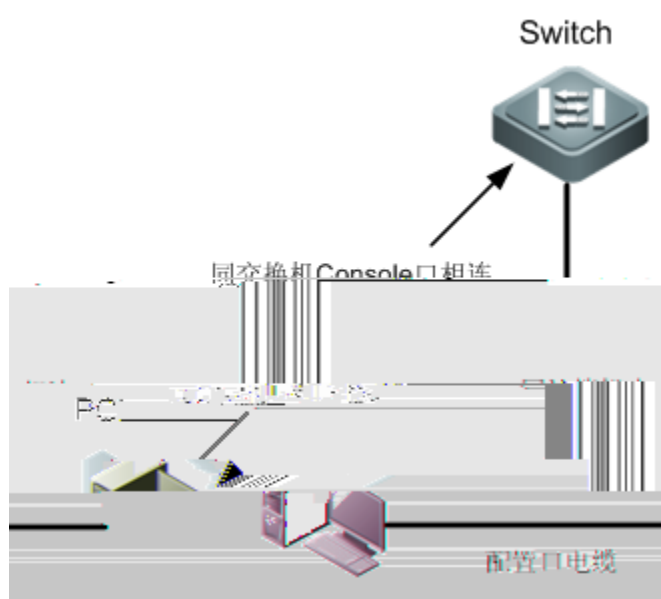

- | | | |
|----|------|---------|
| 1) | DB-9 | PC |
| 2) | RJ45 | Console |

■ PC PC Windows3.1 Terminal Windows 95/98/NT/2000/XP

■ $\ddot{\alpha}$ $\ddot{\alpha}$ 9600 8 1


- 1) 66 99 - 66 99 - 66 99 - 66 99 0 4-2

4-2




2) “U” 4-3

4-3



3) 4-4

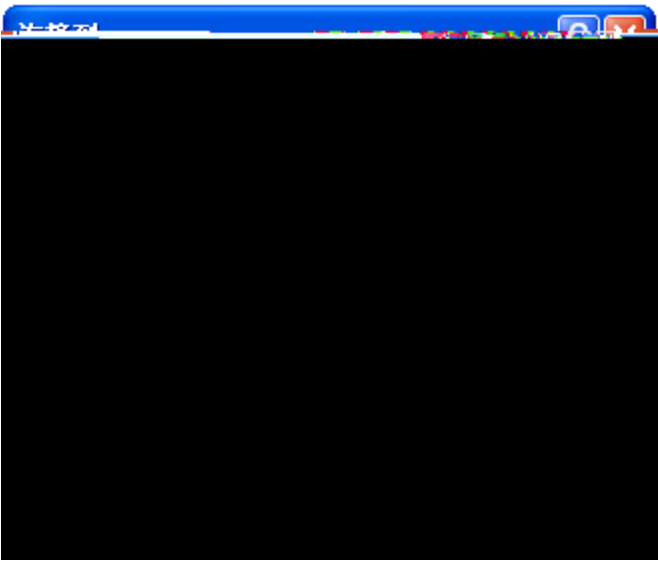

4) | < > 4-5 9600


8 1

4-5



5) | < > 4-6

4-6

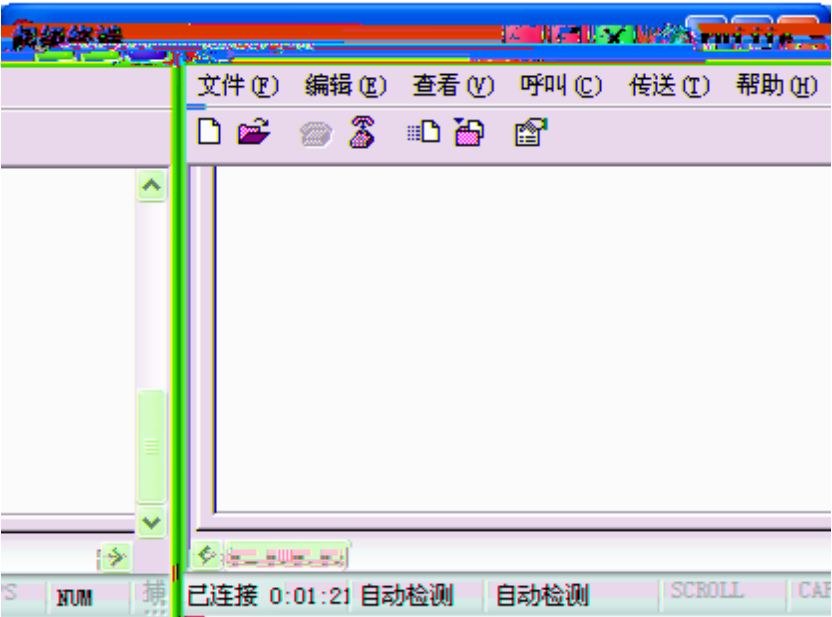

4.2

-
-
-
- 1
- ~ PC ă
-
- 4
-

5

5.1

RG-S6010	~	✓	✓
■ Status	~		
■ Status		~	~
■ Fan		~	~
■ Status		^	
■ PWR1/PWR2			✓
■ MOD	✓	✓	

CLI

RG-S6010	✓	✓
■		
■ o		
■		
■		



RG-S6010

5.2

	✓
■	~
	ü

■
■

78

0 7 78


RG-S6010

ト

ト

6

6.1

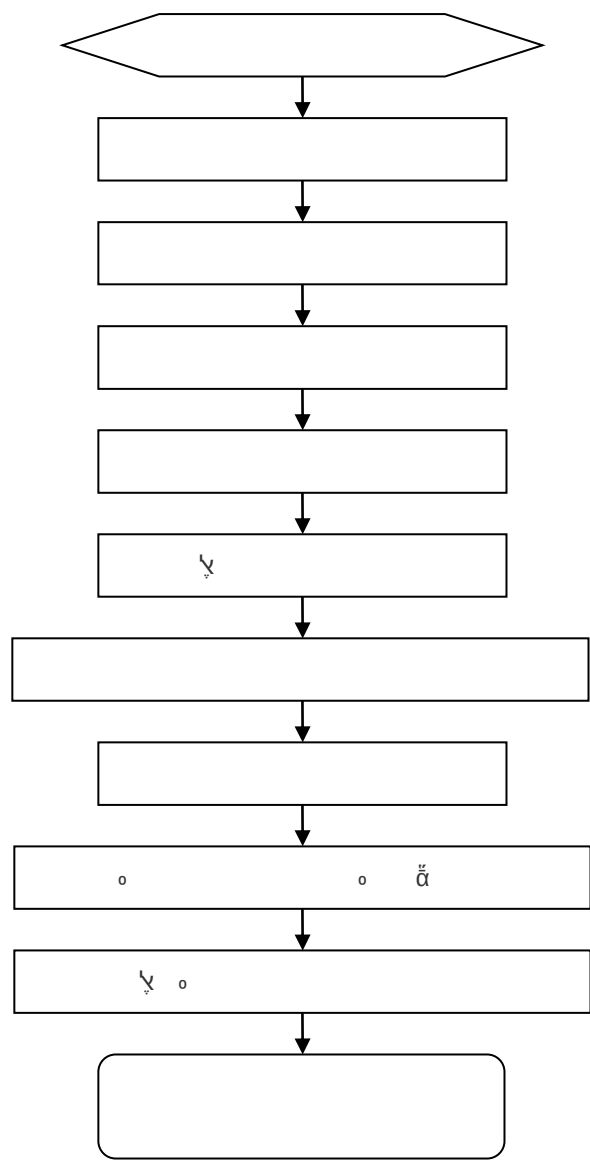


6.2

1

6

A _____

1000BASE-T/100BASE-TX/10BASE-T

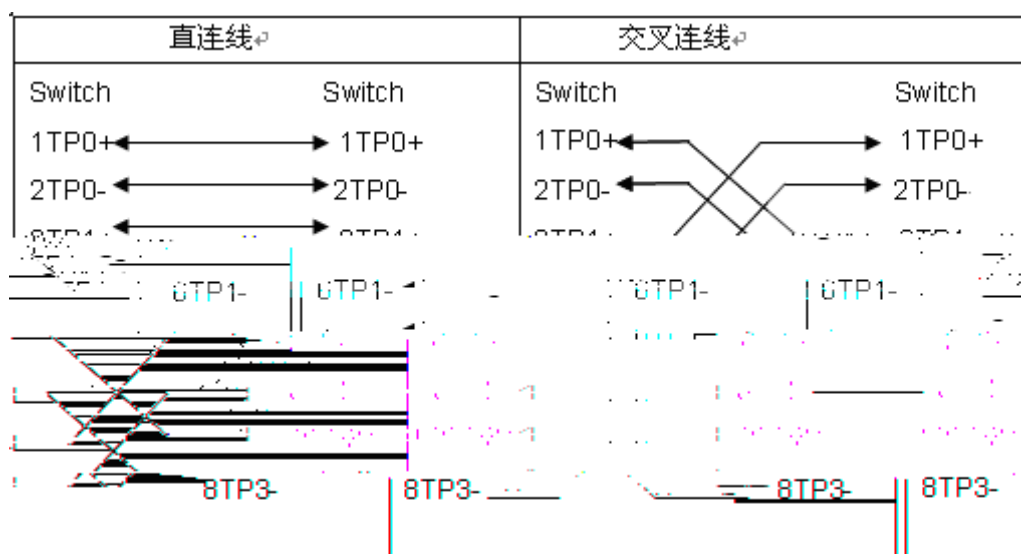
[illegible]

100BASE-TX/10BASE-T	~	10Mbps	100-ohm 3,4,5	100Mbps
100-ohm 5	~	100	100BASE-TX/10BASE-T	~
A-2:				Y
A-2 100BASE-TX/10BASE-T	~	Y		

Pin	插座	插头
1	Input/Receive Data	Output/Transmit Data
2	Input/Receive Data	Output/Transmit Data
3	Output/Transmit Data	Input/Receive Data
6	Output/Transmit Data	Input/Receive Data
4, 5, 7, 8	Not Used	Not Used

100BASE-TX/10BASE-T 1 1 1 , A-3


A- 3 100BASE-TX/10BASE-

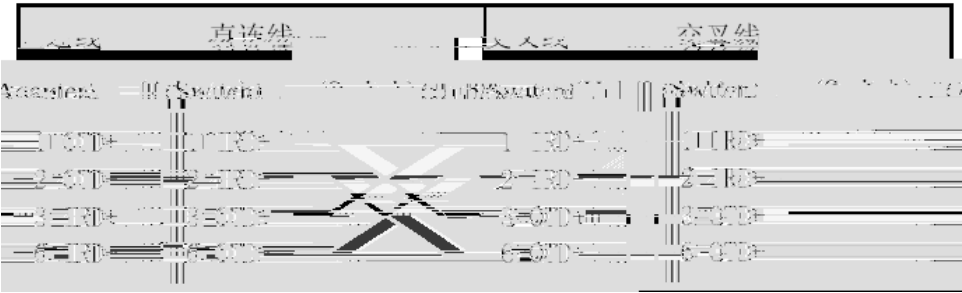

o

1

A- 4



B —Mini-GBIC

ˆ
 0
 ˆ
 SFP
 Mini-GBIC
 SFP+
 ˆ
 ˆ
 SFP
 SFP+
 ˆ
 ˆ
 Mini-GBIC
 SFP
 .doc
 SFP+
 .doc

Mini-GBIC SFP

GBIC/SFP	(nm)		DDM (Yes/No)	0 (dBm)		(dBm)	
				min	max	min	max
FE-SFP-LX-MM1310	1310		Yes	-22	-14	-30	-14
FE-SFP-LH15-SM1310	1310	†	Yes	-15	-8	-28	-8
Mini-GBIC-SX	850		No	-9.5	-3	-17	0
Mini-GBIC-LX	1310	†	No	-9.5	-3	-20	-3
GE-eSFP-SX-MM850	850		Yes	-9.5	-3	-17	0
GE-eSFP-LX-SM1310	1310	†	Yes	-9.5	-3	-20	-3
Mini-GBIC-LH40	1310	†	Yes	-2	3	-22	-3
Mini-GBIC-ZX50	1550	†	Yes	-5	0	-22	-3
Mini-GBIC-ZX80	1550	†	Yes	0	4.7	-22	-3
Mini-GBIC-ZX100	1550	†	Yes	0	5	-30	-9

(μm)	
62.5/125	2km


RG-S6010


	(nm)		(μm)	(MHz · km)		min	max	min	max
--	------	--	------	------------	--	-----	-----	-----	-----

XG-SFP-SR-MM850

C —

C- 1

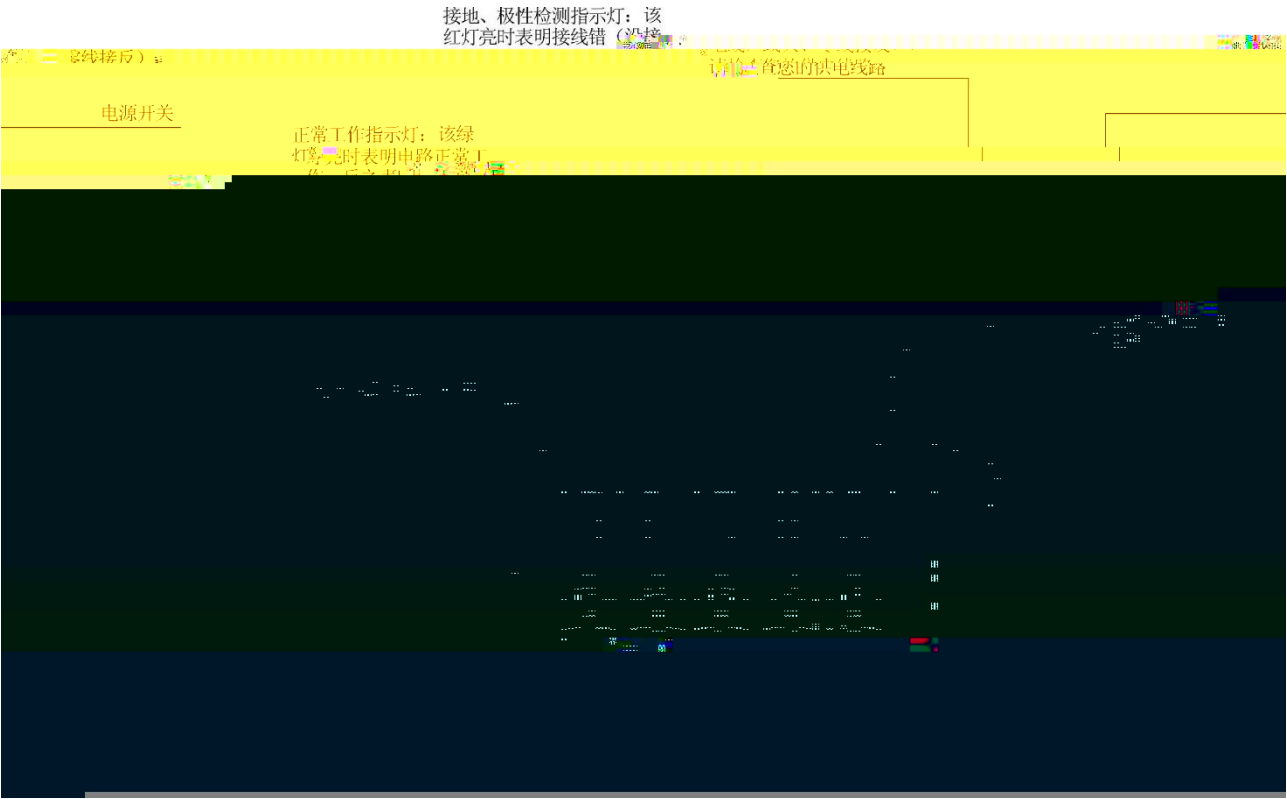

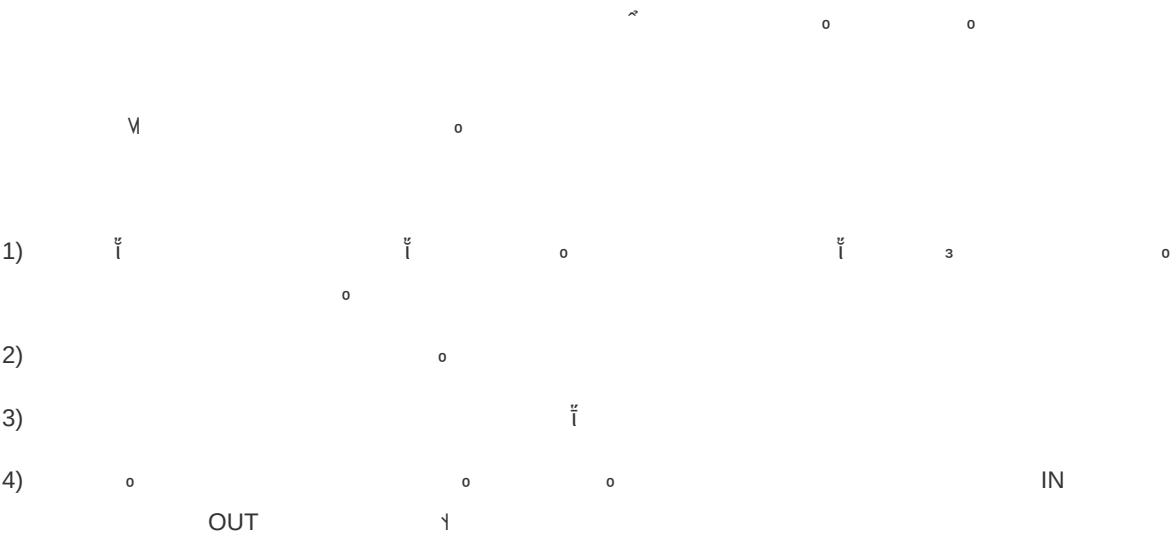


D —

RG-S6010

19

D- 3

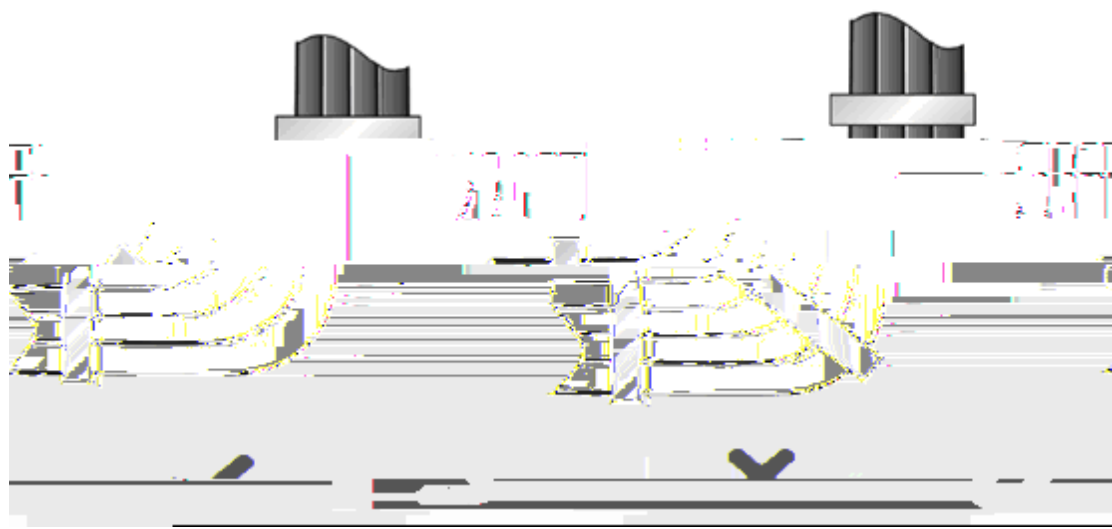

■

η

■

■

ī

z

■

ŭ

D-4

D- 4

