

Ø W

ǎ

î æ ǫ

z ǎVid

z Ð ‘ K

z à

ǎ

z iHǎ

<http://www.ruijie.com.cn>

z iHǎǎ

1 cp

PC-2DP48DC-E⁰ ©iH⁰ gi⁰ R⁰ M⁰ E⁰
9M⁰ E⁰ kU⁰ 48M⁰ k⁰ ž⁰ ó⁰ ož⁰

1.1 PC-2DP48DC-E ěp

1.1.1 Pě

= 1-1 Pě =

CŸ	PC-2DP48DC-E
Dd	48
V€ Ê t..	0°C ě 45°C@0~1800œ
¤ Ê t..	-40°C~ 70°C
V€ Ê y.	5% ě 95% RHk ě
¤ Ê y.	5% ě 95% RHk ě
ž × l × ž m mmd	484.6*102.85*66
• kgd	3.99


= 1-2 ž DB78 ě

ž.	1.5M
Ø.	34mm
Ø.	77mm
Ø.	23mm
Ÿ	48PIN
žá	20AWG
ž	þ
žē	PVC
Ø	PVC
Ů	3A/Pin
LLCR	P

Ⓐ	P-Py 500Vz P-Shelly 1500V
Ⓜ	100N
7'	176N Max.
	14.5N Min.


1. Ø 450

R

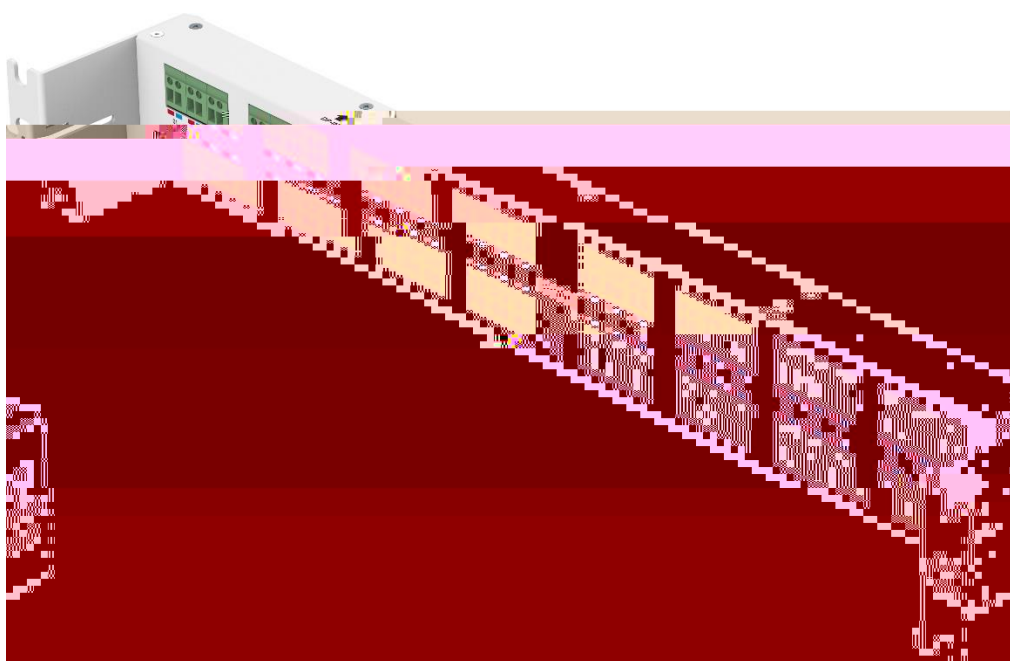


2. d 450

R

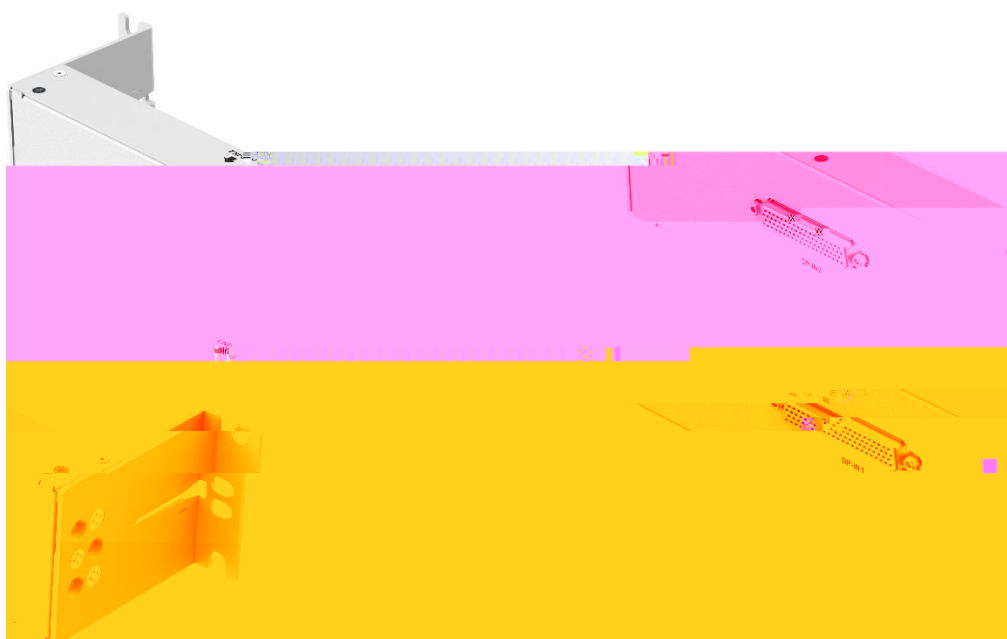

3. Ø R g

d

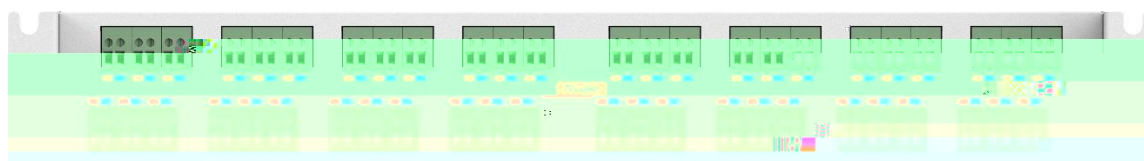

4. $\mathbb{Q}$ $\mathbb{R}$

5. $\mathbb{Q}$ $\mathbb{R}$

6. Q R

2 ~~7~~€

2.1 PŘ

 ~~Acc~~

-

2.1.1 Př

z 𐎠𐎢𐏁𐎠

xiǎo xīn

z 4 ẽ ð

0 yBxN@aP

č BŮŽ

z GtDwGbž

Z

z x₀•/2%k

ož

z xyg₀y

ož

3 cē

ē j.ūv.

kēñ.

đ Ā F D

›

ēē

ē

¢ 3-1 ēē



(3) ... 6 M4x8X $\overline{\text{A}}$ 1 2 L° ě ě ož

¢ 3-2 L Ě ě ¢

3.5 Ě ě G



*4E H@N8)G ě Z Ľ P

>

x 5â ò y

(1) ě. Y 1 ě ě z

(2) x ě ě ož

¢ 3-3 Ě G ě ¢

3.6

x5â ò y


(1) @ 100

9~10mmz

(2) + Rô k 1° 0E %Nμ 0 + M k w ... %r-
MY z

(3) x 0 7Q k° 0E z

¢ 3-4 00 G i ¢

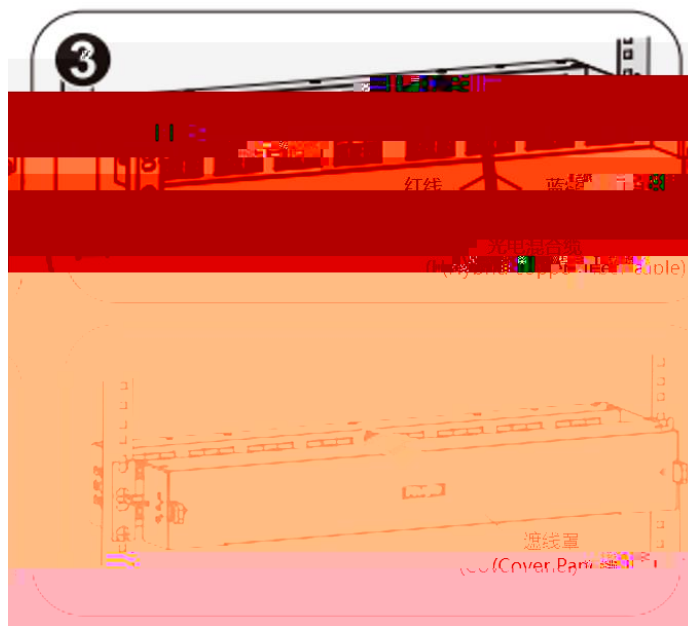


3.7 0

5â ò y

(1) G0 NM DP-IN10•DP-IN2Mz

(2) 1 DB78N000 DP-INM000 k g
- DB78N0ž

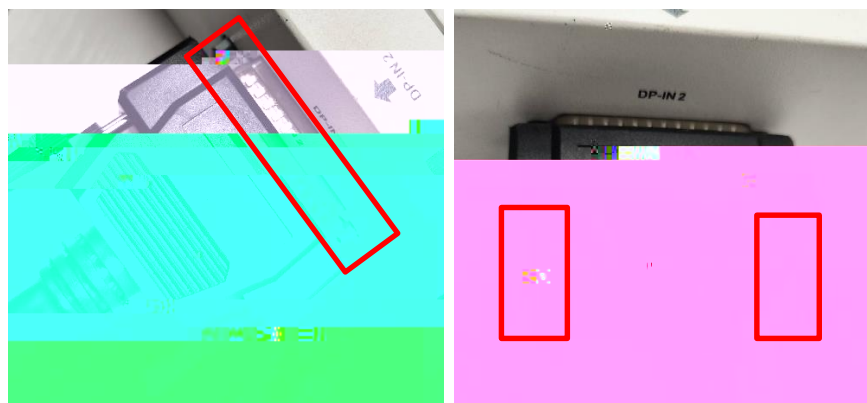

(3) 1 DB78N000 DB78NM DP-OUTM000 k g-
DB78N0ž

¢ ¢



(1)	ò	Ź	/RĹ	PC-2DP48DC-E3018G	Ng-
	ö	z			
(2)	ò	ö	©k	Ź	
	ö	z			
(3)	ö	Q	Ź	Ź	z
	ö	Q	Ź	Ź	z
(4)	ò	Eă	DB78N	Ź	Ź
	T	Ź	Ź	Ź	Ź

4 mế

4.1