

RG-MF2920U

MF2920U_1.0(1)B5 WEB

V1.0

2023-08-10

copyright © 2023

copyright © 2023



-
-
-

- <http://www.ruijie.com.cn>
- <http://www.ruijie.com.cn/fw/>
- 7*24h <http://ocs.ruijie.com.cn>
- 7*24h 4008-111-000
- <http://www.ruijie.com.cn/special/fw/tool/xryf/>
- 4008111000@ruijie.com.cn



APP



1.


<>		< >
[]		[]
>>		[]>>[]
		” “ ” “ ”

2.

!

!



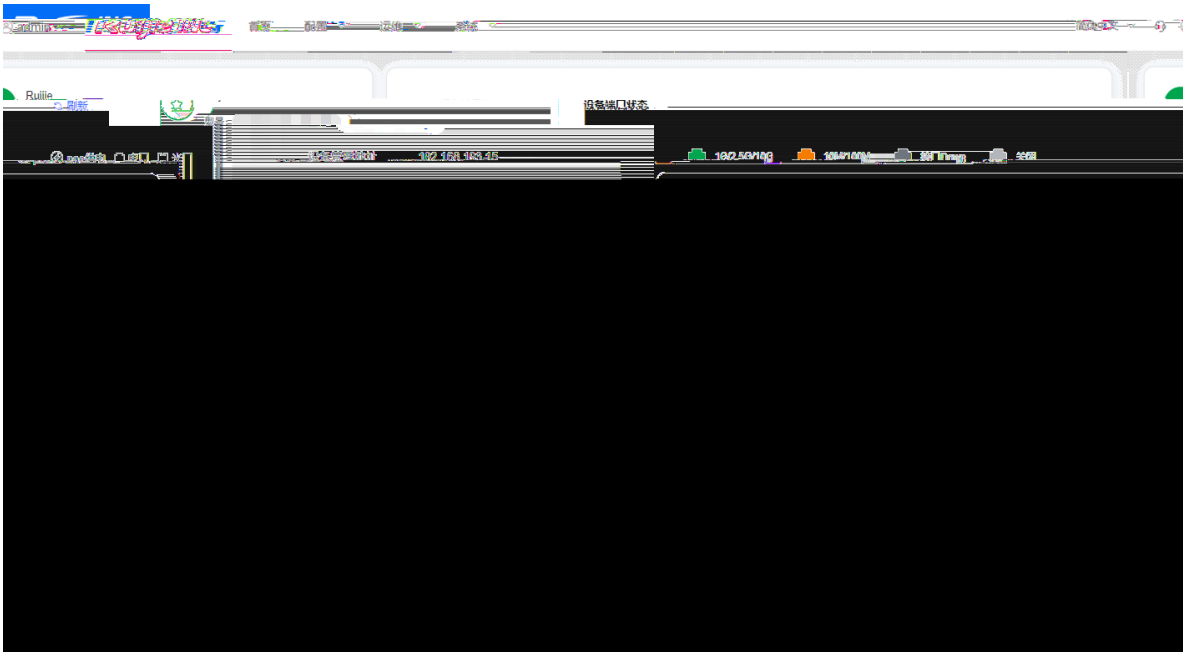

1.

WEB



2.

WEB

1.3.3


1. /

/

MAC

PoE

/

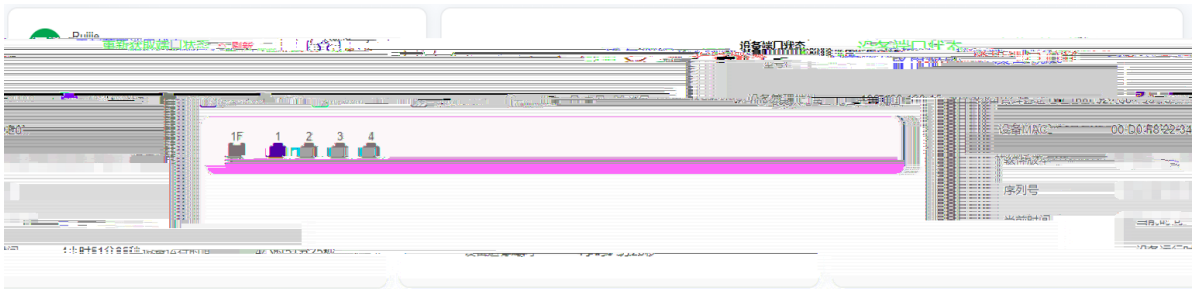

●

[] < >

2.



●

< > /

0

●

< >

●

/ /

●

DDM

<DDM > DDM



DDM DDM

3. POE /ARP

MAC地址

00d0.f822.3369

端口

G0/02

总功率: 126 W

剩余功率: 126 W

端口	POE开关设置	供电状态	供电功率	IP地址
G0/01	开启	关闭	0	172.29.15.1
G0/02	开启	关闭	0	
G0/03	开启	关闭	0	
G0/04	开启	关闭	0	
G0/05	开启	关闭	0	

共 9 条

共 1 条

● POE

[POE] < > POE

POE POE POE

● ARP


[ARP] < > ARP




1.3.4

1.

(1)

a

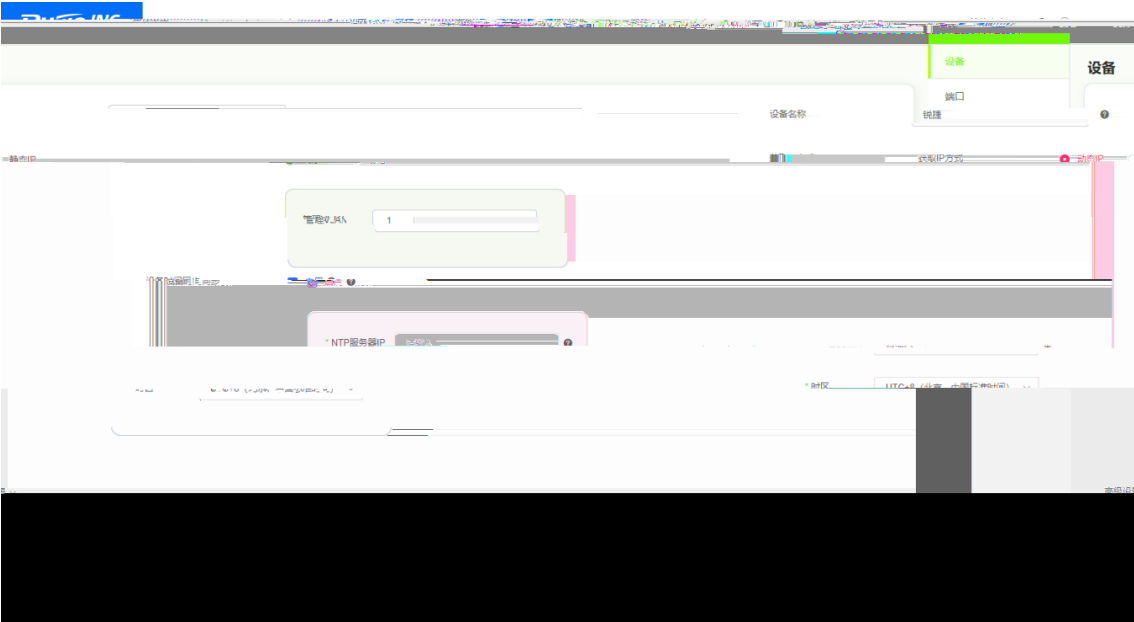


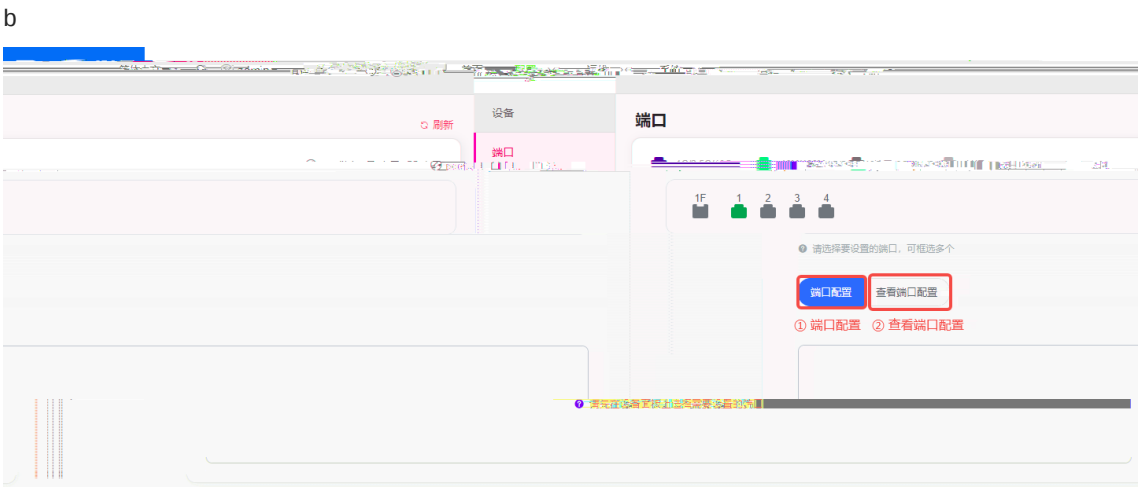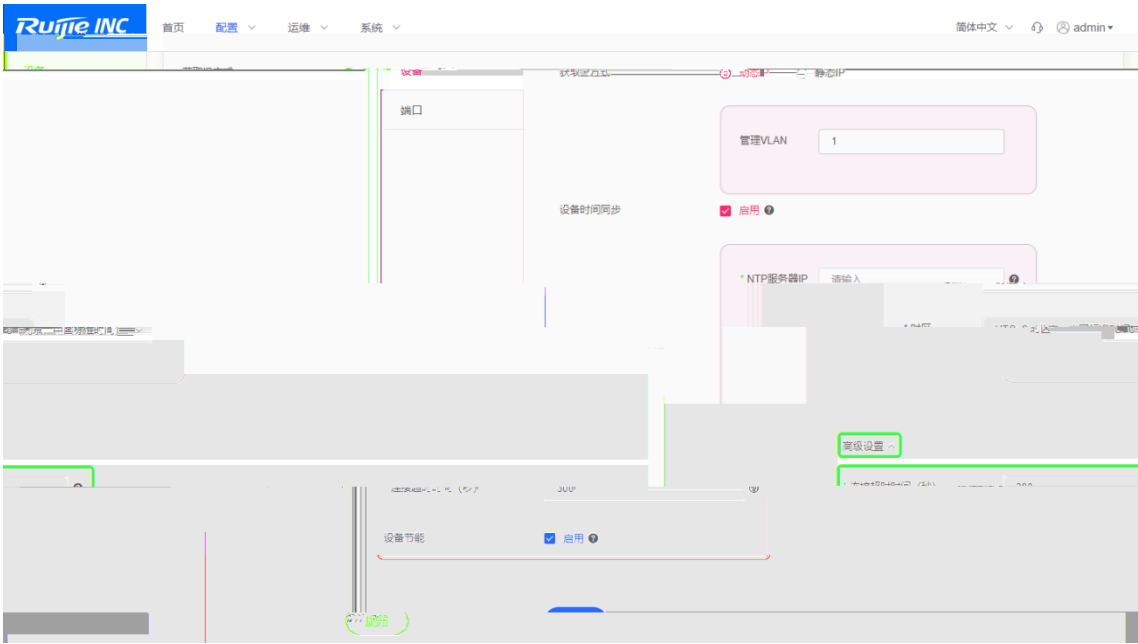

o



< >

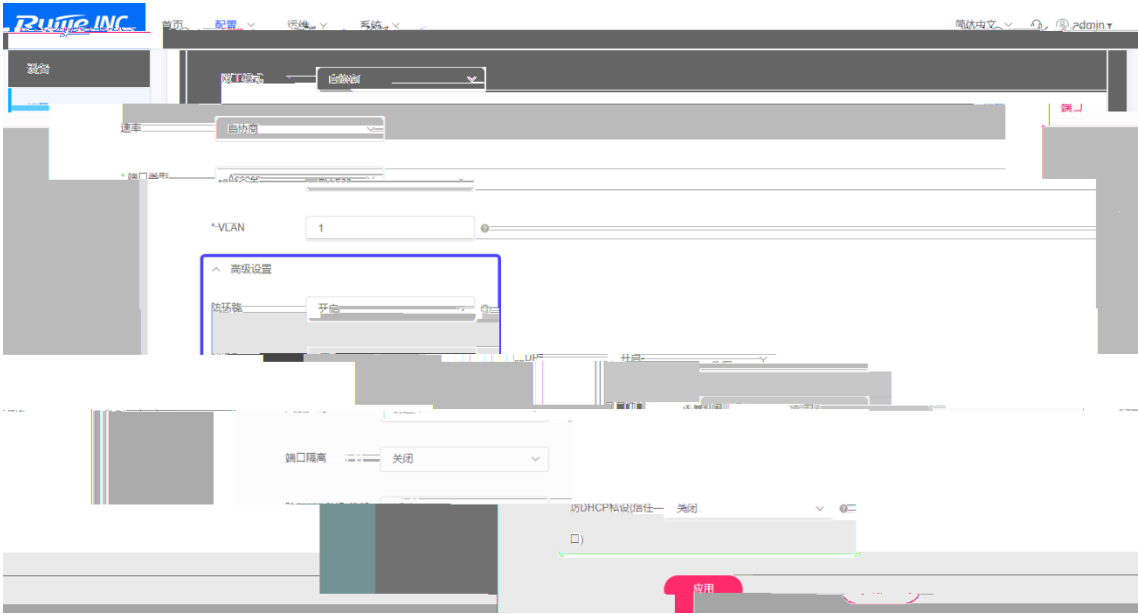


< >

VLAN


o

< >

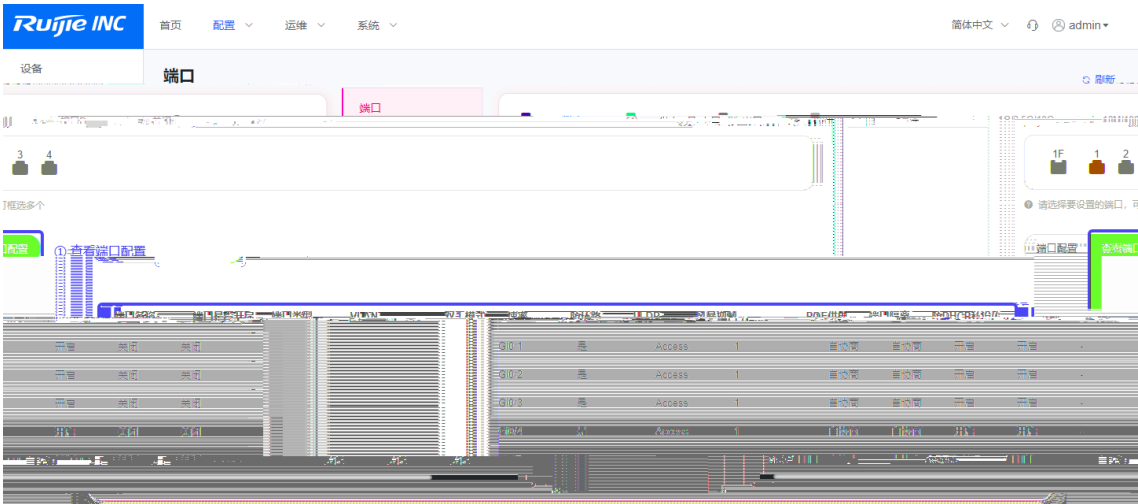

(2) IP


a

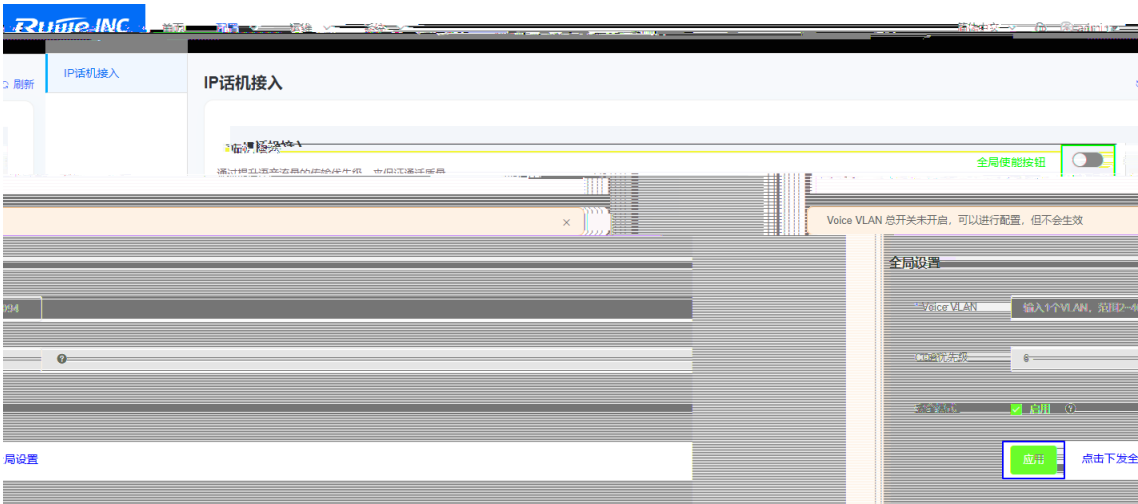




	<	>
Voice VLAN	<	>
Voice VLAN	Voice VLAN	Voice VLAN
Voice VLAN		


b OUI

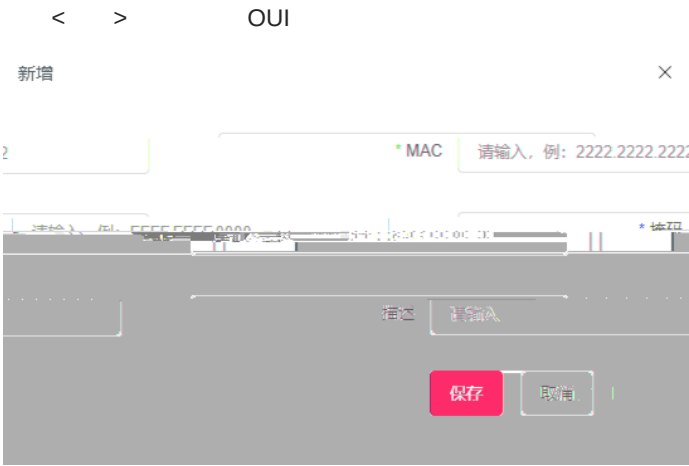

C

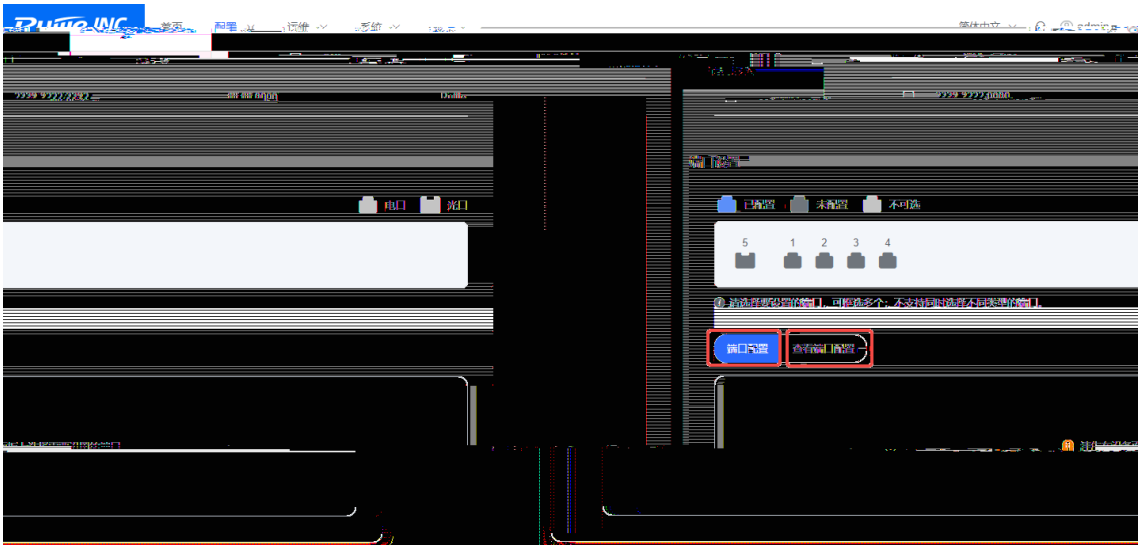

○

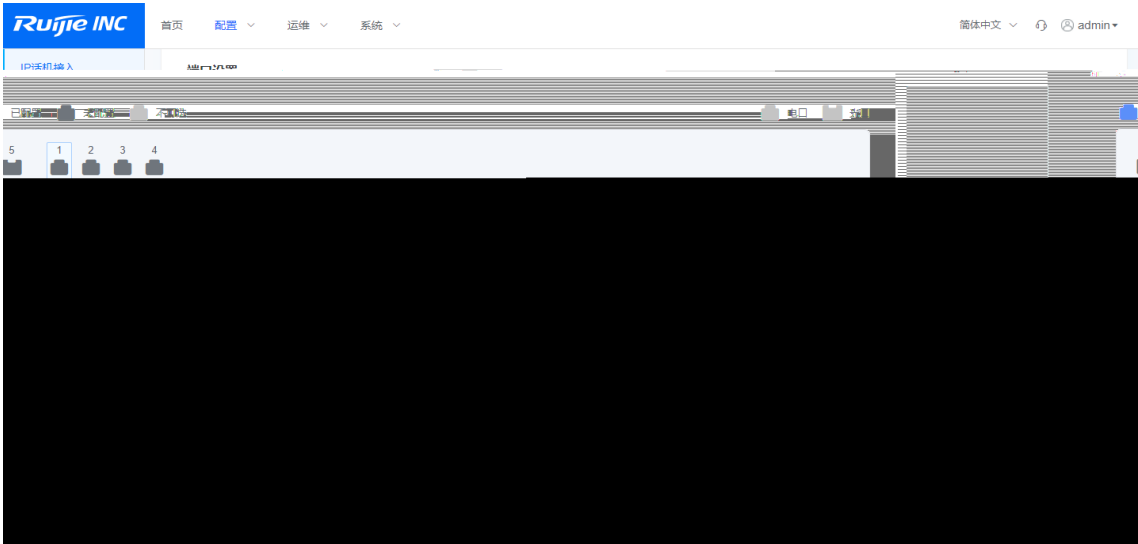


< >
< >

Voice VLAN LLDP-MED


○

< >

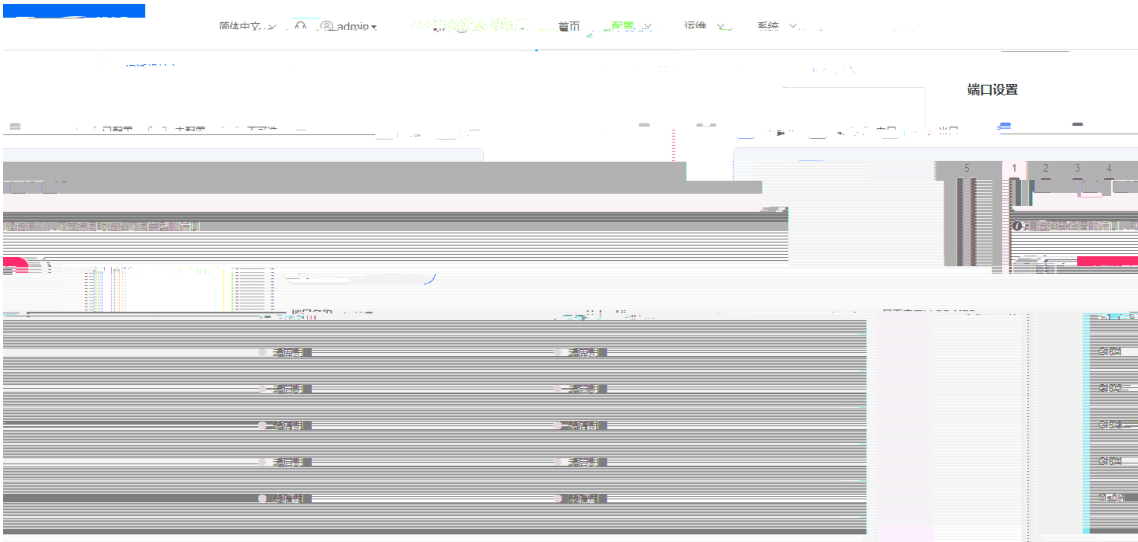


1.3.5

- 1.
(1) Ping
[Ping] IP < >

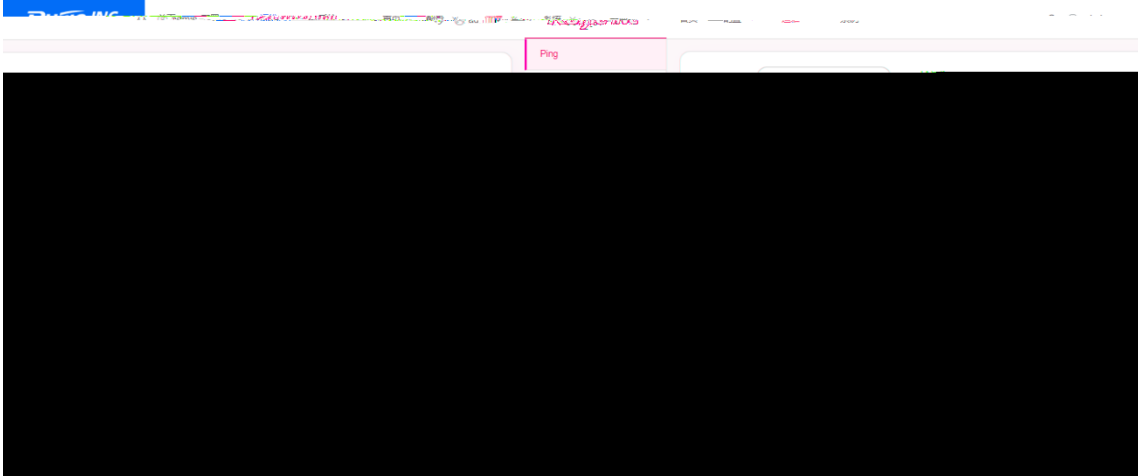

- (2)

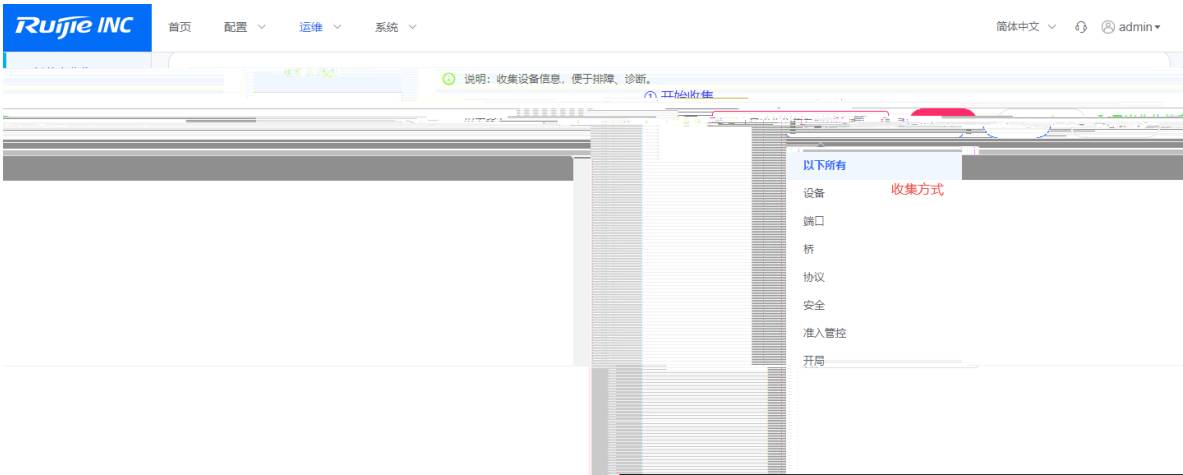

_20220118182247.txt

2.



(1)

< > 1



(2)

- 
- 
-
- 2~3

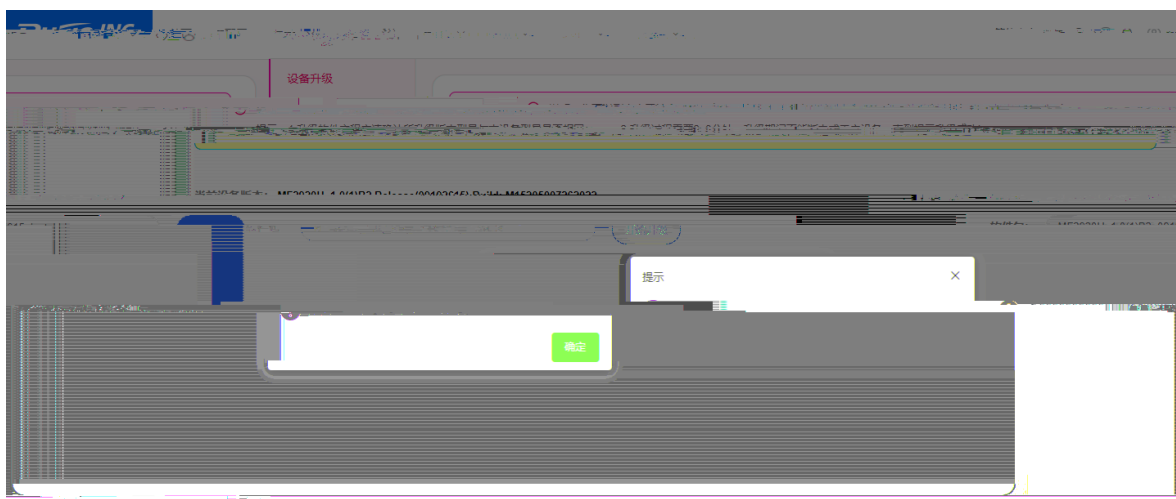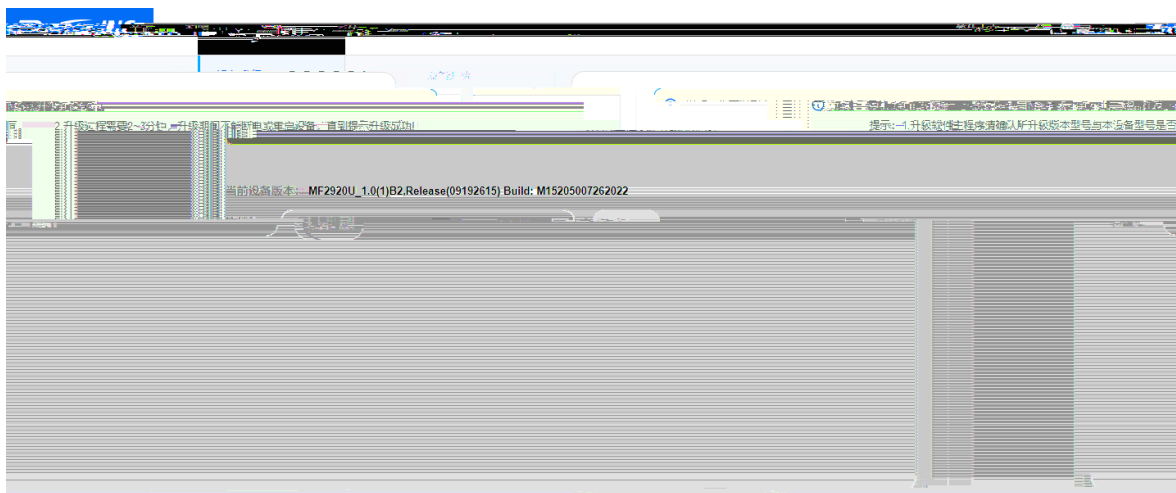

(3) Boot



Boot



3.

(1)


a



o

< > config.json

o

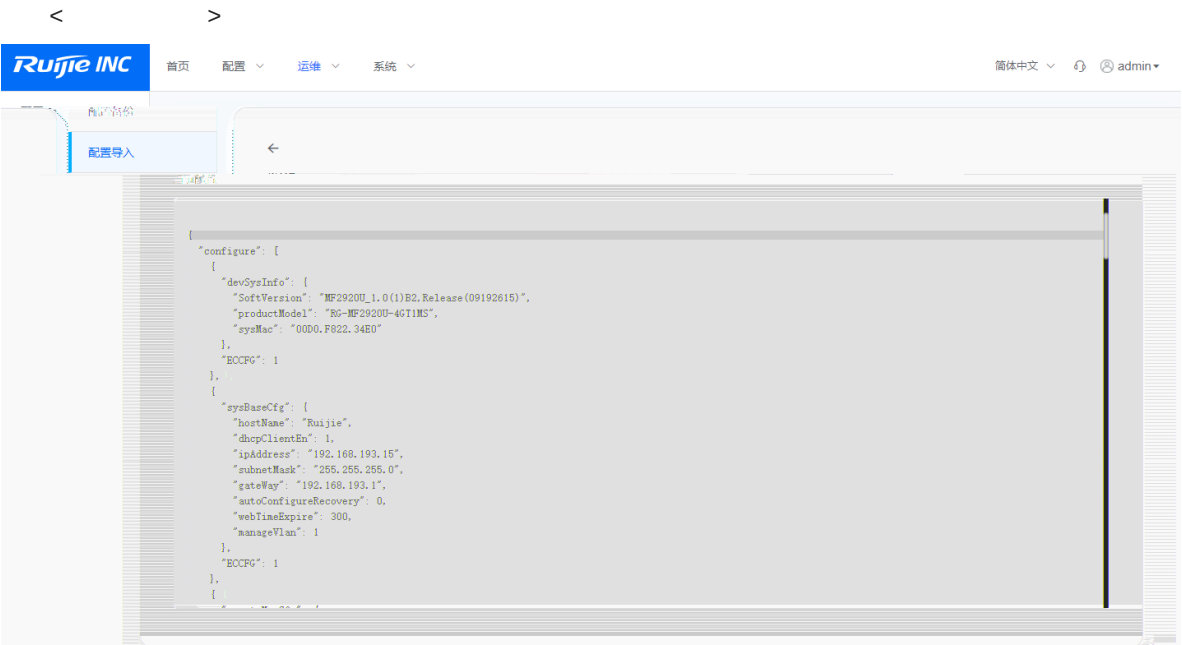

b



o

< > < >



○

<

>

(2)



●


2-3

●

<

>

config.json

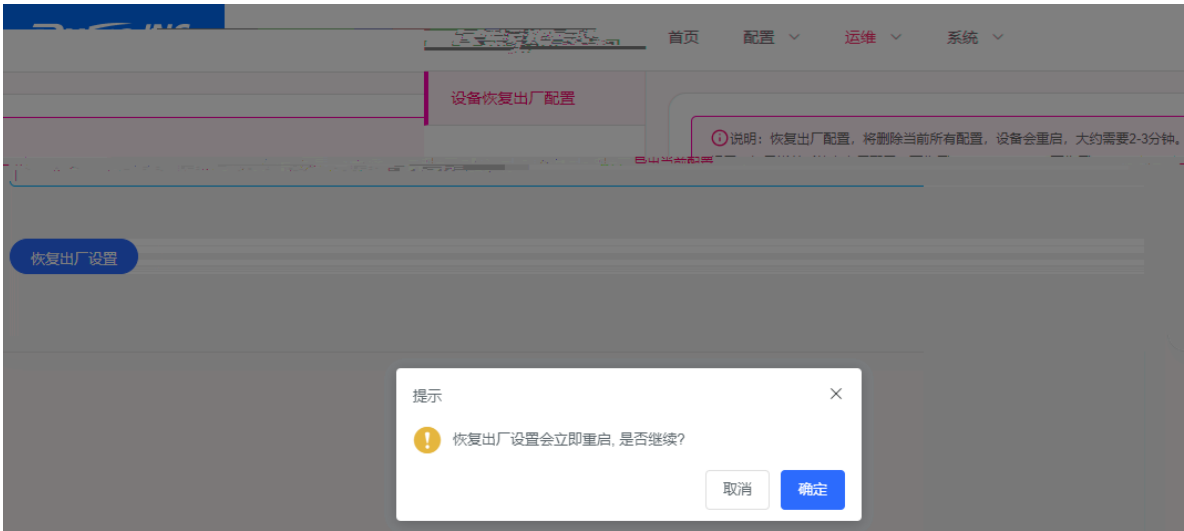

●

<

>

●

<

>

config.json

1.3.6

1.

(1)

[

]

2 CLI



CLI

2.1

WEB Ruijie(diag)> CLI



exit

2.2

CLI reboot

2.3

2-1 show_sys_info

System description	
System software version	
System software number	

System boot version

boot

```
Ruijie(diag)#cat 1:system/config.json
{"configure":{"devSysInfo":{"softVersion":"2920U_1.0(1)B1_09131915","productModel":"RG-SF2920U-8GT1MS","sysMac":"00D0.F822.34CE"},"ECCFG":
{"192.168.193.104","subnetMask":"255.255.255.0","gateway":"192.168.193.1","autoConfigureRecovery":0,"webTimeExpire":300,"manageVlan":1},"
...
Ruijie(diag)#write
```

2.6 Ping

ping ping ip address



ping ip ping

```
Ruijie(diag)ping 192.168.193.1
Sending 5, ICMP Echoes to 192.168.193.1, timeout is 2000 milliseconds:
ping: rcv 192.168.193.1 1 ms
ping: rcv 192.168.193.1 0 ms
ping: rcv 192.168.193.1 1 ms
ping: rcv 192.168.193.1 0 ms
ping: rcv 192.168.193.1 0 ms
Success rate is 100 percent (5/5),round-trip min/avg/max = 0/0/1 ms
Ruijie(diag)#
```