




RG-WALL1600-M 5100E

V1.0

©2013



<http://www.ruijie.com.cn/>

	RG-WALL1600-M5100E
	1.0
	PDF

2020.5.15	V1.0			

1

RG-WALL1600-M5100E

IPSec SSL VPN
IPv4 IPv6

Web

NAC SSL

RG-WALL1600-M5100E

RG-WALL1600-M5100E

1.1 RG-WALL1600-M5100E

	RG-WALL1600-M5100E
	0 to 40°C
	-25 to 70°C
	20% 90% RH
	5.6Kg
	394x432 x 44.45 L * W * H mm 1RU
	100-240 VAC, 50-60 Hz
	110 V / 3 A, 220 V / 1.5 A
/	34W/40 W
	335 BTU/h

RG-M5100E

A

RG-WALL1600-M5100E

1

3+5 Q ‡ Ö3+5 Q ‡

1 USB

RG-WALL1600-M5100E

1-2

1-2 RG-WALL1600-M5100E



2 ~~0101~~

2.1

RG-WALL1600-M5100E

$\overline{\Gamma} \hat{\Gamma} \quad \delta \quad \kappa \quad \hat{A}$

2.1.1

2.1.2

2.2.3

RG-WALL1600-M5100E

2.2.7 EMI

2.3

2.4

RG-WALL1600-M5100E


2.5

	2	2	USB	2	Console	8	4
			SFP				

3

RG-WALL1600-M5100E

3.1

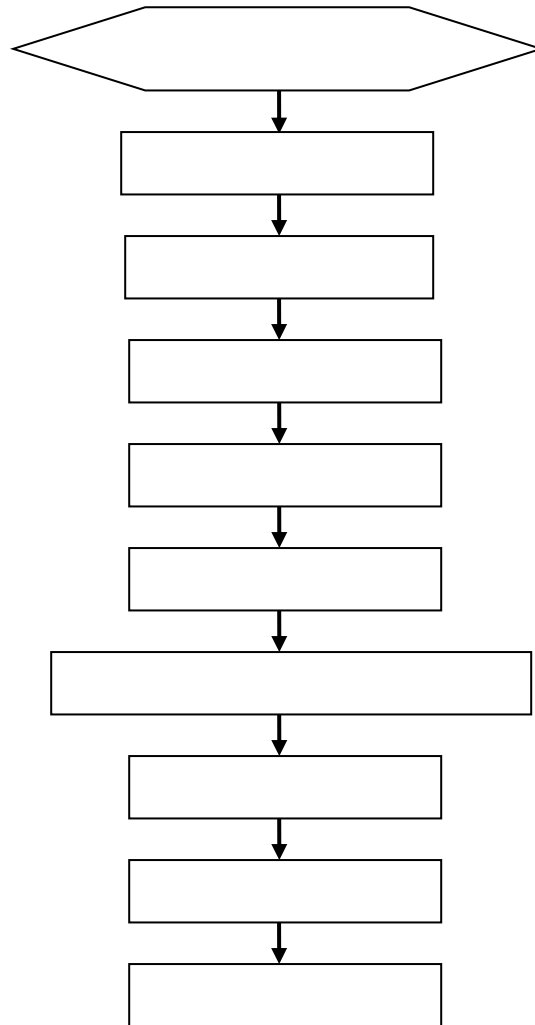

3.2

RG-WALL1600-M5100E

3.3

- 1) RJ45
RJ45
- 2)
- 3) RJ45
- 4)

3.7

- 1)
- 2)
- 3)

3.8

3.9

SFP

SFP

SFP

- 4)
- 5) SFP

6) 3-7

- 1.
2. SFP
- 3.
4. SFP
SFP

3-7

5.

4


4.1

Console

4-1

WAN1

Internet

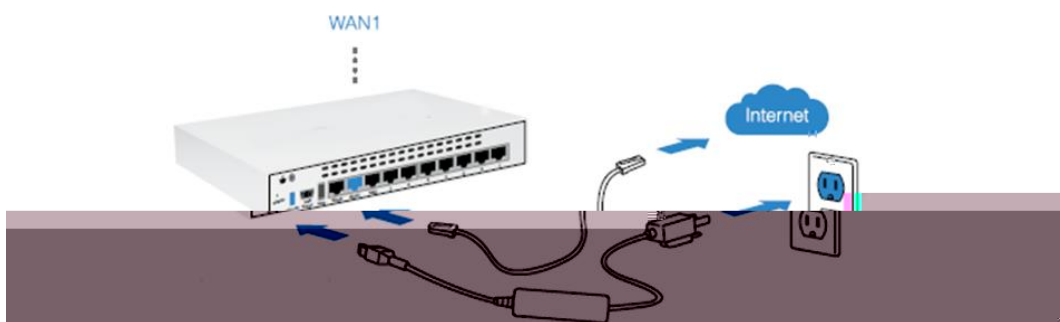

4-1


Web

LAN

PC

IP : <https://192.168.1.99>

admin

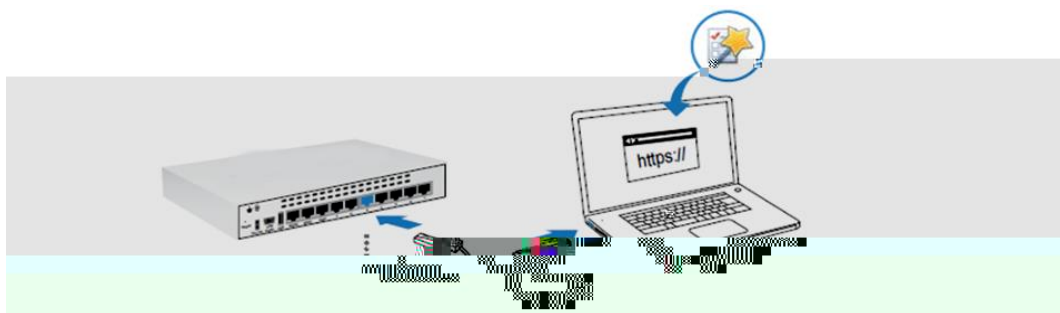

4-2

Console

PC


Console

12)


DB-9

PC

13) RJ45 Console

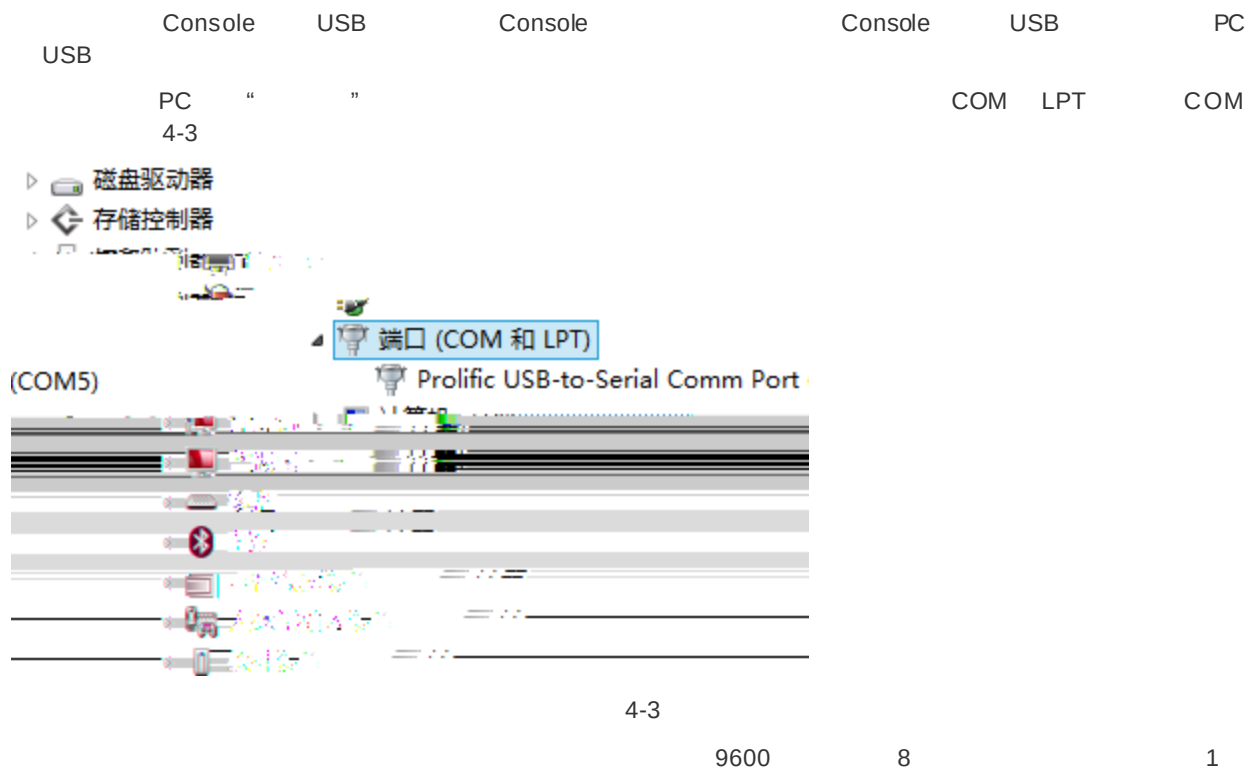

14) “File”-“Connect” Connect -“new session”

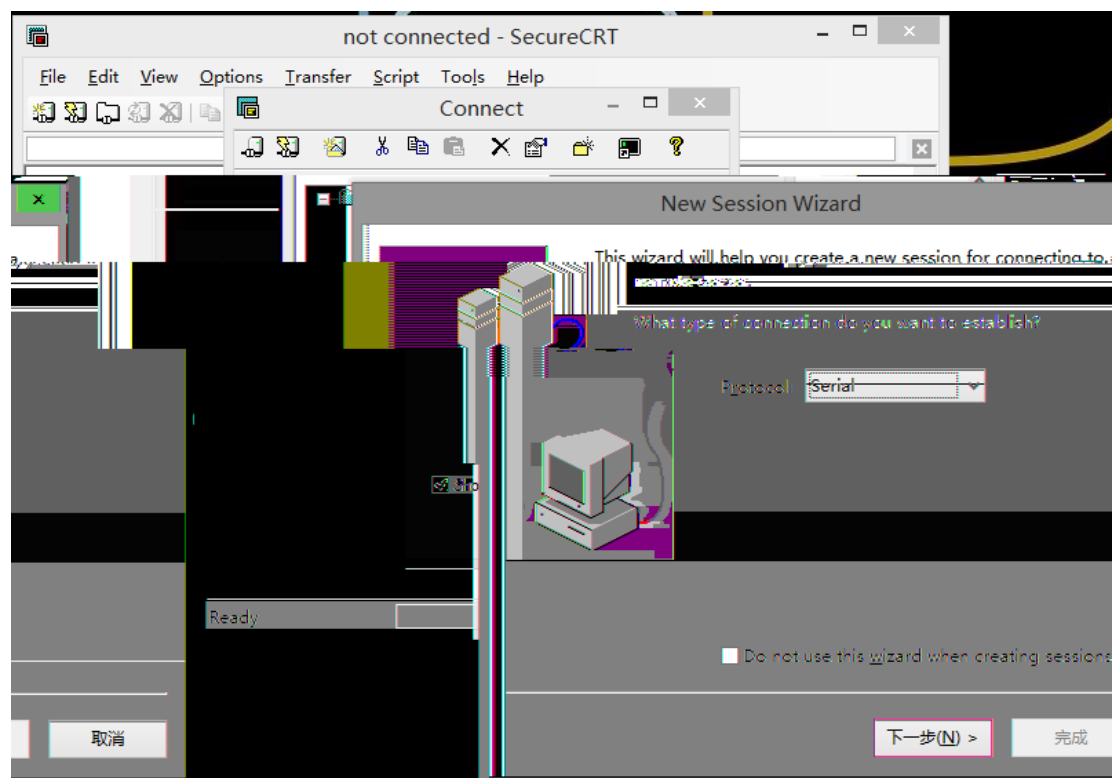

4-4

5

5.1

RG-WALL1600-M5100E

RG-WALL1600-M5100E
RG-WALL1600-M5100E

RG-WALL1600-M5100E Internet
RG-WALL1600-M5100E

Telnet

5.2

6

6.1

6.2

1

4

5 **link**

link

1

2

1310nm

1550nm

3

4

A 3 3


1000BASE-T/100BASE-TX/10BASE-T

1000BASE-T/100BASE-TX/10BASE-T

MDI/MDIX Crossover


1000BASE-T IEEE 802.3ab 100 1000BASE-T 4 100-ohm 5 5 UTP 4 STP 1000BASE-T

A-1 1000BASE-T

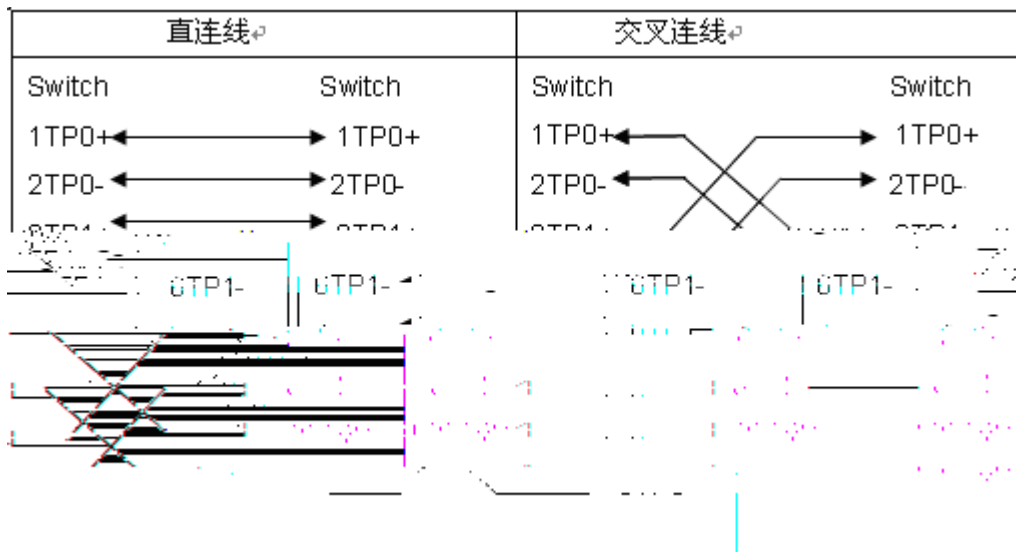


100BASE-TX/10BASE-T 100-ohm 5 100 10Mbps 100-ohm 3,4,5 100BASE-TX/10BASE-T 100Mbps

A-2 100BASE-TX/10BASE-T

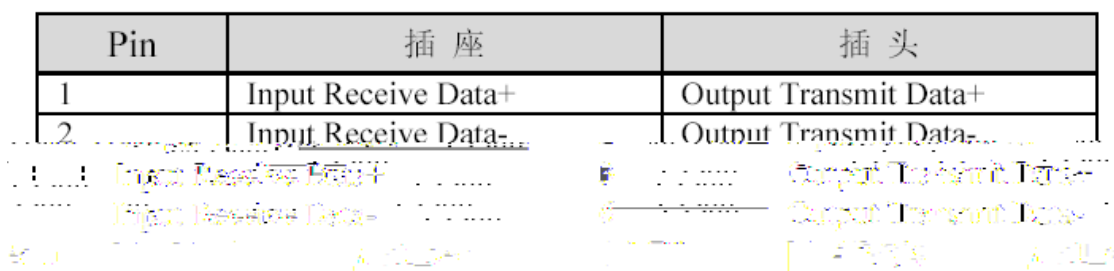


100BASE-TX/10BASE-T

A-3 100BASE-TX/10BASE-T

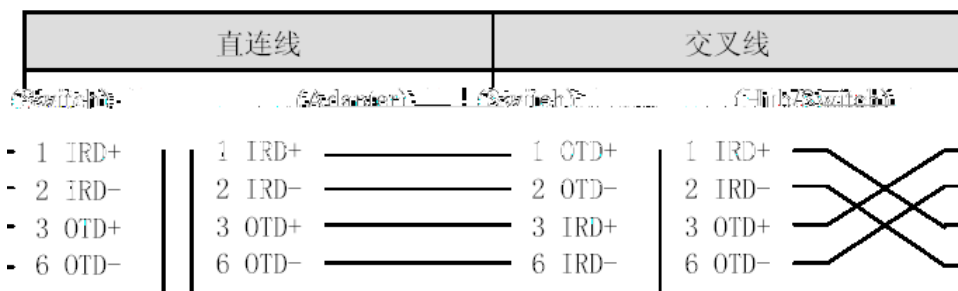

A 4



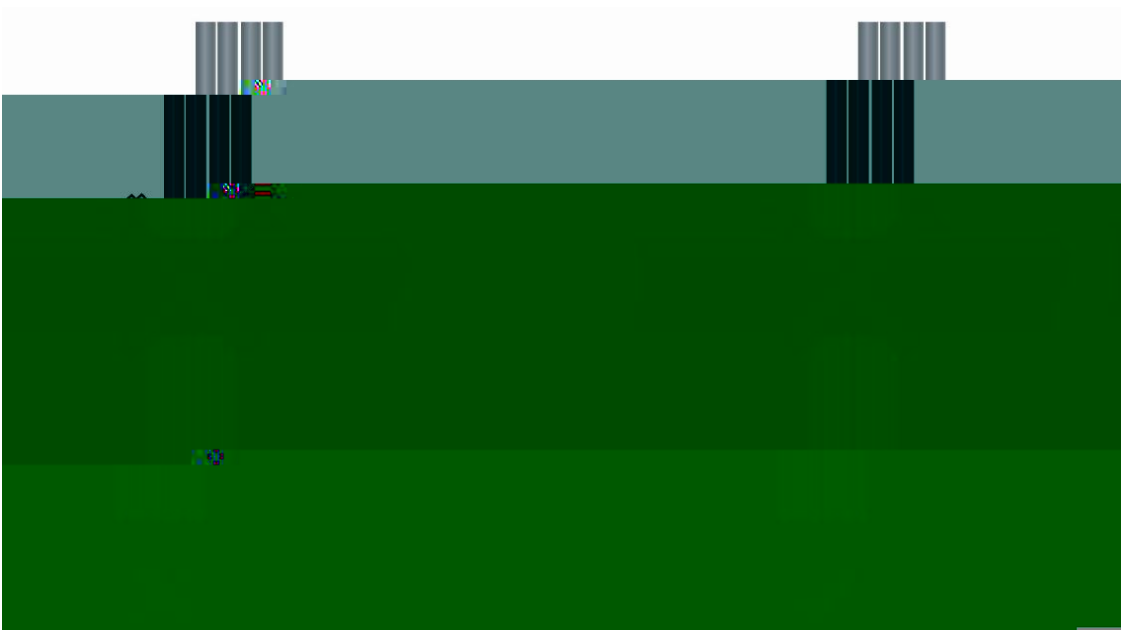

D-3

D-3



220V

-48V

D-4

D-4

25

mm	mm
10	80~150
10~30	150~200
30	200~300