

+

```
Ruijie(config)#wlan-config 1 SSID-ALL  \ \      +ssid
Ruijie(config)#ap-group default
Ruijie(config-group)#interface-mapping 1 10  \ \      wlan  vlan      AP
```

```
Ruijie(config)#wlan-config 1 SSID-Slot1
Ruijie(config)#wlan-config 2 SSID-Slot2
```

.....

```
Ruijie(config)#wlan-config 24 SSID-Slot24
Ruijie(config)#ap-group default
Ruijie(config-group)#interface-mapping 1 10 radio 1
Ruijie(config-group)#interface-mapping 1 10 radio 2
Ruijie(config-group)#interface-mapping 2 10 radio 3
Ruijie(config-group)#interface-mapping 2 10 radio 4
```

.....

```
Ruijie(config-group)#interface-mapping 24 10 radio 47
Ruijie(config-group)#interface-mapping 24 10 radio 48
```

+

```
Ruijie(config)#wlan-config 1 SSID-2.4G
```

```
Ruijie(config)#wlan-config 2 SSID-5.8G
```

```
Ruijie(config)#ap-group default
```

```
Ruijie(config-group)#interface-mapping 1 10 radio 802.11b \\802.11b 2.4G
```

```
2 10 radio 802.11a \\802.11a 5.8G
```

AP  
vlan


AP

AP

AP

AP


ssid,

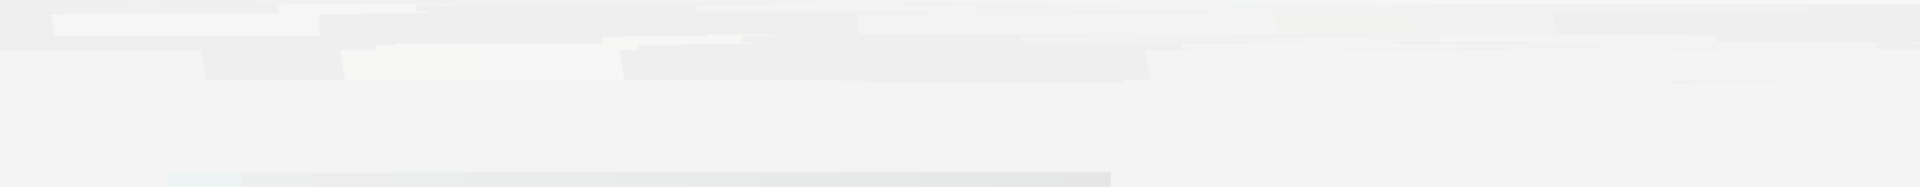

# AP

| AM5528                             | AP | AM5528-Slot-3 |
|------------------------------------|----|---------------|
| Ruijie(config)#ap-config AM5528 \\ | AP |               |
| Ruijie(config-ap)#slot 3           |    | AM5528-Slot-3 |

| AM5528                             | AP |
|------------------------------------|----|
| Ruijie(config)#ap-config AM5528 \\ | AP |
| Ruijie(config-ap)#reset slot 3     |    |

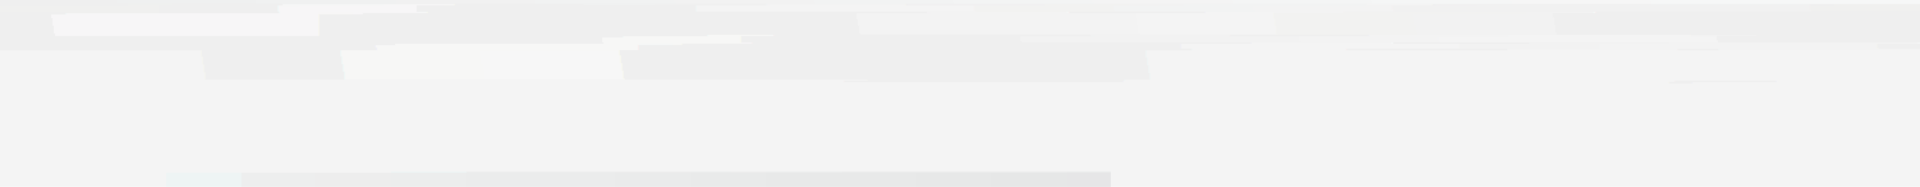




|    |                                                |    |      |     |          |     |
|----|------------------------------------------------|----|------|-----|----------|-----|
| 1) | AM5528                                         | AP | 6    | 149 |          |     |
|    | show ap-config slot <i>ap-name</i>             |    | AP   |     | Radio ID |     |
|    | Ruijie(config)#ap-config AM5528                |    |      |     |          |     |
|    | Ruijie(config-ap)#channel 6 radio 5            |    |      |     |          |     |
|    | Ruijie(config-ap)#channel 149 radio 6          |    |      |     |          |     |
| 2) | AM5528                                         | AP | 2.4G | 30% | 5.8G     | 35% |
|    | Ruijie(config)#ap-config AM5528                |    |      |     |          |     |
|    | Ruijie(config-ap)#power local 30 radio 802.11b |    |      |     |          |     |
|    | Ruijie(config-ap)#power local 35 radio 802.11a |    |      |     |          |     |

|               |         |           |             |            |
|---------------|---------|-----------|-------------|------------|
| 802.11a       | 802.11b |           | power       | chan-width |
| response-rssi | country | ampdu-rts | beacon rate |            |

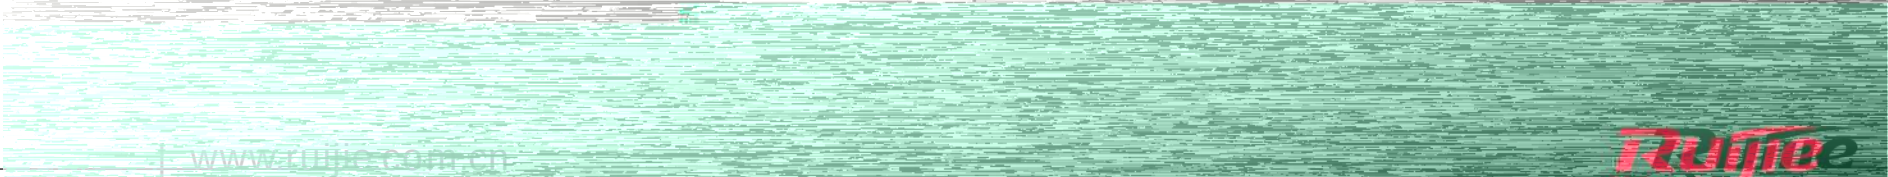

# AP

AP      AP

Ruijie(config)#ap-config AM5528

Ruijie(config-ap)# led on slot 1

no led on

AP

AP




AP

# AM5532

|        |       |   |       |   |                                    |
|--------|-------|---|-------|---|------------------------------------|
| AM5532 | 25~32 |   |       | 4 |                                    |
|        | 4     |   |       |   |                                    |
| 1      | mixed | 2 | 2     |   | 27 28 /31 323(P810Q/P 4MCID 7 an 2 |
| 2      | 4GE   | 4 | 25~28 | 4 | 29~32                              |
| 3      | 4SFP+ | 4 | 29~32 | 4 |                                    |

# AM5532



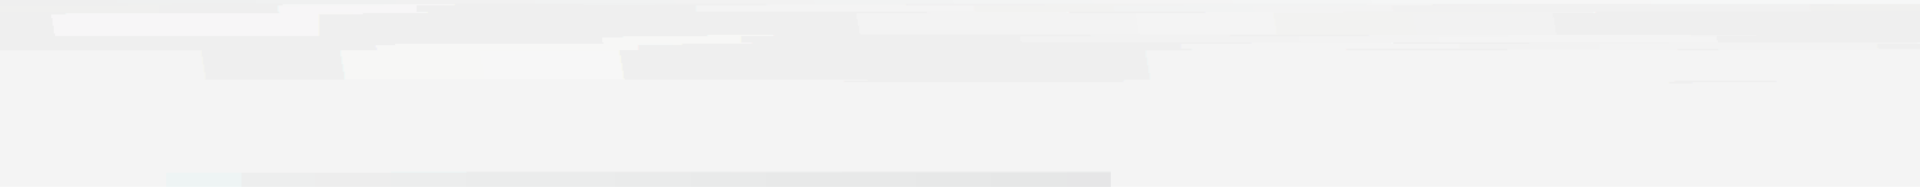

# AM5528(EP)& MAP752(T)

# VLAN

MAP752(T)    ibeacon    AC    ibeacon uuid uuid major major  
minor minor radio slotid    AP    radio  
AP    radio    ibeacon    ibeacon  
+

MAP752(T)    +    IOTP    +  
DHCP OPTION 224    IOTP    AP    IOTP  
ibeacon    IOTP    IOTP    AC    ibeacon  
AP    IOTP    AC    IOTP  
+

AP    AP    AM5528(EP)  
MAP752(T)    AM5528(EP)  
AM5528    MAP752(T)

[www.ruijie.com.cn](http://www.ruijie.com.cn)

[www.ruijie.com.cn/service.aspx](http://www.ruijie.com.cn/service.aspx)

[support.ruijie.com.cn](http://support.ruijie.com.cn)

[webchat.ruijie.com.cn](http://webchat.ruijie.com.cn)

4008-111-000