

RG - MCP_1.35_Build20160318

V1.0

copyright 2013-2016



-
-
-

- <http://www.ruijie.com.cn/>
- <http://webchat.ruijie.com.cn>
- <http://www.ruijie.com.cn/service.aspx>
- 7 × 24 4008-111-000
- <http://bbs.ruijie.com.cn/portal.php>
- <http://www.ruijie.com.cn/service/know.aspx>
- 4008111000@ruijie.com.cn

	£			£	œ		£
	£			£	œ		£
	£	¢	¢	£	œ	£	
	/		£		£		

1

1.1

1.1.1

CPU	4 2.0GHz	
	24G	
	1T	
	Centos 6.6()	X64

()

/ Linux 204800MB
 /tmp
 10240MB
 swap 1~2 32G 64GB
 /project 204800MB
 /bak: 204800MB
 /mcp
 100G

MCP centos

IP

80	80	TCP		MCP
3478	3478	UDP		MCP
3479	3479	UDP		MCP
22	22	TCP		MCP SSH


```

Disk /dev/sdb: 53.7 GB, 53687091200 bytes
255 heads, 63 sectors/track, 6527 cylinders
Units = cylinders of 16065 * 512 = 8225280 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes

    id      | 1
-----+-----
Device      | /dev/sdb2
Boot        | 1
Start       | 1
End         | 6527
Blocks      | 5242896
Id          | 8e
System      | Linux LVM

```

U /mnt mount -o loop /dev/sdb2 /mnt/ mount tmp

```

/dev/sdb2 512 1 22390/104 8e Linux LVM
Disk /dev/sdb: 53.7 GB, 53687091200 bytes
255 heads, 63 sectors/track, 6527 cylinders
Units = cylinders of 16065 * 512 = 8225280 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes

    id      | 1
-----+-----
Device      | /dev/sdb2
Boot        | 1
Start       | 1
End         | 6527
Blocks      | 5242896
Id          | 8e
System      | Linux LVM

```

1.1.3.3. http/ftp ISO

```

MCP http/ftp http/ftp
http http HFS wget http://
/ ( wget yum install wget
)

cd /home home
wget http://172.18.3.33/RG-MCP_v1.35_Build20160318.iso
home wget xxx

ftp wget ftp://ftp :ftp @ / /
wget ftp://www@192.168.0.1/mcp/RG-MCP_v1.35_Build20160318.iso
ISO mount -o loop / / /mnt/

home
mount -o loop /home/RG-MCP_v1.35_Build20160318.iso /mnt

```


MCP

1.2.2 T@†Ô83(IP 0 0 10.174 0 Td [(M)-3(C9.967 /C2_0 1 6EA09F1 <0676.7>-

```
1          soft          cd /bak/soft/
```

```
./setInternetNetwork.sh.x -localhostip 172.18.117.94 -internetip 210.210.210.210 -rootpw ADMINadmin123
```

1	-localhostip	IP		IP		IP
Ps	-localhostip	IP				
2	-internetip	IP	NAT	IP		IP
Ps	-internetip	IP				
3	-rootpw	root				
12						
Ps						

1.2.3

1.2.3.1. MCP

```
jps -l ( crt )
```

```
[root@localhost ~]# jps -l
4491 sun.tools.jps.Jps
3071 ./data.jar
3272 ./redis-consumer.jar
3007 ./redis-echo-replication-2.0.0.jar
```

```
[root@localhost ~]# netstat -an |grep 3479
udp        0      0 :::ffff:127.0.0.1:3479    :::*           off (0.00/0/0)
udp        0      0 :::ffff:172.18.34.147:3479 :::*           off (0.00/0/0)
[root@localhost ~]#
```

```

[root@localhost ~]# netstat -aon|grep 80
tcp        0      0 0.0.0.0:80          0.0.0.0:*          LISTEN     off (0.00/0/0)
tcp        0      0 ::ffff:127.0.0.1:8006  :::*              LISTEN     off (0.00/0/0)
tcp        0      0 :::8010            :::*              LISTEN     off (0.00/0/0)
tcp        0      0 :::8080            :::*              LISTEN     off (0.00/0/0)
tcp        0      0 :::20880           :::*              LISTEN     off (0.00/0/0)
tcp        0      0 ::ffff:127.0.0.1:8080  ::ffff:127.0.0.1:41509 TIME_WAIT  timewait (21.80/0/0)
tcp        0      0 ::ffff:172.18.3.62:57178  ::ffff:172.18.3.62:20880 ESTABLISHED keepalive (4468.41/0/0)
tcp        0      0 ::ffff:172.18.3.62:57159  ::ffff:172.18.3.62:20880 ESTABLISHED keepalive (4450.40/0/0)

```

1.2.3.3. log

ESC :q! [q]

```
vi /project/data/logs/data-middleware.log
```

```
vi /project/redis-consumer/logs/redis-consumer.log
```

```
vi /bak/soft/apache-tomcat-7.0.55/logs/catalina.out
```

error

1.2.3.4.

```
iptables -nL
```

```
[root@localhost ~]# iptables -nL
Chain INPUT (policy ACCEPT)
target     prot opt source                destination
ACCEPT     tcp  --  0.0.0.0/0              0.0.0.0/0          tcp dpt:22
ACCEPT     tcp  --  0.0.0.0/0              0.0.0.0/0          tcp dpt:80
ACCEPT     udp  --  0.0.0.0/0              0.0.0.0/0          udp dpt:3479
ACCEPT     udp  --  0.0.0.0/0              0.0.0.0/0          udp dpt:3478
ACCEPT     tcp  --  0.0.0.0/0              0.0.0.0/0          tcp dpt:3479
ACCEPT     tcp  --  0.0.0.0/0              0.0.0.0/0          tcp dpt:3478
ACCEPT     tcp  --  0.0.0.0/0              0.0.0.0/0          tcp dpt:70

Chain FORWARD (policy ACCEPT)
target     prot opt source                destination

Chain OUTPUT (policy ACCEPT)
target     prot opt source                destination
[root@localhost ~]#
```

1.2.3.5. MCP

MCP

mcp

1111111111

mcp



2

2.1 MCP

2.1.1 MCP



2.1.2 ip

```
ip MCP
setInternetNetwork.sh.x
businessconfig
vi /alidata/wmc_common_config/businessconfig.properties i
IP IP wq
```



```
upstream 172.18.86.160 {  
    server 127.0.0.1:8080 max_fails=2;  
}
```

```
upstream tr069 {  
    server 127.0.0.1:8080;  
    keepalive 1024;  
}
```

```
server {  
    listen      80;  
    server_name localhost:.....
```

如果是内网IP，则为本地网卡的IP地址。

```

}
location ~*.(gif|jpg|jpeg|js|css|bmp|png)$ {
    proxy_next_upstream error timeout http_500 http_502 http_504 http_404;
    proxy_read_timeout 20s;
    proxy_redirect      off;
    # nginx非80端口处理
    proxy_set_header    Host $host:$server_port;
    proxy_set_header    Cookie $http_cookie;
    proxy_set_header    REMOTE_HOST $remote_addr;
    # 获取真实IP
    proxy_set_header    X-Real-IP $remote_addr;
    # 获取代理者的真实ip
    proxy_set_header    X-Forwarded-For $proxy_add_x_forwarded_for;
    client_max_body_size 50m;
    client_body_buffer_size 128k;
    proxy_send_timeout 600s;
    proxy_buffer_size 4k;
    proxy_buffers 4 32k;
    proxy_busy_buffers_size 64k;
    proxy_temp_file_write_size 64k;
    proxy_pass http://172.18.86.160;
}

location / {
    proxy_next_upstream error timeout http_500 http_502 http_504 http_404;
    proxy_read_timeout 20s;
    proxy_redirect      off;
    # nginx非80端口处理
    proxy_set_header    Host $host:$server_port;
    proxy_set_header    Cookie $http_cookie;
    proxy_set_header    REMOTE_HOST $remote_addr;
    proxy_set_header    X-Real-IP $remote_addr;
    proxy_set_header    X-Forwarded-For $proxy_add_x_forwarded_for;
    client_max_body_size 50m;
    client_body_buffer_size 128k;

```


2.2 SecureFXPortable.exe



SecureFXPortable.exe

SFTP

linux


SecureFXPortable

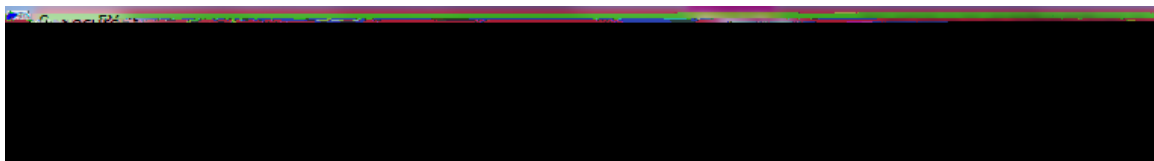

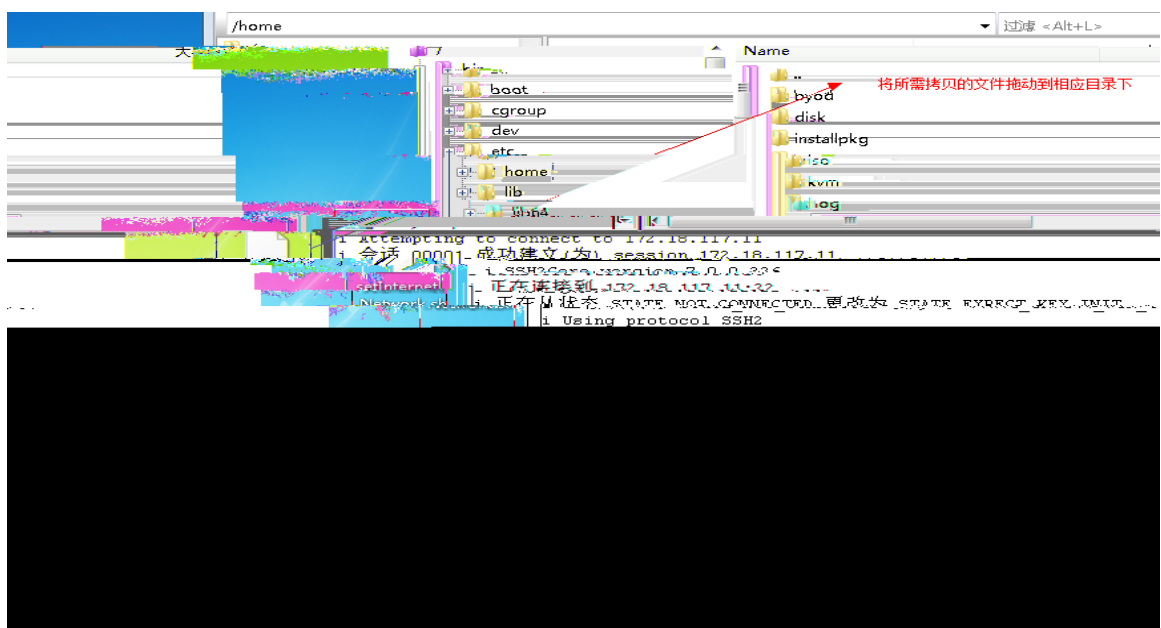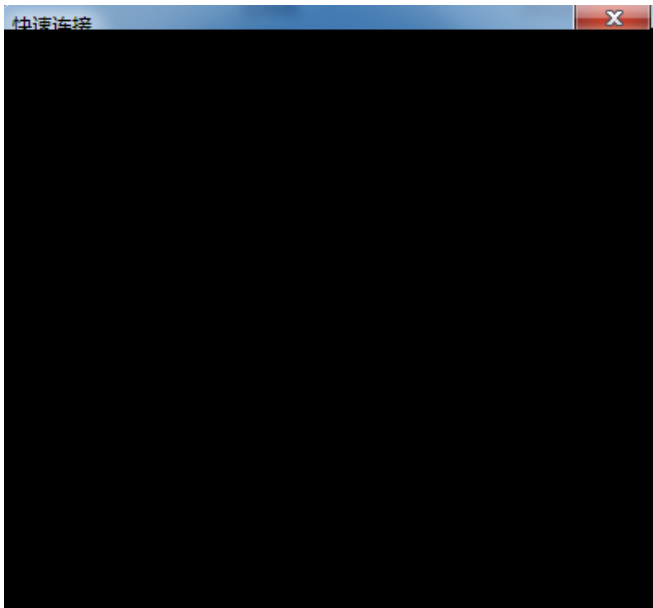


c S`


SCRT

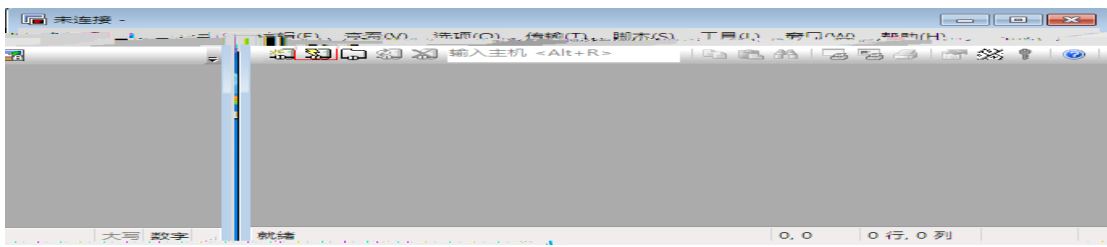

ip

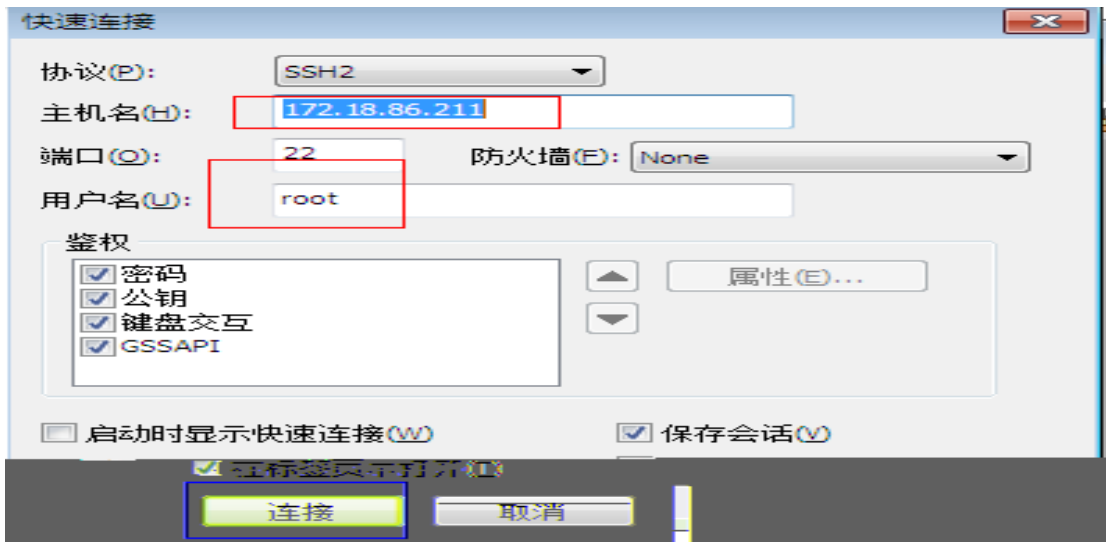

123456

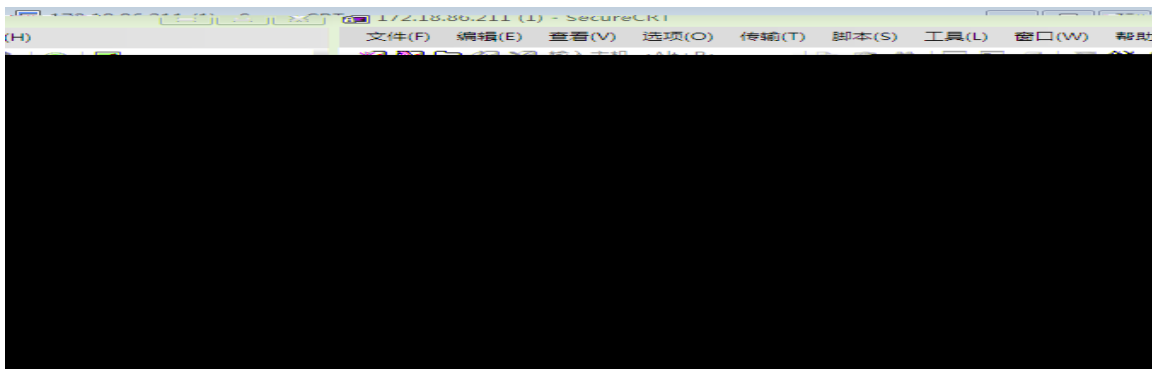

:

