



III



I ậ Ớ Ạ ỉ ấ

I ħ W Λ ĩ ã

ò ħ Ä Ħ ä º ħ ¥ ħ º a `H º ~ ħ "A ħ M ħ "H Ħ




ħ ¥ ä ħ ħ º U M ħ ħ % ä ħ ħ C:\RG-Wlock\tomcat\webapps\javakeeper\download\backupconfig

名称	大小	类型	修改日期	属性
.73556.db	91 KB	数据库文件	2017-3-24 17:36	A 201703241
.32602.db	92 KB	数据库文件	2017-3-24 23:26	A 201703242
.32644.db	92 KB	数据库文件	2017-3-24 23:26	A 201703242

I ħ W Λ ĩ ã

1 1 ŵ ʏ ˘ ĩ 5 ↑

. 1 ŵ ʏ ĩ* W Ĩ~ “ ʔ ĩ ” ↑ Õ

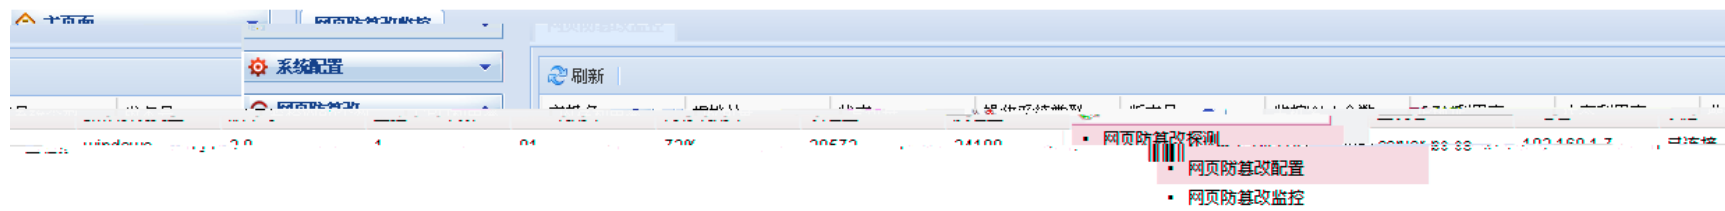

2 Λ ŷ ʏ ˘ ĩ 5 ↑

. 1 ŵ ʏ ĩ* W Ĩ~ “ ʔ ĩ ” ↑ Õ




1 ầ Ồ ๗ 5†

ñ Õ è ü ħ / ˆ 1 è ü ı ã ñ Ġ . ˘ ı 85% 2 3 ɐ 3 "Ų Ÿ ĵ "A ã ı Ŵ60 3 3 ˆ

$$\S \quad \eta \quad \tilde{O} \quad \mathcal{L} \quad k \quad \tau$$

l h Ồ l k 7

$\gamma \dot{\eta} \tilde{O}$ λ $\tau Y \dot{i}$ "A ∂ λ $\dot{i}$ "A $\acute{o}$ ϵ $t_{syslog} O n_H$

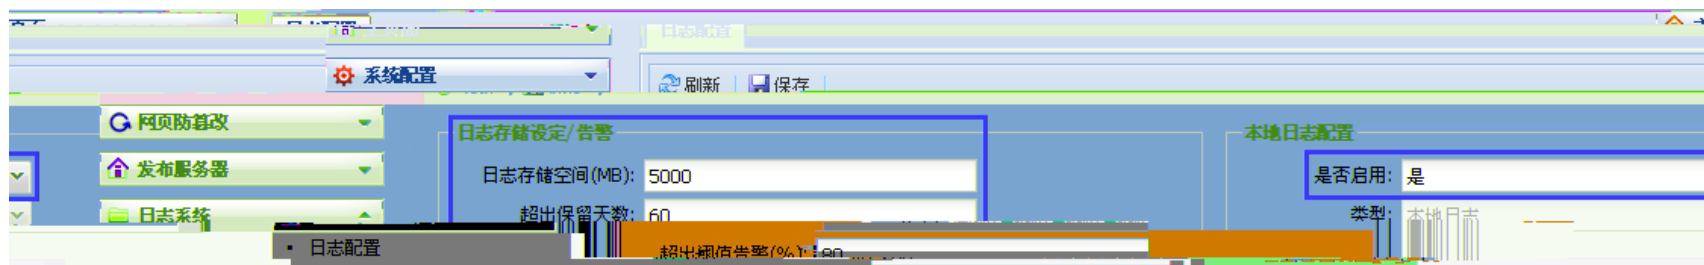

3. $\eta \in \mathcal{O}_K$ such that $\eta \equiv 1 \pmod{\mathfrak{p}}$ and $\eta \not\equiv 1 \pmod{\mathfrak{p}^2}$.

Ruite



III

I W J T

^ 'On H Y G á T á p 1 T O ñ | ñ ½ · ã ã ñ | ñ ½ · 3

3 + 1 T O ã ã j "A Y "A p H [OBJ] ♀ m ≡ ÷ H ã J A

3 + 'On H [OBJ] e ÷ V [OBJ] M7

3 # 'On H [OBJ] O ã ã j A Y A p M7 H [OBJ] ♀ m ≡ ÷ H ã J A



ptables

♀ m M 3 B L

~ 'A ã ñ ½ V [OBJ] e

Window2003 On H ñ ½ e 'A ã ã [OBJ] 3 ½ — L — R ó — V e

Centos M A vi /etc/sysconfig/network

I W J T

1 ǫ λ ι H ĭ ι ǫ p 1 T Q ≡ ǫ ħ Ō f ι

1 T Q 1 ǫ γ [OBJ]UDP 514 γ Æ Ą æ b ǎ ♀ η ≡ ǫ ǫ

p 1 T Q UDP H γ a H p ĭ ´ ę Ī ǫ ≡ ǫ ~ ´ ǫ ħ Ō " Ų Ų ĩ
b ´ ≡ ǫ 1 T Q 1 ǫ γ [OBJ]UDP 514 γ Æ Ą
ð ĭ " A B ´ ǎ ´ ę ħ ĩ ǫ ´ H t [OBJ] V ʒ





III

W Ĩ Ä Ñ

E √ l, κ ã W ĩ “ 3 U ǒ ” K Ó ǒ “A ǎ τ ó Γ à H Ĩ H Y
O ‘ ‘ ħ H




W Ā Ĭ Ů

Ping Ĭ

Ů Ā Ĭ Ů => Ping Ĭ Ĭ Ĭ

Ů Ů ĩ Ā IP Ŝ ŷ Ĭ

ĳ = IP Ŝ ŷ [OBJ]

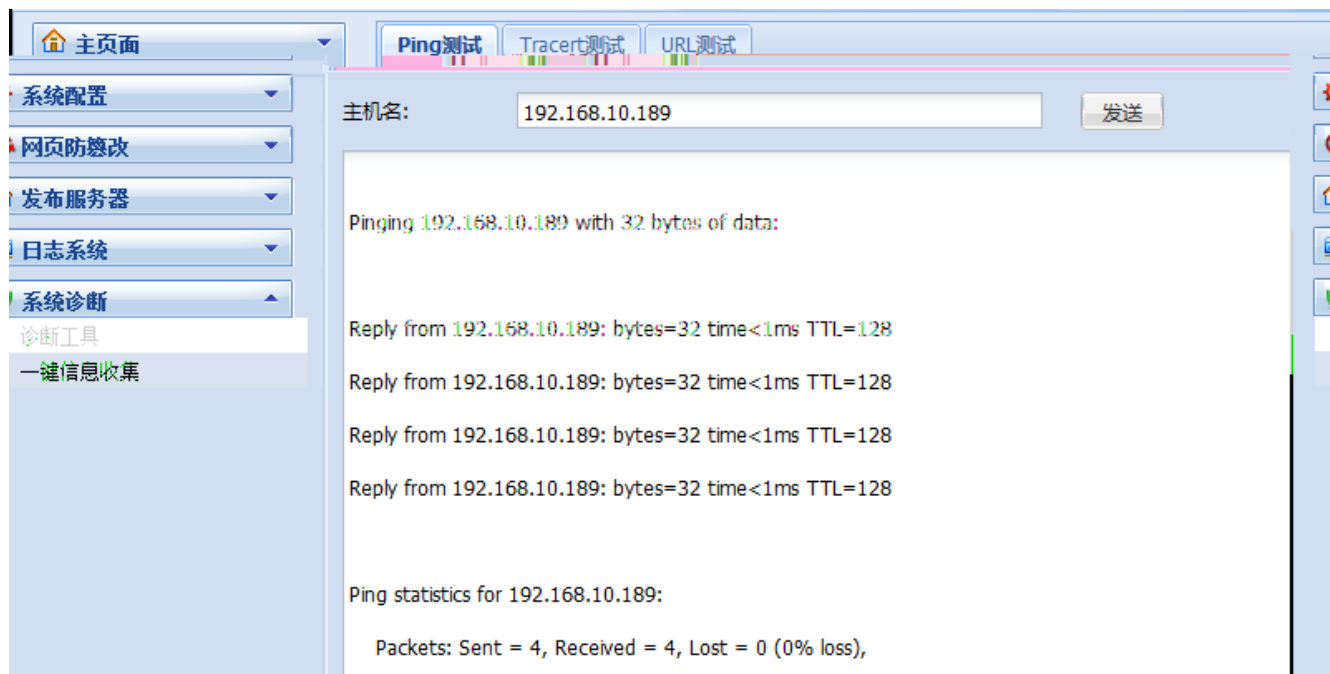

RuĬe



III

5 ' 'On

à h 'A

www.ruijie.com.cn

τ = ă 6

www.ruijie.com.cn/service.aspx

à √ Λ 'H

'On

3

bbs.ruijie.com.cn

γ 'H ~H'Y

p 1 j 'O

webchat.ruijie.com.cn

'H ~H'Y 1

4008-111-000